

ATTACHMENT A

STATE REGISTER NOTICE OF PROPOSED REGULATION FOR R.61-56, *Onsite Wastewater Systems*

August 13, 2020

Document No. _____

DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL CHAPTER 61

Statutory Authority: 1976 Code Sections 44-1-140(11), 44-1-150, 44-55-825, 44-55-827, and 48-1-10 et seq.

61-55. Septic Tank Site Evaluation Fees.

61-56. Onsite Wastewater Systems.

61-56.1. License to Construct or Clean Onsite Sewage Treatment and Disposal Systems and Self-Contained Toilets.

61-56.2. Licensing of Onsite Wastewater Systems Master Contractors.

Preamble:

Pursuant to R.61-56, the Department provides oversight for safe treatment and disposal of domestic wastewater to protect the health of families and communities. In accordance with R.61-55, R.61-56, R.61-56.1, and R.61-56.2, the Department issues onsite wastewater contractor licenses, permits to construct, and approvals to operate for individual onsite wastewater treatment systems (septic systems).

The Department proposes amending R.61-56, Onsite Wastewater Systems, to add new system standards, clarify and amend definitions, and clarify and update selected sections. The amendments will modernize the regulation and streamline permitting procedures to address needed updates in administering the Onsite Wastewater program.

The Department also proposes amending provisions of R.61-56.1 and R.61-56.2 and merging R.61-56.1 and R.61-56.2 into R.61-56 to improve efficiency and clarity for regulated entities and the public. This will entail repealing R.61-56.1 and R.61-56.2 and simultaneously adding their provisions, as amended, to R.61-56. The proposed amendments include changes to licensing requirements for pumpers and haulers currently under R.61-56.1. The proposed amendments will revise provisions currently contained in R.61-56.2 to implement a tiered licensing program to establish improved competency of onsite wastewater system contractors/installers. This approach includes new requirements for examination and continuing education. In addition, because R.61-56.1 and R.61-56.2 are being combined with R.61-56, previously separate enforcement provisions will also be consolidated and updated for clarity and to improve administration of the Onsite Wastewater program.

The proposed revisions would expand existing site evaluation options and allow more streamlined permit processing by allowing an applicant to submit a proposed system layout from a licensed Professional Soil Classifier ("PSC"). Under the proposal, applicants desiring to install systems for a subdivision would be required to submit third-party soils work from a PSC. The PSC would then have the option to either submit a proposed system layout under one of the system standards established within R.61-56 or give the soils report to a Registered Professional Engineer to design a specialized septic system through the 610 Standard. Subdivision permit applicants may incur additional costs for the third-party work performed by a PSC under this process. Outside of the subdivision context, applicants for conventional systems will retain the option

to use a PSC or allow the Department to conduct a soil evaluation and prepare a system layout. The expanded options and enhanced involvement of third-party PSCs will serve to streamline and expedite the permit process for the Department and the regulated community.

In the interest of efficiency, the Department also proposes repealing R.61-55 and adding its provisions to R.61-56. The proposed amendments related to R.61-55 include amendments to definitions and other changes as necessary to facilitate merging this regulation into R.61-56.

The Department also proposes other corrections for clarity and readability, grammar, punctuation, codification, and regulation text improvement.

The Administrative Procedures Act, S.C. Code Section 1-23-120(A), requires General Assembly review of these proposed amendments and repeals.

The Department had a Notice of Drafting published in the March 27, 2020, South Carolina State Register.

Section-by-Section Discussion of Proposed Amendments and Repeals:

R.61-55

Repealed R.61-55 and combined it, as amended, with R.61-56 for simplification purposes.

R.61-56

Amended text throughout to correct capitalization, punctuation, spelling, formatting, codification, internal citations, and grammatical errors. Also amended “gallons per day” to the abbreviation “gpd” except for one instance. For brevity and space, these modifications are not listed. Corrected references to consistently identify “Registered Professional Engineers licensed in South Carolina.” Corrected numerical references to include both narrative number and parenthetical for consistency (e.g., “one (1) foot”).

Statutory Authority

Added S.C. Code Sections 44-55-825 and 44-55-827.

Table of Contents

Amended section titles, added new sections, and renumbered sections to reflect amendments made in text.

Section 100 Purposes and Scope

Amended: Deleted “human waste” and replaced with “domestic wastewater” for clarity.

Amended: Deleted “best and” and “cost affective” and added “effective” for grammatical purposes.

In Section 101, Definitions and References, the following changes apply:

Added: “Drain Field” and “Absorption Trench” to the “Alternative System” definition due to these being common names used for wastewater infiltration trench within the industry and public.

Added: Definition of “Bond.” Definition incorporated from 61-56.2

Added: Definition of “Cleaning.” Definition incorporated from R.61-56.1.

Added: Definition of “Construction.” Definition incorporated from R.61-56.1 and clarified.

Replaced: Definition of “Domestic Wastewater or Sewage” with separate definitions for “Domestic Wastewater” and “Sewage” to clarify and avoid duplication.

Added: Definition of “Dwelling” to encompass multiple types of residential structures for which an onsite wastewater system would be required, including tiny homes and park model RVs.

Amended: Definition of “Existing System” to replace “residence” with “dwelling” for internal consistency.

Relocated: Definition of “Gleying” so that the definitions remain alphabetized.

Added: Definition of “Gray Water” to accommodate its potential separation from other toilet wastewater within Appendix S, Appendix T, and Appendix U.

Added: Definition of “Gray Water Subsurface Reuse Systems” to address sites where gray water subsurface reuse is desired.

Added: Definition of “License.” Definition incorporated from R.61-56.1 and R.61-56.2.

Added: Definition of “Licensed Onsite Wastewater System Installer” to define the term and specify the scope of authorized activities for each “Tier 1 Installers,” “Tier 2 Installers,” and “Tier 3 Installers.”

Added: Definition of “Nonwater-Carried Sewage Treatment System” to address sites that do not qualify for a conventional, alternative, or engineered onsite wastewater system.

Amended: Definition of “Onsite Wastewater System” to add “Commercial Onsite Wastewater System” for clarity due to this term being used throughout the regulation. Also added language for clarification as it relates to gray water.

Added: Definition of “Other Sewage Holding System.” This term was added to encompass sewage holding systems other than onsite wastewater systems and self-contained toilets to which pumper/hauler requirements of the regulation are applicable.

Amended: Definition of “Perched Zone of Saturation” to remove “A soil horizon that is a perched water table soil horizon that is intermittently saturated with water above a soil horizon that is not saturated with water” and replace with “a saturated zone above an unsaturated zone” for simplicity.

Amended: Definition of “Permit” to add “nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system” to accommodate the addition of these new systems. Added language to describe the two parts of a permit, which are a permit to construct and approval to operate, for clarification. Also removed “survives” and replaced with “remains in effect for” for clarification.

Added: Definition of “Pumping and Transporting Vehicle” for clarification on the vehicles the Department approves for cleaning and transporting septage and sewage.

Amended: Definition of “Redox Depletions” to remove “seasonally” for accuracy because saturated conditions can occur at any time of the year.

Amended: Definition of “Redoximorphic Feature” to remove “seasonally” for accuracy because saturated conditions can occur at any time of the year.

Amended: Definition of “Repair” to remove “surface” and replace with “system,” added “malfunction,” and removed “relocating” and replaced with “relocation or replacement” for clarification.

Amended: Definition of “Repair or Replacement Area” to specify that the area will be identified on the Permit to Construct.

Added: Definition of “Revocation.” Definition incorporated from R.61-56.1 and R.61-56.2 and expanded to encompass licenses, permits, and approvals to operate.

Added: Definition of “Rippable Rock” to further define this term that was previously located in Appendix J.

Added: Definition of “Self-Contained Toilet.” Definition incorporated from R.61-56.1.

Added: Definition of “Septage.” Definition incorporated from R.61-56.1.

Added: Definition of “Sewage.” Definition incorporated from R.61-56.1.

Added: Definition of “Site” for clarification on an area or plot of land that can be evaluated for an onsite wastewater system.

Added: Definition of “Soils Report” for clarification due to Professional Soil Classifiers issuing these reports to the Department for the purpose of a site evaluation.

Amended: Definition of “Standard” for clarity and to encompass full scope of standards included in the regulation.

Added: Definition of “Subdivision” for clarification and to align with the proposed revisions to the onsite wastewater evaluation/permitting process.

Added: Definition of “Suspension.” Definition incorporated from R.61-56.1 and R.61-56.2 and expanded to include permits to construct, approvals to operate, and licenses.

Added: Definition of “Third-Party” for general clarification and to align with the proposed revisions of third-party involvement during the onsite wastewater evaluation/permitting process.

Added: Definition of “Wastewater Characteristics” to specifically identify what type of wastewater this regulation is referring to for clarity.

Added: Definition of “Wastewater Combustion System” to address sites that do not qualify for a conventional, alternative, or engineered onsite wastewater system.

Amended: Definition of “Wastewater Infiltration Trench” to remove language that is obsolete due to the addition of System Standard 100.

Section 101.2(1) & (2). Removed these sections to align with other Department regulations for consistency.

Section 101.2(3). Renumbered to adjust the codification.

Section 102 Onsite Wastewater System Site Evaluation and Fees

Section 102.1(1). Added to clarify when site evaluation fees are due.

Section 102.1(2). Added to clarify which individuals are authorized to conduct soil evaluations for onsite wastewater systems.

Section 102.1(3). Added to clarify which individuals are authorized to produce system layouts of onsite wastewater systems.

Section 102.1(4). Added to clarify which particular systems Registered Professional Engineers must design.

Section 102.2(5). Added to propose a new approach to onsite wastewater system soil evaluations and system layouts for subdivisions.

Section 102.2. Incorporated and amended language from R.61-55 in reference to onsite wastewater site evaluation fees for clarity.

Section 102.3. Incorporated language from R.61-55 regarding how fees derived by onsite wastewater program will be utilized.

Section 103 Onsite Wastewater Systems (formerly Section 102 General)

Section 103 (formerly 102) was renumbered to adjust the codification and retitled for clarity.

Section 103.1(1). Deleted “unit, building” and left the word “dwelling” to align with new definition of dwelling which encompasses many structures.

Section 103.1(2). Added clarification to require a permit for Nonwater-Carried Sewage Treatment Systems, Wastewater Combustion Systems, and Gray Water Subsurface Reuse Systems.

Section 103.1(3). Deleted “building” and added “dwelling, business, or other structure” for internal consistency. Added clarification regarding need for permit for Nonwater-Carried Sewage Treatment Systems, Wastewater Combustion Systems, and Gray Water Subsurface Reuse Systems.

Section 103.1(4). Deleted “permit holder” and added “property owner,” added “all onsite wastewater system(s) and their parts,” deleted “and operate as efficiently as possible, all facilities and systems which are installed pursuant to the permit,” added “previously issued,” and added “system parts may include, but are not limited to, sealed watertight tanks, lid(s), piping, aggregate, pump, and pump components” for clarification.

Section 103.1(5)(b). Rephrased the beginning of the provision to read “If a public entity owns the system, the entity” for clarity.

Section 103.1(5)(e). Added title of R.61-67.300 for clarification.

Section 103.2. Added title of R.61-9.505 for clarification.

Section 103.3. Added “Bureau of Water” and deleted “Department” for clarity. Deleted “assess the risk to public health and/or groundwater contamination” and added “determine if the waste may cause a violation of any drinking water standard under R.61-58.5 or may otherwise adversely affect the health of persons” for clarification per the Bureau of Water.

Section 103.4(3). Deleted “unsewered” so as not to duplicate the first sentence within this section that already details the campgrounds not being furnished with sewer service connections.

Deleted former Section 102.6 to simplify and avoid duplication of information in the large system standard (System Standard 150) and specialized system standard (System Standard 610).

Section 104 Application, Permit, Final Inspection, and Approval (formerly Section 103 Application, Permit, Approval)

Section 104 (formerly 103) was renumbered to adjust the codification and retitled to encompass final inspection.

Section 104.1(1). Added “in a format as identified” and deleted “on the application form provided” as well as added “complete and accurate” and deleted “correct” for clarification and grammatical reasons.

Section 104.1(2). Added this section pertaining to written permission from property owners for the Department to access their lot for site evaluations to align with current application requirements.

Section 104.1(3). Deleted “and its boundaries” and added “The Department may require a legal description that includes lot boundary lengths” for clarification on required plats, deeds, or other legal document to ensure boundary lengths are included on all when submitted with the onsite wastewater system application.

Section 104.1(5). Added this section pertaining to backhoe pit requirement in certain regions of the state to improve efficiency of site evaluations.

Section 104.1(6). Replaced “may” with “shall” to clarify mandatory nature of requirements. Added “pertinent” when referring to marking property boundary lines and corners due to large acre lots not requiring all lines and corners be marked, just the ones positioned near the proposed onsite wastewater system. Added “as well as proposed drain field area” for clarification. Added “A site sketch shall be included on the application or as a separate attachment that reflects the items above, and any other items specified on the application” to align with current application requirements.

Section 104.1(7). Added language to clarify when the Department will not issue a permit, as well as to clarify that the Department has the right to modify a system layout submitted by a Professional Soil Classifier when deemed appropriate.

Section 104.2(1). Amended first sentence to include nonwater-carried sewage treatment systems, wastewater combustion systems, and gray water subsurface reuse systems. Amended first sentence to provide clarification on the need for both a permit to construct and approval to operate. Amended language to better clarify how applicants should submit requests for permit modifications and to expressly specify when a fee will be assessed for modifications. Added language referring to relocating or replacement of a system or system components.

Section 104.2(2). Added “permitted” and removed “onsite wastewater” to encompass all systems including nonwater-carried sewage treatment systems, wastewater combustion systems, and gray water subsurface reuse systems.

Former Section 103.2(3). Deleted language because it is no longer applicable.

Former Section 103.3. Deleted in entirety in light of updated language concerning final inspections and approval in the newly proposed Section 104.3.

Section 104.3. Added to clarify which individuals are authorized to conduct final inspections for onsite wastewater systems, how final inspections should be conducted and scheduled, what documentation should be submitted to the Department, and the Department process for issuance of Approval to Operate.

Section 200 Minimum Site Conditions

Section 200.6. Renumbered to adjust the codification and titled to encompass all setbacks.

Section 200.6(1). Added “excluding solid pipes” language to denote that solid pipes do not require the same setbacks as the rest of the onsite wastewater system.

Section 200.6(1)(b). Deleted and relocated to the large system standard the language pertaining to setback to a receptor. Also deleted language pertaining to a public well because such language is stated in 200.6(1)(c).

Section 200.6(1)(d). Added “and retention ponds” language to address setbacks to retention ponds which were not previously addressed within the regulation.

Section 200.6(1)(f). Added “including any detention ponds (determined by maximum water elevation)” language to address setbacks to detention ponds which were not previously addressed within the regulation.

Section 200.6(1)(g). Added language to address setbacks to piped drainage ditches which were not previously addressed within the regulation.

Section 200.6(1)(h). Added language to address setbacks to inground pools which were not previously addressed within the regulation.

Section 200.6(1)(i). Added language to address setbacks to basements which were not previously addressed within the regulation.

Section 200.6(2). Removed “alternative” to reflect all system standards.

Section 200.6(3). Amended previous language in certain system standards pertaining to jurisdictional wetlands and relocated it here so that it reflects all system standards.

Section 200.7(1). Deleted language referring to impervious material and relocated language to section 200.7(2).

Section 200.8. Amended to correct internal citation.

Section 201 Minimum Requirements for Onsite Wastewater System Primary Treatment

Section 201, Title. Amended section title to specify “Onsite Wastewater System.”

Section 201.1(4). Deleted “including condominiums, apartments, and mobile homes” to align with new definition of dwelling which encompasses many structures. Added “septic tank” to clarify minimum septic tank capacities required for multiple dwellings.

Section 201.2(1). Amended language referring to when a grease trap is required for clarification.

Section 201.2(2). Amended language so that any existing food service establishment that experiences a malfunction as a result of grease accumulation will be required to comply with all portions of the regulation for consistency.

Section 201.3. Added “requested by a Registered Professional Engineer” for clarification.

Section 202 Minimum Requirements for Onsite Wastewater System Final Treatment and Disposal Systems

Section 202, Title. Amended section title to specify “Onsite Wastewater System.”

Section 202.1(8). Amended references to former Appendix R and former Appendix Q to align with new codification.

Section 203 Onsite Wastewater System Construction Criteria

Section 203, Title. Amended section title to specify “Onsite Wastewater System.”

Section 203.8. Added “Class” in front of each roman numeral for clarification.

Section 204 Evaluation of Alternative Infiltration Trench Products

Section 204.2(3)(a). Amended equation for “Trench Sidewalls” to replace the division sign with a multiplication sign.

Section 204.4. Deleted “backfill” and added “soil cover.” Deleted “Unless a lesser amount is approved by the department” to adequately describe the fill material.

Former Section 302 Enforcement Provisions

Former Section 302. Deleted in its entirety so that its relevant terms could be consolidated with all other enforcement provisions in Section 800.

Former Section 303 Repeal and Date of Effect

Former Section 303. Deleted section as obsolete.

Section 302 Changes in Use That Impact Existing Onsite Wastewater Systems (formerly Section 304)

Section 302 (formerly 304) was renumbered to adjust to the deleted former Sections 302 and 303.

Amended language for clarification on submission of an application and receipt of a permit to construct for an upgrade or expansion prior to making alterations.

Former Section 305 Severability Clause

Former Section 305. Deleted to eliminate duplication within the regulation.

Section 400 Appendices of Standards for Permitted Systems

Section 400, Title. Section 400, Title, is amended to replace “Onsite Wastewater” with “Permitted” to encompass all permitted systems.

Section 400 section numbers have been deleted so only appendices represent each section.

Each Appendix has been renumbered to adjust codification.

Appendix A. Added Appendix A and associated diagram to represent a conventional onsite wastewater system for clarification.

Appendix B(1)(a). Amended language to require Registered Professional Engineers to design System Standard 150 systems.

Appendix B(1)(b). Added this deleted language from section 200.6 as this statement specifically refers to the large system standard.

Appendix B(1)(h)(iv). Amended to correct internal citation.

Appendix B(3)(g). Amended language for clarity and to encompass all system components.

Appendix C(1)(c). Added “Class” in front of the roman numerals for clarification.

Appendix C(1)(g). Removed “Level installations on slightly sloping sites can be considered if the above requirement can be met” to align with the first sentence of the paragraph stating system must not be used on sloping sites unless specified requirements are met.

Former Appendix B, Section 402.2(1). Deleted to allow serial distribution if it can be demonstrated.

Appendix C(2)(b). Deleted “maximum” and “the minimum width shall be eighteen (18) inches.” This standard requires that the only permissible trench width be thirty-six (36) inches.

Appendix C System Standard Diagram. Amended for diagram clarity, to add “Services” to the Department name, and to align with the revised trench width in Appendix C(2)(b).

Appendix D(1)(c). Added “Class” in front of the roman numerals for clarification.

Appendix D(1)(g). Removed “Level installations on slightly sloping sites can be considered if the above requirement can be met” to align with the first sentence of the paragraph stating system must not be used on sloping sites unless specified requirements are met.

Former Appendix C, Section 403.2(1). Deleted to allow serial distribution if it can be demonstrated.

Appendix D(2)(b). Deleted “maximum” and “the minimum width shall be eighteen (18) inches.” This standard requires that the only permissible trench width be thirty-six (36) inches.

Appendix D System Standard Diagram. Amended for diagram clarity, to add “Services” to the Department name, and to align with the revised trench width in Appendix D(2)(b).

Appendix E was renamed to align with title in Table of Contents.

Appendix E(1)(d). Amended language regarding sloping sites for clarification.

Appendix E(2)(a). Deleted “maximum,” “must not exceed,” and “the minimum width shall be eighteen (18) inches” and added “shall be.” This standard requires that the only permissible trench width be thirty-six (36) inches.

Appendix E(2)(c). Deleted “backfill” and added “of soil cover” for clarification. Fill caps are constructed from foreign soil brought to the site and not from backfill soil excavated from trenches on site. Deleted “see attached illustration” because language is not necessary.

Appendix E(2)(e). Added language regarding fill cap on sloping sites to address varying site conditions.

Appendix E System Standard Diagram. Amended for diagram clarity, to add “Services” to the Department name, and to align with the revised trench width in Appendix E(2)(a).

Appendix F(1)(d). Amended language regarding sloping sites for clarification.

Appendix F(2)(a). Deleted “maximum,” “must not exceed,” and “the minimum width shall be 18 inches” and added “shall be.” This standard requires that the only permissible trench width be thirty-six (36) inches.

Appendix F(2)(c). Deleted “see attached illustration” for consistency.

Appendix F(2)(e). Added language regarding fill cap on sloping sites to address varying site conditions.

Appendix F System Standard Diagram. Amended for diagram clarity, to add “Services” to the Department name, and to align with the revised trench width in Appendix F(2)(a).

Appendix G(1)(c). Amended to correct internal citation.

Appendix G(2)(a). Deleted “aggregate” and added “of approved aggregate” to clarify that only approved aggregate shall be utilized.

Appendix G System Standard Diagrams (A) and (B). Amended for diagram clarity and to add “Services” to the Department name.

Appendix H(1)(d). Amended language regarding sloping sites for clarification.

Appendix H(2)(a). Deleted “maximum,” “must not exceed,” and “the minimum width shall be eighteen (18) inches” and added “shall be.” This standard requires that the only permissible trench width be thirty-six (36) inches.

Appendix H(2)(d). Deleted “see attached illustration” for consistency.

Appendix H(2)(e). Added language regarding fill cap on sloping sites to address varying site conditions.

Appendix H System Standard Diagram. Amended for diagram clarity, to add “Services” to the Department name, and to align with the revised trench width in Appendix H(2)(a).

Former Appendix H, Section 408.1(1). Deleted to increase systems versatility to address varying site conditions.

Former Appendix H, Section 408.1(2). Deleted language because it is no longer applicable.

Appendix I(1)(d). Deleted table titled “Factors (F) for Maintaining Equivalent Infiltrative Surface Area” to avoid duplication with the system standard diagram. Deleted internal reference to the system diagram.

Appendix I(2)(a). Deleted “shall always be kept as narrow as possible” for simplicity.

Appendix I System Standard Diagram. Amended for diagram clarity, to add “Services” to the Department name, and to align the equation presented in the table on the diagram to the equation presented in section 204.2. Also corrected reference to total infiltrative surface area per linear foot of conventional type trench to read 5.33 sq ft/ft.

Appendix J(1)(a). Deleted internal citation to reflect the deletion of former Section 409.1(9)(b).

Former Appendix I, Section 409.1(9)(b). Deleted language because a more detailed definition of Rippable Rock was added in Section 101.1 Definitions.

Appendix J(2)(a). Deleted “aggregate” and added “of approved aggregate” to clarify that only approved aggregate shall be utilized.

Appendix J System Standard Diagram. Amended for diagram clarity and to add “Services” to the Department name.

Appendix K. Added Appendix K and associated diagram to represent an alternative trench width and depth system with fill cap to allow for conservative components of two different systems to be used in conjunction with one another depending on site conditions.

Former Appendix J, Section 410.1(3). Deleted language to increase systems versatility to address varying site conditions.

Former Appendix J, Section 410.2(1). Deleted language to increase systems versatility to address varying site conditions.

Appendix L(2)(c). Deleted “see attached sketch” for consistency.

Former Appendix J, Section 410.2(9). Deleted text and table as the same table is displayed in the system standard diagram.

Appendix L System Standard Diagram. Amended for diagram clarity and to add “Services” to the Department name.

Appendix M System Standard Diagram. Amended for diagram clarity and to add “Services” to the Department name.

Former Appendix L, Section 412.1(6). Deleted and relocated language to Section 200.6(3). All systems may be required to get approval from the appropriate permitting agency if it is determined a system is to be installed in a wetland.

Former Appendix L, Section 412.1(9). Deleted language due to the deletion and relocation of Appendix L, Section 412.1(6).

Appendix N(2)(b) and (2)(b)(ii). Amended to delete “see ref. sketch” for consistency.

Appendix N System Standard Diagram. Amended for diagram clarity and to add “Services” to the Department name.

Former Appendix M, Section 413.1(1). Deleted language due to the deletion and relocation of Appendix M, Section 413.1(9).

Former Appendix M, Section 413.1(9). Deleted and relocated language to Section 200.6(3). All systems may be required to get approval from the appropriate permitting agency if it is determined a system is to be installed in a wetland.

Appendix O(2)(b)(i). Deleted “seasonal” for accuracy because saturated conditions can occur at any time of the year.

Appendix O(2)(b)(ii) and (iii). Added language regarding individual system layout.

Appendix O(2)(b)(vii) and (viii). Added “class” in front of roman numeral for clarification. Deleted “see attached illustration” for consistency.

Appendix O System Standard Diagrams. Amended for diagram clarity and to add “Services” to the Department name. Added Diagrams B and C for clarification and demonstration.

Former Appendix N, Section 414.1(6). Deleted language due to the deletion and relocation of Former Appendix N, Section 414.1(8).

Former Appendix N, Section 414.1(8). Deleted and relocated language to Section 200.6(3). All systems may be required to get approval from the appropriate permitting agency if it is determined a system is to be installed in a wetland.

Appendix P(2)(c)(ii). Added language for further clarification regarding design and installation of low-pressure pipe distribution.

Appendix P System Standard Diagrams. Amended for diagram clarity and to add “Services” to the Department name.

Former Appendix O(2)(b). Deleted and relocated language to Section 200.6(3). All systems may be required to get approval from the appropriate permitting agency if it is determined a system is to be installed in a wetland.

Appendix Q(1)(b)(ii). Added language to clarify offsets to environmentally sensitive waters.

Appendix Q(1)(b)(v). Added language at the request of stakeholder input to address operation and maintenance concerns.

Appendix Q(1)(d). Added language to further define reporting requirements of installation (i.e. requirements related to submission of as-built plans and notification of construction schedule).

Appendix R(1)(b). Deleted “and shall range in size from one half (1/2) inch to two and one half (2 ½) inches. Fines are prohibited”. Due to increased technology, approved aggregate for this system standard is not limited to just gravel.

Appendix R(1)(c). Added “utilizing tire chips or gravel or a similar type of approved product.” Due to increased technology, approved aggregate for this system standard is not limited to just gravel.

Appendix R(1)(e). Deleted “A minimum one (1) percent fall (12 inches per 100 feet) shall be utilized” to increase systems versatility to address varying site conditions.

Appendix R(1)(o). Added “inspection port” for clarification.

Appendix R System Standard Diagrams. Amended for diagram clarity and to add “Services” to the Department name.

Appendix S. Added Appendix S to represent Nonwater-Carried Sewage Treatment Systems for areas that would not qualify for a traditional onsite wastewater system.

Appendix T. Added Appendix T to represent Wastewater Combustion Systems for areas that would not qualify for a traditional onsite wastewater system.

Appendix U. Added Appendix U to represent Gray Water Subsurface Reuse Systems to address sites where gray water subsurface reuse is desired.

Section 500 – Long-Term Acceptance Rate Standard for Onsite Wastewater Systems (formerly 500 Appendix Q – Long-Term Acceptance Rate Standard for Onsite Wastewater Systems)

Section 500 (formerly 500 Appendix Q) was renumbered to adjust the codification.

Section 500, chart. Deleted “Sandy” and added “Sand” to align with the grammatical structure of the other soil characteristic descriptions in the table.

Section 500, chart. Added soil texture “Silt.” Silt is one of the soil textures described in the USDA-NRCS Field Book for Describing and Sampling Soils.

Section 501 – Peak Sewage Flow Rate Standard (formerly 501 Appendix R – Peak Sewage Flow Rate Standard)

Section 501 (formerly 501 Appendix R) was renumbered to adjust the codification.

Section 501, chart. Added “for domestic wastewater only, no infectious waste” to the Mortuary row to delineate between which types of waste the onsite wastewater system will treat.

Section 501, chart. Added “Hotel” to the Motel row for clarification.

Section 501, chart. Added “Dwelling” to the Residential row and deleted the examples for residential to align with the new dwelling definition. The definition encompasses multiple residential structures for which an onsite wastewater system would be required.

Section 501, chart. Added a row for “Residential Out-Building” to accommodate the current demand for these types of systems.

Section 502 – Onsite Wastewater Pump System Standard (formerly 600 Appendix S – Onsite Wastewater Pump System Standard)

Section 502 (formerly 600 Appendix S) was renumbered to adjust the codification.

Section 502.1(3). Deleted “seasonal” for simplification because saturated conditions can occur at any time of the year.

Section 502.1(5). Amended language pertaining to pump tank capacity. Proposing pump tank size be no less than 500 gallons for consistency and to assist in maintaining the minimum pump rate.

Section 502.2(1). Deleted “the Standard for Determining Sewage Flow Rates from Commercial and Recreational Establishments” and added “Section 501, Peak Sewage Flow Rate Standard” for clarity and accuracy.

Section 502.3(2). Amended language pertaining to form 1739. Form 1739 has been replaced by the onsite wastewater permit to construct.

Section 502.4(6). Added language to state that force mains crossing ditches, bodies of water, under driveways, and parking areas must be encased within another pipe to withstand damage for extra protection and safety reasons.

Section 502.6(1). Amended language pertaining to form 1739. Form 1739 has been replaced by the onsite wastewater permit to construct.

Section 503 – Minimum Design Standards for Tank Construction (formerly 700 Appendix T – Minimum Design Standards for Tank Construction)

Section 503 (formerly 700 Appendix T) was renumbered to adjust the codification.

Section 503.1. Deleted “disposal” to align with the revisions that describe septic systems as onsite wastewater systems, not onsite wastewater disposal systems.

Section 503.2(1) and (7). Deleted “disposal” to align with the revisions that describe septic systems as onsite wastewater systems, not onsite wastewater disposal systems.

Section 503.2(2) and (6). Amended to change “make” to “submit a” for clarity.

Section 503.3(17). Amended language to read “risers or manhole covers, as applicable” for clarity.

Section 503.3(20). Amended “local health department” to read “Department” for clarity and accuracy.

Section 504 – Fiberglass Reinforced Plastic Tanks Standard (formerly 800 Appendix U – Fiberglass reinforced plastic tanks)

Section 504 (formerly 800 Appendix U) was renumbered to adjust the codification.

Section 504. Amended to change “assure” to “to ensure” for clarity.

Section 504.1. Amended “herein” to read “within this regulation” for clarity, and deleted second use of word “herein” for clarity.

Section 504.1(7). Amended “are to present” to read as “shall have” for clarity.

Section 504.3(1)(d). Amended to change “Division of Onsite Wastewater Management” to “Department” for consistency and clarity.

Section 505 – Thermoplastic Tanks Standard (formerly 900 Appendix V – Thermoplastic Tanks Standard)

Section 505 (formerly 900 Appendix V) was renumbered to adjust the codification.

Section 505(2). Amended to change “Division of Onsite Wastewater Management” to “Department” for consistency and clarity.

Section 505(3). Added language to require that thermoplastic tank manufacturers renew their product approval every five years for consistency.

Section 600 License to Clean Onsite Wastewater Systems, Self-Contained Toilets, and Other Sewage Holding Systems (i.e., Pumper/Hauler)

Section 600 (including language formerly appearing in R.61-56.1) was added to encompass pumper/hauler licensing.

Section 600.1. Added section from R.61-56.1, as amended for clarification, to incorporate prohibition against cleaning onsite wastewater systems, self-contained toilets, and other sewage holdings systems without a license.

Section 600.2. Added section to incorporate R.61-56.1’s requirements for licenses, applications, and fees related to the cleaning of onsite wastewater systems, self-contained toilets, and other sewage holding systems, amended for clarification and effective administration. This section includes information for how license applications should be submitted, parameters for vehicle inspections, testing requirements, and fees.

Section 600.3. Added section from R.61-56.1 allowing other governmental entities to have requirements that are more stringent than state requirements, as amended for clarification.

Section 600.4. Added section allowing sewer providers using pumping and transporting vehicles for the sole purpose of maintaining their sewer systems to be exempt from the licensing requirements of Section 600 of the regulation.

Section 601 Vehicles, Equipment, and Practices

Section 601 (including language formerly appearing in R.61-56.1) was added to encompass requirements related to vehicles, equipment, and practices for removal and transport of septage and sewage.

Section 601.1. Added section from R.61-56.1 establishing vehicles requirements related to pumping. Updated language to expressly note “hazard to the public health and the environment.” Added reference to “sewage” in addition to septage.

Section 601.2. Added section from R.61-56.1 specifying proper cleaning processes for pumpers, as amended for clarification.

Section 601.3. Added section from R.61-56.1 specifying disposal requirements for the septage material, as amended to add reference to “sewage” in addition to septage.

Section 601.4. Added section from R.61-56.1 establishing supervisory requirements for the licensee, as amended for clarification.

Section 602 Records of Operation

Section 602. Added section in its entirety (including language formerly appearing in R.61-56.1) setting forth the record keeping requirements for the handling and disposal of septage material.

Section 700 Licensing of Installers

Section 700.1 Added section (including language formerly appearing in R.61-56.1 and R.61-56.2, as amended) identifying requirements for licenses, application, and fees associated with the licensure of an installer. This includes the three tiers of licensing and associated fees and eligibility requirements.

Section 701 Continuing Education and Training

Section 701. Added section in its entirety establishing continuing education requirements and provisions for implementation.

Section 702 Practice, Procedure, and Quality Control

Section 702. Added section in its entirety, including relevant language from R.61-56.2, as amended, setting forth operating constraints within each tier of installer licensure and quality control measures from the Department.

Section 703 Bonding and Insurance Requirements: Tier 3 Installers

Sections 703.1, 703.2, and 703.3. Added provisions from R.61-56.2 requiring bonding and insurance for Tier 3 installers.

Section 704 Transition to Tiered Licensure

Section 704. Added section in its entirety defining how current onsite wastewater installers will transition into their appropriate licensing tier on the effective date of the regulatory amendments.

Section 800 Enforcement

Section 800. Added section in its entirety to consolidate in one section all enforcement provisions pertaining to violations of the regulation, violations of permits, and suspension and revocation of Department permits to construct, approvals to operate, and licenses. This section includes enforcement provisions from the

current R.61-56, R.61-56.1, and 61-56.2 with amendments as needed for clarity, comprehensiveness, and effective regulatory oversight.

Section 801 Severability Clause

Section 801. This section added to shift it from its current location in the regulations, for clarity.

R.61-56.1

Repealed R.61-56.1 and combined it, as amended, with R.61-56 to streamline processes.

R.61-56.2

Repealed R.61-56.2 and combined it, as amended, with R.61-56 to streamline processes.

Notice of Public Hearing and Opportunity for Public Comment:

Interested persons may submit comment(s) on the proposed amendments and repeals to David Vaughan of the Bureau of Environmental Health Services; S.C. Department of Health and Environmental Control, 2600 Bull Street, Columbia, S.C. 29201; fax at (803)896-0645; or email at vaughadr@dhec.sc.gov. To be considered, the Department must receive the comment(s) by 5:00 p.m. on September 28, 2020, the close of the comment period.

The S.C. Board of Health and Environmental Control will conduct a public hearing on the proposed amendments and repeals during its November 12, 2020, 10:00 a.m. meeting. Interested persons may make oral and/or submit written comments at the public hearing. Persons making oral comments should limit their statements to five (5) minutes or less. The meeting will take place in the Board Room of the DHEC Building, located at 2600 Bull Street, Columbia, S.C. 29201. Due to admittance procedures, all visitors must enter through the main Bull Street entrance and register at the front desk. The Department will publish a meeting agenda twenty-four (24) hours in advance indicating the order of its scheduled items at: <http://www.scdhec.gov/Agenda>.

The Department publishes a Monthly Regulation Development Update tracking the status of its proposed new regulations, amendments, and repeals and providing links to associated State Register documents at <http://www.scdhec.gov/Agency/RegulationsAndUpdates/RegulationDevelopmentUpdate/>.

Preliminary Fiscal Impact Statement

There is no anticipated additional cost to the Department or state government due to any requirements of this amendment.

Statement of Need and Reasonableness

The following presents an analysis of the factors listed in 1976 Code Sections 1-23-115(C)(1)-(3) and (9)-(11):

DESCRIPTION OF REGULATION: 61-55, Septic Tank Site Evaluation Fees; 61-56, Onsite Wastewater Systems; 61-56.1, License To Construct Or Clean Onsite Sewage Treatment And Self-Contained Toilets; and 61-56.2, Licensing Of Onsite Wastewater Systems Master Contractors

Purpose: The Department proposes amending R.61-56, Onsite Wastewater Systems, to add new system standards, clarify and amend definitions, and clarify and update selected sections. The amendments will modernize the regulation and streamline permitting procedures to address needed updates in administering the Onsite Wastewater program. The Department also proposes amending provisions of R.61-56.1 and R.61-56.2 and merging R.61-56.1 and R.61-56.2 into R.61-56 to improve efficiency and clarity for regulated entities and the public. This will entail repealing R.61-56.1 and R.61-56.2 and simultaneously adding their provisions, as amended, to R.61-56. The proposed amendments include changes to licensing requirements for pumpers and haulers currently under R.61-56.1. The proposed amendments will revise provisions currently contained in R.61-56.2 to implement a tiered licensing program to establish improved competency of onsite wastewater system contractors/installers. This approach includes new requirements for examination and continuing education. In addition, because R.61-56.1 and R.61-56.2 are being combined with R.61-56, previously separate enforcement provisions will also be consolidated and updated for clarity and to improve administration of the Onsite Wastewater program. In the interest of efficiency, the Department also proposes repealing R.61-55 and adding its provisions to R.61-56. The proposed amendments related to R.61-55 include amendments to definitions and other changes as necessary to facilitate merging this regulation into R.61-56. The Department also proposes other corrections for clarity and readability, grammar, punctuation, codification, and regulation text improvement.

Legal Authority: 1976 Code Section(s) 44-1-140(11), 44-1-150, 44-55-825, 44-55-827, and 48-1-10 et seq.

Plan for Implementation: Upon taking legal effect, Department personnel will take appropriate steps to inform the regulated community of the new amendments and repeals and any associated information. The DHEC Regulation Development Update (accessible at <http://www.scdhec.gov/Agency/RegulationsAndUpdates/RegulationDevelopmentUpdate/>) provides a summary of and link to these proposed amendments and repeals. Additionally, printed copies are available for a fee from the Department's Freedom of Information Office.

DETERMINATION OF NEED AND REASONABLENESS OF THE PROPOSED REGULATION BASED ON ALL FACTORS HEREIN AND EXPECTED BENEFITS:

The proposed amendments and repeals are needed and reasonable, as they will provide clarification regarding the requirements and standards contained in R.61-56 and consistency with the latest scientific, industrial, and technological changes in onsite wastewater system design, construction, and installation. Furthermore, the proposed amendments will simplify the licensure of those operators that clean or pump sewage treatment and disposal systems and, for organization and clarity, provide a tiered structure for the licensure of operators that construct or install these systems. The proposed amendments will also serve to modernize the regulation and streamline permitting procedures to improve overall effectiveness of the Department's administration of the regulation.

DETERMINATION OF COSTS AND BENEFITS:

Internal Costs: Implementation of these amendments will not require additional resources. There is no anticipated additional cost to the Department or state government due to any inherent requirements of these revisions.

External Costs: The proposed revisions do not increase any fees charged by the Department under the current regulations. The proposed revisions would expand existing site evaluation options and allow more streamlined permit processing by allowing an applicant to submit a proposed system layout from a licensed Professional Soil Classifier ("PSC"). Under the proposal, applicants desiring to install systems for a subdivision would be required to submit third-party soils work from a PSC. The PSC would then have the option to either submit a proposed system layout under one of the system standards established within R.61-

56 or give the soils report to a Registered Professional Engineer to design a specialized septic system through the 610 Standard. Subdivision permit applicants may incur additional costs for the third-party work performed by a PSC under this process. Outside of the subdivision context, applicants for conventional systems will retain the option to use a PSC or allow the Department to conduct a soil evaluation and prepare a system layout. The expanded options and enhanced involvement of third-party PSCs will serve to streamline and expedite the permit process for the Department and the regulated community.

Benefits: These amendments upgrade overall quality and practicality, improve clarity and consistency, reflect changes in design, construction, and installation of onsite wastewater system nomenclature and technology, separate the licensing of pumper/haulers and installers, provide for tiered licensure, streamline permitting, clarify existing definitions, and add new definitions and standards for site and system requirements.

UNCERTAINTIES OF ESTIMATES:

None.

EFFECT ON THE ENVIRONMENT AND PUBLIC HEALTH:

There is no anticipated negative environmental or public health effect resulting from the proposed amendments and repeals of these regulations. Positive benefits include fostering increased installer competency through new continuing education requirements and the tiered system of licensure according to system complexity. The additions also enable the Department to focus efforts on ensuring installations are performed in accordance with the issued permit while allowing additional input in the soil evaluation and system layout stages from professionally certified persons.

DETRIMENTAL EFFECT ON THE ENVIRONMENT AND PUBLIC HEALTH IF THE REGULATION IS NOT IMPLEMENTED:

The negative effect on the environment and public health if the proposed amendment of this regulation is not implemented would be less efficiency and clarity for industry and reduced effectiveness and efficiency in the Department's oversight of the disposal of seepage and sewage.

Statement of Rationale:

Here below is the Statement of Rationale pursuant to S.C. Code Section 1-23-110(A)(3)(h):

The Department proposes amending R.61-56, Onsite Wastewater Systems, to add new system standards, clarify and amend definitions, and clarify and update selected sections. The amendments will modernize the regulation and streamline permitting procedures to address needed updates in administering the Onsite Wastewater program. The Department also proposes amending provisions of R.61-56.1 and R.61-56.2 and merging R.61-56.1 and R.61-56.2 into R.61-56 to improve efficiency and clarity for regulated entities and the public. This will entail repealing R.61-56.1 and R.61-56.2 and simultaneously adding their provisions, as amended, to R.61-56. The proposed amendments include changes to licensing requirements for pumpers and haulers currently under R.61-56.1. The proposed amendments will revise provisions currently contained in R.61-56.2 to implement a tiered licensing program to establish improved competency of onsite wastewater system contractors/installers. This approach includes new requirements for examination and continuing education. In addition, because R.61-56.1 and R.61-56.2 are being combined with R.61-56, previously separate enforcement provisions will also be consolidated and updated for clarity and to improve administration of the Onsite Wastewater program. In the interest of efficiency, the Department also proposes repealing R.61-55 and adding its provisions to R.61-56. The proposed amendments related to

R.61-55 include amendments to definitions and other changes as necessary to facilitate merging this regulation into R.61-56. The Department also proposes other corrections for clarity and readability, grammar, punctuation, codification, and regulation text improvement.

Text:

~~Indicates Matter Stricken~~

Indicates New Matter

~~61-55. Septic Tank Site Evaluation Fees.~~

SECTION I. PURPOSE

~~A major factor influencing the health of individuals where public sewer is not available is the proper treatment and disposal of human excreta and other domestic wastes. To this end and to protect the environment from contamination by untreated sewage, the Department of Health and Environmental Control has established and maintained a conscientious program of designing individual sewage treatment and disposal systems, evaluating sites for suitability for individual sewage treatment and disposal systems and approving the installations of such systems. This direct service program is conducted primarily by public health professionals working in county health departments. Funding for the program comes from state appropriations and the fees authorized by this regulation.~~

SECTION II. DEFINITIONS

~~The following definitions shall apply in the interpretation and enforcement of this regulation.~~

~~A. DEPARTMENT—The South Carolina Department of Health and Environmental Control.~~

~~B. HEALTH AUTHORITY—An authorized representative of the South Carolina Department of Health and Environmental Control.~~

~~C. INDIVIDUAL SEWAGE TREATMENT AND DISPOSAL SYSTEM—A system designed for the treatment and disposal of sewage by a septic tank and soil absorption trench. The term also includes alternatives to septic tanks and soil absorption trenches when such alternatives are approved by the Health Authority under the provisions of R.61-56, *Individual Sewage Treatment and Disposal Systems*.~~

~~D. PERMIT—A written statement issued by the Health Authority permitting the construction of an individual sewage treatment and disposal system under the provisions of R.61-56, *Individual Sewage Treatment and Disposal Systems*.~~

SECTION III. FEES

~~—The Department shall charge a fee of \$150.00 to evaluate the site of a proposed individual sewage treatment and disposal system. This fee shall be paid prior to the evaluation of any site for which an application for a permit has been made.~~

SECTION IV. OTHER

A. DESIGNATION OF USE

~~Funds derived from these fees shall be used only for the provision of services and accompanying expenses associated with Environmental Health programs.~~

~~B. UNCONSTITUTIONALITY CLAUSE~~

~~Should any chapter, paragraph, sentence, clause, or phrase of this regulation be declared unconstitutional or invalid for any reason, the remainder of this regulation shall not be affected thereby. [Repealed].~~

61-56. Onsite Wastewater Systems.

Statutory Authority: ~~1976~~ S.C. Code Sections 44-1-140(11), 44-1-150, 44-55-825, 44-55-827, and 48-1-10 et seq.

TABLE OF CONTENTS:

100.	Purposes and Scope.
101.	Definitions and References.
<u>102.</u>	<u>Onsite Wastewater System Site Evaluation and Fees.</u>
102-General	<u>103. Onsite Wastewater Systems.</u>
103-Application, Permit, Approval	<u>104. Application, Permit, Final Inspection, and Approval.</u>
200.	Minimum Site Conditions for Onsite Wastewater Systems.
201.	Minimum Requirements for <u>Onsite Wastewater System</u> Primary Treatment.
202.	Minimum Requirements for <u>Onsite Wastewater System</u> Final Treatment and Disposal Systems.
203.	<u>Onsite Wastewater System</u> Construction Criteria.
204.	Evaluation of Alternative Infiltration Trench Products.
300.	Wastewater Treatment Facility Accessibility.
301.	Discharge of Waste.
302-Enforcement Provisions	
303-Repeal and Date of Effect	
304 302.	Changes in Use that <u>That</u> Impact Existing Onsite Wastewater Systems.
305-Severability Clause	
400.	Appendices of Standards for <u>Onsite Wastewater-Permitted</u> Systems.
	<u>Appendix A - System Standard 100/101 – Conventional with 14-Inch Aggregate Depth.</u>
401 Appendix-A <u>B</u>	- System Standard 150 - Large (greater than 1500 gpd) and Community Systems.
402 Appendix-B <u>C</u>	- System Standard 210/211 - Shallow Placement With <u>with</u> 9-Inch Aggregate Depth.
403 Appendix-C <u>D</u>	- System Standard 220/221 - Shallow Placement With <u>with</u> 6-Inch Aggregate Depth.
404 Appendix-D <u>E</u>	- System Standard 230/231 - Shallow Placement With <u>with</u> 14-Inch Aggregate <u>Depth</u> <u>With</u> <u>with</u> Fill Cap.
405 Appendix-E <u>F</u>	- System Standard 240/241 - Ultra-Shallow Placement With <u>with</u> 6-Inch Aggregate Depth With <u>with</u> Fill Cap.
406 Appendix-F <u>G</u>	- System Standard 250/251 - Reservoir Infiltration System For <u>for</u> Soils With <u>with</u> Expansive Clay.
407 Appendix-G <u>H</u>	- System Standard 260/261 - 9-Inch Shallow Placement System With <u>with</u> Fill Cap System.
408 Appendix-H <u>I</u>	- System Standard 270/271 - Alternative Trench Width and Depth Systems.
409 Appendix-I <u>J</u>	- System Standard 280/281 - Reservoir Infiltration System For <u>for</u> Soils With <u>with</u> Expansive Clay Shallow Rock Formations.
	<u>Appendix K - System Standard 290/291 – Alternative Trench Width and Depth Systems with Fill Cap.</u>
410 Appendix-J <u>L</u>	- System Standard 370/371 - Shallow Placement With <u>with</u> Fill Cap for Sites With <u>with</u> Shallow Class IV Soil.

~~411 Appendix—K M~~ - System Standard 380/381 - Double Aggregate Depth Wastewater Infiltration Trenches.
~~412 Appendix—L N~~ - System Standard 420/421 - Mounded Infiltration System.
~~413 Appendix—M O~~ - System Standard 431 - Mounded Fill System.
~~414 Appendix—N P~~ - System Standard 601 - Elevated Infiltration System.
~~415 Appendix—O Q~~ - System Standard 610 - Specialized Onsite Wastewater System Designs (~~Less Than less than 1500 gpd GPD~~).
~~416 Appendix—P R~~ - Curtain Drain Standard.
Appendix S - Nonwater-Carried Sewage Treatment Systems.
Appendix T - Wastewater Combustion Systems.
Appendix U – Gray Water Subsurface Reuse Systems.
~~500. Appendix Q~~ - Long-Term Acceptance Rate Standard ~~For~~ for Onsite Wastewater Systems.
~~501. Appendix R~~ - Peak Sewage Flow Rate Standard.
~~600. Appendix S~~ 502. - Onsite Wastewater Pump System Standard.
~~700. Appendix T~~ 503. - Minimum Design Standards ~~For~~ for Tank Construction.
~~800. Appendix U~~ 504. - Fiberglass Reinforced Plastic Tanks Standard.
~~900. Appendix V~~ 505. - Thermoplastic Tanks Standard.
600. License to Clean Onsite Wastewater Systems, Self-Contained Toilets, and Other Sewage Holding Systems (i.e., Licensing of Pumper/Haulers).
601. Vehicles, Equipment, and Practices.
602. Records of Operation.
700. License to Construct or Repair Onsite Wastewater Systems (i.e., Licensing of Installers).
701. Continuing Education and Training.
702. Practice, Procedure, and Quality Control.
703. Bonding and Insurance Requirements: Tier 3 Installers.
704. Transition to Tiered Licensure.
800. Enforcement.
801. Severability Clause.

~~100 PURPOSES and SCOPE~~ **100. Purposes and Scope.**

(1) A major factor influencing the health of individuals where public wastewater treatment facilities are not available is the proper onsite treatment and disposal of domestic wastewater. –Diseases such as dysentery, cholera, infectious hepatitis, typhoid, and paratyphoid are transmitted through the fecal contamination of food, water, and the land surface largely due to the improper treatment and disposal of domestic wastewater.- For this reason, every effort should be made to prevent such hazards and to treat and dispose of all ~~human~~ domestic wastewater through the practical application of the ~~best and most cost effective~~ effective technology available.

(2) Safe treatment and disposal of domestic wastewater is necessary to protect the health of families and communities, and to prevent the occurrence of public health nuisances. Domestic wastewater can be rendered ecologically safe and public health can be protected if such wastes are disposed of so that:

~~A.~~(a) They will not contaminate any drinking water supply.

~~B.~~(b) They will not give rise to a public health hazard by being accessible to insects, rodents, or other possible carriers, which may come into contact with food or drinking water.

~~C.~~(c) They will not give rise to a public health hazard by being accessible to children or adults.

~~D.(d)~~ They will not violate federal and state laws or regulations governing water pollution or sewage disposal.

~~E.(e)~~ They will not pollute or contaminate any waters of the state.

~~F.(f)~~ They will not give rise to a public health nuisance.

(3) Where the installation of an onsite wastewater system is necessary, the basic principles of design, construction, installation, operation and maintenance shall be followed.

~~101 DEFINITIONS AND REFERENCES~~ **101. Definitions and References.**

~~A. DEFINITIONS:~~ 101.1. Definitions.

~~ACCESSIBILITY~~Accessibility - S.C. Code Sections 44-55-1410 and 5-31-2010 authorizes county and municipal governments to determine if a wastewater treatment facility is accessible to properties. Where annexation or easements to cross adjacent property are required to connect to a wastewater treatment facility, the wastewater treatment facility shall not be considered accessible.

~~ALTERNATIVE SYSTEM~~Alternative System - A system incorporating design modifications of the proposed subsurface wastewater infiltration trench area (drain field) or absorption trench geometry for the purpose of achieving compliance with required setbacks and offset to the zone of saturation and/or restrictive horizons. No such system shall be utilized unless the Department has established a specific standard.

~~ALTERNATIVE INFILTRATION TRENCH PRODUCTS~~Alternative Infiltration Trench Products - Products specifically designed to replace or eliminate the aggregate typically utilized in subsurface infiltration trenches. Such products must be approved for use by the Department and must adhere to required equivalency values established herein.

~~APPLICANT~~Applicant - A property owner, general contractor or agent representing the property owner, or developer who seeks a permit to construct and operate an onsite wastewater system.

Bond - A sum of money set aside (Surety Bond) to insure completion of work under a contract.

~~CAMPGROUND~~Campground - An organized camp in which campsites are provided for use by the general public or certain groups.

~~CANAL~~Canal - An artificial waterway used for navigation, drainage, or irrigation.

Cleaning - The removal and transportation of septage from an onsite wastewater system, self-contained toilet, or other sewage holding system to an approved disposal location.

~~COLOR CHARTS~~Color Charts (Munsell System or equivalent) - Charts bearing various color chips established by a recognized color system which uses three elements—hue, value, and chroma—to make up a specific color notation. The notation is recorded ~~if~~ in the form of hue, value, and chroma (e.g., 10YR 5/6). The three attributes of color are arranged in the system in orderly scales of equal visual steps, which are used to measure and describe color accurately under standard conditions of illumination by comparing soil samples to color chips on various charts.

Construction - The installation, upgrade, or expansion of an onsite wastewater system.

~~CONVENTIONAL SYSTEM~~Conventional System - An onsite wastewater system that utilizes a network of conventional wastewater infiltration trenches installed in the naturally occurring soil for the treatment and disposal of domestic wastewater.

~~CRITICAL AREA~~Critical Area - S. C. Code Section 48-39-10(J) defines critical area as the following: 1) coastal waters; 2) tidelands; 3) beaches; 4) beach/dune systems which are the areas from the mean high-water mark to the setback line as determined in S. C. Code Section 48-39-280.

~~CURTAIN DRAIN~~Curtain Drain - A subsurface interceptor drain that is installed to collect and redirect ~~seasonal~~ groundwater as it flows through the soil profile to an appropriate discharge point.

~~DEPARTMENT~~Department - The South Carolina Department of Health and Environmental Control.

~~DITCH~~Ditch - A long narrow excavation; intended for the ~~purposes~~ purpose of drainage and/or irrigation.

~~DOMESTIC WASTEWATER OR SEWAGE~~Domestic Wastewater - The untreated liquid and solid human body waste and the liquids generated by water-using fixtures and appliances, including those associated with food service operations. For the purposes of this regulation, domestic wastewater shall not include industrial process wastewater.

Dwelling - A self-contained unit used by one (1) or more households as a home, such as a house, apartment, mobile home, house boat, tiny house, park model RV, RV or camper, or other substantial structure that provides living facilities for one (1) or more persons, including permanent or semi-permanent provisions for living, sleeping, eating, cooking, and sanitation.

~~EFFLUENT~~Effluent - The liquid discharged from a septic tank, effluent pump station, or other sewage treatment device.

~~EMBANKMENT~~Embankment - A bank of soil with at least two (2) feet of vertical height from top to bottom.

~~ENVIRONMENTALLY SENSITIVE WATERS~~Environmentally Sensitive Waters - Outstanding resource waters (ORW), Shellfish Harvesting Waters (SFH), and Trout-Natural Waters (TN) as defined in R.61-68 and classified in R.61-69, and including lakes greater than forty (40) acres in size and the Atlantic Ocean, regardless of their classifications in R.61-69.

~~EXISTING SYSTEM~~Existing System - An onsite wastewater system, which has received final construction approval or has been serving a legally occupied ~~residence~~ dwelling or structure.

~~EXPANSIVE SOILS~~Expansive Soils - Soils containing significant amounts of expansible-layer clay minerals (smectites) as evidenced in the field by classifications of “Very Sticky,” “Very Plastic” and where “Slickensides” are present when evaluated in accordance with the Field Book. Such soil horizons are considered to be restrictive for onsite wastewater systems.

~~FAILING ONSITE WASTEWATER SYSTEM~~Failing Onsite Wastewater System - An onsite wastewater system that is discharging effluent in an improper manner or has ceased to function properly.

~~FIBERGLASS REINFORCED PLASTIC~~Fiberglass Reinforced Plastic - A fibrous glass and plastic mixture that exhibits a high strength to weight ratio and is highly resistant to corrosion.

~~FIELD BOOK FOR DESCRIBING AND SAMPLING SOILS~~Field Book for Describing and Sampling Soils (Field Book) - A field guide published by the U.S. Department of Agriculture (USDA) Natural Resources Conservation Service (NRCS) for making or reading soil descriptions and for sampling soils, as presently practiced in the USA.

~~FINAL TREATMENT AND DISPOSAL~~Final Treatment and Disposal - Ultimate disposition of the effluent from a septic tank or other treatment device into the soil.

~~FLEXURAL MODULUS OF ELASTICITY~~Flexural Modulus of Elasticity - A measure of stiffness of a material.

~~FLEXURAL STRENGTH~~Flexural Strength - A measure of the ability of a material to withstand rupture when subjected to bend loading.

~~GEL COATING~~Gel Coating - A specially formulated polyester resin, which is pigmented and contains filler materials, the purpose of which is to provide a smooth, pore-free, watertight surface for fiberglass reinforced plastic parts.

Gleying - Bluish, greenish, or grayish colors in the soil profile that are indicative of markedly reduced conditions due to prolonged saturation. This condition can occur in both mottled and unmottled soils, and can be determined by using the gley page of the soil color charts.

Gray Water - Domestic wastewater that is generated by water-using fixtures and appliances such as sinks (excluding kitchen sinks), showers, and laundry but that does not come into direct contact with human excreta or solid organic matter.

Gray Water Subsurface Reuse Systems - A system designed to separately collect and treat gray water and subsequently dispose of gray water by reusing it as part of a subsurface irrigation system. This definition does not include any system designed to reuse gray water for any purpose, or by any means, other than subsurface irrigation. This definition also does not include any system that reuses or recirculates gray water within the confines of (i.e., via the plumbing within) a dwelling unit, building, business, or other structure.

~~GREASE TRAP~~Grease Trap - A device designed to separate and store the oil and grease component of wastewater discharged from facilities that prepare food.

~~GLEYPING~~— Bluish, greenish, or grayish colors in the soil profile that are indicative of markedly reduced conditions due to prolonged saturation. This condition can occur in both mottled and unmottled soils, and can be determined by using the Gley page of the soil color charts.

~~INDUSTRIAL PROCESS WASTEWATER~~Industrial Process Wastewater - Non-domestic wastewater generated in a commercial or industrial operation that may or may not be combined with domestic wastewater.

License - The official document issued by the Department authorizing a person to be responsible for the construction, repair, or cleaning of onsite wastewater systems, self-contained toilets, and other sewage holding systems.

Licensed Onsite Wastewater System Installer (Installer) - A person authorized under this regulation to construct or repair onsite wastewater systems. The specific scope of activities authorized depends on the installer's tier of licensure, as follows:

(1) Tier 1 - May install all gravity-fed residential onsite wastewater systems. This level is not authorized to conduct repairs on existing onsite wastewater systems.

(2) Tier 2 - May install all Tier 1 systems plus pumps, grease traps, systems with curtain drains, elevated infiltration systems, mounded systems, and all commercial onsite wastewater systems, large onsite wastewater systems, and community onsite wastewater systems. This level is also authorized to conduct repairs on existing onsite wastewater systems.

(3) Tier 3 - May install all Tier 1 and 2 systems plus all Standard 610 - Specialized Onsite Wastewater Systems. This level is also authorized to conduct repairs on existing onsite wastewater systems.

~~LONG TERM ACCEPTANCE RATE~~Long-Term Acceptance Rate (LTAR) - The long-term rate, typically expressed in gallons per day (gpd) per square foot of trench bottom area, at which a mature onsite wastewater system can continue to accept effluent without hydraulic failure occurring. This flow rate is a result of the interaction between unsaturated soil hydraulic conductivity and biomat resistance.

~~MOTTILING~~Mottling - Morphological features of the soil revealed as spots or blotches of different color or shades of color interspersed with the dominant matrix color.

~~NSF STANDARD~~NSF Standard #14 - A National Sanitation Foundation Standard relating to thermoplastics; which have been tested and found satisfactory for potable water supply uses, ~~and for drains,~~ waste, and vent applications.

Nonwater-Carried Sewage Treatment System - A self-contained system for waste treatment (such as a biological, composting, or incinerating toilet) that stores, treats, and renders human urine and feces inert without the use of water and that is designed to not discharge into the soil, onto the soil surface, into bodies of water, or other external media.

~~ONSITE WASTEWATER SYSTEM~~Onsite Wastewater (OSWW) System - A system, generally consisting of a collection sewer, septic tank(s), and subsurface wastewater infiltration area, designed to treat and dispose of domestic wastewater through a combination of natural processes that ultimately result in effluent being transmitted through the soil, renovated, and ultimately discharged to groundwater. An onsite wastewater system shall also include an onsite wastewater system, as described above, for the treatment and disposal of gray water.

(1) Small Onsite Wastewater System - An individual system serving an individually deeded ~~residence~~ dwelling or business that generates less than fifteen hundred (1500) ~~gallons per day~~ gpd of domestic wastewater. Management and maintenance of each system is the responsibility of the individual property owner.

(2) Large Onsite Wastewater System (General) - An individual system that treats and disposes of domestic wastewater discharges in excess of fifteen hundred (1500) ~~gallons per day~~ gpd.

(a) Privately Owned Large System - A large onsite wastewater collection and treatment system that serves one (1) piece of deeded property such as a school, adult residential care facility, rental apartment complex, shopping center, campground, mobile home park, office complex, etc. Management and maintenance of the system is the responsibility of the individual property owner.

(b) Community (Cluster) System - A wastewater collection and treatment system that provides shared collection, treatment, and disposal of domestic wastewater from multiple parcels or multiple units of individually deeded property. Such a system might serve a small subdivision or a condominium complex.

It is imperative with such systems that some form of common ownership and management be established and approved by the Department.

(c) Commercial Onsite Wastewater System - An onsite wastewater system generating domestic wastewater or sewage that serves a facility, other than a private dwelling, intended for the engagement of commerce.

~~OPERATION AND MAINTENANCE~~Operation and Maintenance - Activities including tests, measurements, adjustments, replacements, and repairs that are intended to maintain all functional units of the onsite wastewater system in a manner that will allow the system to function as designed.

Other Sewage Holding System - Components of a sewer system or holding tank not related to an onsite wastewater system, including grease traps.

~~PARENT MATERIAL~~Parent Material - The unconsolidated and chemically weathered mineral or organic matter from which the column of soils is developed by pedogenic processes.

~~PERCHED ZONE OF SATURATION~~Perched Zone of Saturation (Episaturation) - ~~A soil horizon that is a perched water table soil horizon that is intermittently saturated with water above a soil horizon that is not saturated with water.~~ A zone of saturation above an unsaturated zone.

PERMITPermit - A written document or documents issued by the Department authorizing the construction and operation of an onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system under this regulation. The term “permit” includes the permit to construct and the approval to operate, both of which are required prior to operation of a system under this regulation. Upon installation of a permitted system and Department issuance of an approval to operate, the construction and operation permit survives-remains in effect for the life of the onsite wastewater system that it authorizes.

~~PLASTICITY~~Plasticity - The degree to which “puddled” or reworked soil can be permanently deformed without rupturing. The evaluation is made in accordance with the Field Book by forming a roll (wire) of soil at a water content where the maximum plasticity is expressed.

~~PRIMARY TREATMENT~~Primary Treatment - The initial process to separate solids from the liquid, digest organic matter, and store digested solids through a period of detention and biological conditioning of liquid waste.

~~PROFESSIONAL SOIL CLASSIFIER~~Professional Soil Classifier (“PSC”) - A person with special knowledge of the physical, chemical, and biological sciences applicable to soils as natural bodies and of the methods and principles of soil classification as acquired by soils education and soil classification experience in the formation, morphology, description, and mapping of soils; is qualified to practice soil classifying; and who has been duly registered by the South Carolina State Board of Registration for professional soil classifiers.

~~PUBLIC ENTITY~~Public Entity - Any organizations such as a city, town county, municipality, or special purpose sewer district.

~~PUBLIC WATER SYSTEM~~Public Water System - Any publicly or privately owned waterworks system that provides drinking water for human consumption; as defined in R.61-58, State Primary Drinking Water Regulations.

~~PUMP CHAMBER~~Pump Chamber - A watertight, covered receptacle designed and constructed to receive and store the discharge from a septic tank until such time that the effluent is pumped to a final treatment and disposal site.

Pumping and Transporting Vehicle - A vehicle approved by the Department for the cleaning of onsite wastewater systems, self-contained toilets, and other sewage holding systems and the transporting of septage and sewage to an approved disposal site.

~~RECEPTOR~~Receptor - Any water well or surface water of the state, including estuaries.

~~REDOX DEPLETIONS~~Redox Depletions - Morphological features that are formed by the processes of reduction and translocation of iron and manganese oxides in ~~seasonally~~ saturated soils. These features may be revealed as spots, blotches, or streaks and are lighter shades of color compared with the dominant matrix color.

~~REDOXIMORPHIC FEATURES~~Redoximorphic Features - Morphological features that are formed by the processes of reduction, translocation, and oxidation of iron and manganese oxides in ~~seasonally~~ saturated soils. These include redox concentrations, redox depletions, and reduced matrices.

~~REMOTE SUBSURFACE WASTEWATER INFILTRATION AREA~~Remote Subsurface Wastewater Infiltration Area - A subsurface wastewater infiltration area that is not situated within the legal boundaries of the primary lot or tract that it serves.

~~REPAIR~~Repair - Any work performed on an existing onsite wastewater system for the purposes of correcting a surface system failure, malfunction, or other unauthorized discharge, enhancing system performance, ~~relocating or relocation or replacement of~~ the entire system or system components, provided there are no changes in use that would impact the existing system.

~~REPAIR OR REPLACEMENT AREA~~Repair or Replacement Area - ~~An area reserved for the installation of additional wastewater infiltration trenches.~~ An area identified on the permit to construct reserved for the installation of additional wastewater infiltration trenches.

~~RESTRICTIVE HORIZON~~Restrictive Horizon - A soil horizon that is capable of severely retarding the movement of groundwater or effluent; and may be brittle and cemented with iron, aluminum, silica, organic matter, or other compounds. Restrictive horizons may occur as fragipans, iron pans, organic pans, or shallow rock formations; and are recognized by their resistance in excavation and auger boring.

~~RESIN~~Resin - Any number of commercially available polyester products used in the manufacture of fiberglass reinforced products which serve to contribute mechanical strength, determine chemical and thermal performance, and prevent abrasion of fibers, and which must be physically and/or chemically determined to be acceptable for the environment, and free from inert filler materials.

Revocation - The permanent withdrawal of rights and privileges granted by a license or an onsite wastewater system permit or approval, as applicable.

Rippable Rock - The rippability of rock material is a measure of its ability to be excavated with conventional excavation equipment (e.g., rubber-tired backhoe or mini excavator).

~~SAPROLITE~~Saprolite - Soft, friable, thoroughly decomposed rock that has formed in place by chemical weathering, retaining the fabric and structure of the parent rock, and being devoid of expansive clay.

Unconsolidated saprolite can be dug using a hand auger or knife. Consolidated saprolite cannot be penetrated with a hand auger or similar tool, and must be dug with a backhoe or other powered equipment.

~~SEALANT~~Sealant - A bonding agent specifically designed to bond joining sections of fiberglass reinforced plastic products to each other in such a manner ~~so as to~~ create a durable long lasting, watertight seal, which does not alter the structural integrity or strength of the two (2) joined fiberglass products.

Self-Contained Toilet - A single or multiple-unit toilet and holding tank combination.

Septage - The mixture of solids and liquids removed during cleaning of a septic tank, grease trap, any other part of an onsite wastewater system, self-contained toilet, or other sewage holding system which receives domestic sewage; this includes the liquid, solid, and semi-solid materials which settle to the bottom of transport containers.

~~SEPTIC TANK~~Septic Tank - A watertight, covered receptacle designed and constructed to receive the discharge of domestic wastewater from a building sewer, separate solids from the liquid, digest organic matter, store digested solids through a period of detention and biological conditioning of liquid waste, and allow the effluent to discharge for final treatment and disposal.

~~SERIAL DISTRIBUTION~~Serial Distribution - A method for effluent distribution on sloping terrain that utilizes drop boxes or earthen dams to affect total sequential flow from upper to lower wastewater infiltration trenches.

Sewage - Any liquid waste containing human, animal, vegetable, or chemical matter in suspension or solution from water closets, urinals, lavatories, bathtubs, laundry tubs or devices, floor drains, drinking fountains, or other water-using fixtures.

Site - The area or plot of land identified by a plat, deed, or other legal document specifying lot size and its boundaries that is submitted for evaluation by an applicant in an onsite wastewater system permit application.

~~SITE EVALUATION~~Site Evaluation - Evaluation of the soil, geology, zone of saturation, surface waters, topography, structures, and property lines of the proposed location of the onsite wastewater system. The evaluation can be conducted directly by certified Department personnel or the Department may conduct an evaluation through the review of information submitted by a Professional Soil Classifier licensed in ~~the State of~~ South Carolina.

Soils Report - A report prepared by a Professional Soil Classifier describing soil and site conditions for the purpose of designing an onsite wastewater system.

~~SOIL STRUCTURE~~Soil Structure - The aggregation of primary soil particles (i.e., sand, silt, and clay) into compound particles, or clusters of primary particles, which are separated from the adjoining aggregates by surfaces of weakness. In soils with platy structure, the aggregates are plate-like and overlap one another to severely impair permeability. A massive condition can occur in soils containing considerable amounts of clay when a portion of the colloidal material, including clay particles, tends to fill the pore spaces making the soil very dense.

~~SOIL TEXTURE~~Soil Texture - The relative proportions of the three soil separates (sand, silt, and clay) in a given sample of soil. The percentages of each separate are used to determine which class a particular sample falls into by plotting the intersection of these three values on the ~~United States~~ U.S. Department of Agriculture (USDA) Natural Resource Conservation Service (~~USDA~~ NRCS) Textural Triangle.

~~SPECIALIZED ONSITE WASTEWATER SYSTEM DESIGN~~Standard 610 - Specialized Onsite Wastewater System Design (less than 1500 ~~GPD~~ gpd) - An onsite wastewater system that is certified to function satisfactorily and in accordance with all requirements of ~~R-61-56 this regulation~~ by virtue of it having been designed by a Registered Professional Engineer (PE) licensed in ~~the State of~~ South Carolina with technical input from a Professional Soil Classifier licensed in ~~the State of~~ South Carolina. Such systems have limited application, and can only be utilized when the required engineering design, certification, and technical soils documentation have been provided to and accepted by the Department.

~~STANDARD~~Standard - A group of requirements developed by the Department that specifies the minimum site conditions and design criteria necessary for the approval of a specific type of onsite wastewater system, ~~(i.e., alternative system) that differs from a conventional system.~~ A standard may also address minimum design criteria for certain components of onsite wastewater systems as well as methodologies for determining system sizing.

~~STICKINESS~~Stickiness - The capacity of soil to adhere to other objects. Stickiness is estimated in accordance with the Field Book at the moisture content that displays the greatest adherence when pressed between the thumb and forefinger.

Subdivision - means all divisions of a tract or parcel of land into two (2) or more lots, building sites, or other divisions, for the purpose, whether immediate or future, of sale or building development, and includes all division of land involving a new street or a change in existing streets, and includes resubdivision. This definition shall apply whether the lots are to be sold, rented, or leased. This definition shall not apply when the division or partition of the land, or the conveyance of property is pursuant to a will, an intestacy statute, or an order by a probate judge.

~~SUBSURFACE WASTEWATER INFILTRATION AREA (DRAIN FIELD)~~Subsurface Wastewater Infiltration Area (Drain Field) - A specific area where a network of wastewater infiltration trenches or other devices of sewage application are installed to provide the final treatment and disposal of effluent.

Suspension - The temporary or indefinite withdrawal or cessation of rights and privileges granted by a license or onsite wastewater system permit or approval, as applicable.

Third-Party - A qualified person or entity, as determined by the Department, that is independent of the parties involved.

~~ULTIMATE TENSILE STRENGTH~~Ultimate Tensile Strength - A measure of the resistance of a material to longitudinal stress, measured by the minimum longitudinal stress required to rupture the material.

~~UPGRADE/EXPANSION~~Upgrade/Expansion - Any work performed on an existing onsite wastewater system for the purposes of increasing the capacity of the system above its original design and/or accommodating wastes of a different character than was originally approved.

Wastewater Characteristics - The physical, chemical, and biological parameters and characteristics of domestic wastewater. Physical characteristics include turbidity, color, odor, total suspended solids (TSS), temperature and fats, oils and grease (FOG). Chemical characteristics include the presence and extent of chemical oxygen demand (COD), total organic carbon (TOC), Total Kjeldahl Nitrogen (TKN), nitrogen, phosphorous, chlorides, sulfates, alkalinity, pH, heavy metals, trace elements, and priority pollutants identified by the U.S. Environmental Protection Agency (EPA). Biological characteristics include biological oxygen demand (BOD), oxygen required for nitrification and microbial population. High

strength wastewater is characterized as meeting one (1) or more of the following levels: BOD > 350 mg/l, TSS > 100 mg/l, TKN > 100 mg/l, FOG > 30 mg/l.

Wastewater Combustion System - A self-contained system for wastewater treatment that uses water as a medium for transport and storage. It treats and renders wastewater inert using maceration and incineration.

~~WASTEWATER INFILTRATION TRENCH~~Wastewater Infiltration Trench - A trench installed in the naturally occurring soil that is utilized for the treatment and disposal of domestic wastewater. ~~A conventional trench is characterized by the following: (a) at least twenty three (23) inches in depth; (b) thirty six (36) inches in width; (c) filled with aggregate so that at least six (6) inches is beneath the distribution pipe, with at least five (5) inches on both sides of the pipe, and at least three (3) inches covering the pipe; and (d) at least nine (9) inches of backfill. Other trench configurations are specified in the attached Appendices of Standards for Onsite Wastewater Systems.~~

~~WASTEWATER TREATMENT FACILITY~~Wastewater Treatment Facility - An accessible publicly or privately owned system of structures, equipment, and related appurtenances ~~to~~ that treat, store, or manage wastewater.

~~ZONE OF SATURATION~~Zone of Saturation - Any zone in the soil profile that has soil water pressures that are zero or positive at some ~~times~~ time during the year. For the purpose of this regulation, the beginning of such a zone shall be utilized in determining all required vertical separations from the deepest point of effluent application. This zone, ~~therefore~~, shall be defined as the shallowest of those points at which either redox depletions of value four (4) or more and chroma two (2) or less appear or gleying is first observed; or, in the absence of other field identification methods, the maximum groundwater elevation as determined by wet season monitoring performed in accordance with criteria approved by the Department.

B. REFERENCES101.2. References.

~~(1) The following statutes referenced in this Regulation are those in force on the effective date of this Regulation:~~

- ~~—— (a) 1976 S.C. Code of Laws, Section 44-1-140(11), South Carolina Department of Health and Environmental Control (1976 Code as amended)~~
- ~~—— (b) 1976 S.C. Code of Laws, Section 1-23-10 et seq., South Carolina Administrative Procedures Act (1976 Code as amended)~~
- ~~—— (c) 1976 S.C. Code of Laws, Section 48-1-10 et seq., South Carolina Pollution Control Act (1976 S.C. Code as amended)~~
- ~~—— (d) 1976 S.C. Code of Laws, Section 48-39-10 et seq., South Carolina Coastal Tidelands and Wetlands (1976 S.C. Code as amended)~~
- ~~—— (e) Section 208, Federal Clean Water Act, 33 U.S.C. Section 1288~~
- ~~—— (f) 1976 S.C. Code of Laws, Section 48-39-280 et seq., South Carolina Coastal Tidelands and Wetlands (1976 Code as amended)~~
- ~~—— (g) 1976 S.C. Code of Laws, Section 44-55-1410 et seq., Water and Sewer Facilities in Counties (1976 S.C. Code as amended)~~
- ~~—— (h) 1976 S.C. Code of Laws, Section 5-31-2010 et seq., Additional Powers of Municipalities as to Sewage Collection and Disposal (1976 S.C. Code as amended)~~

~~(2) The following Departmental Regulations referenced in this Regulation are those in force on the effective date of this Regulation:~~

- ~~—— (a) Regulation 61-25, Retail Food Establishments~~

- ~~— (b) Regulation 30-1, Coastal Division Regulations~~
- ~~— (c) Regulation 61-9, Water Pollution Control Permits~~
- ~~— (d) Regulation 61-58, State Primary Drinking Water Regulations~~
- ~~— (e) Regulation 61-67, Standards for Wastewater Facility Construction~~
- ~~— (f) Regulation 61-68, Water Classification and Standards~~
- ~~— (g) Regulation 61-69, Classified Waters~~

~~— (3) The following manufacturing and procedural standards referenced in this Regulation regulation are those in force on the effective date of this Regulation revision:~~

- ~~— (a1) American Society of Agronomy (ASA)~~
- ~~— (b2) American Society for Testing and Materials (ASTM) C~~
- ~~— (c3) American Society for Testing and Materials (ASTM) D~~
- ~~— (d4) Canadian Standard Association (CSA)~~
- ~~— (e5) Crop Science Society of America (CSSA)~~
- ~~— (f6) International Association of Plumbing and Mechanical Officials (IAPMO)~~
- ~~— (g7) National Building Specification (NBS) Voluntary Product Standard PS 15-69~~
- ~~— (h8) National Electrical Manufacturers Association (NEMA)~~
- ~~— (i9) Soil Science Society of America (SSSA)~~

102. Onsite Wastewater System Site Evaluation and Fees.

102.1. Site Evaluations.

(1) An applicant for a permit to construct an onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system shall, at the time an application for a permit to construct is submitted to the Department, pay to the Department the site evaluation fee set forth in Section 102.2.

(2) Soil evaluations shall be conducted only by a licensed Professional Soil Classifier or a certified Department staff member.

(3) Except as provided in Section 102.1(4) and 102.1(5), an onsite wastewater system layout in accordance with Section 400, Appendices of Standards for Permitted Systems, may be prepared by:

- (a) A certified Department staff member;
- (b) A Registered Professional Engineer licensed in South Carolina; or
- (c) The same licensed Professional Soil Classifier who conducted the soil evaluation for the site.

(4) Only a Registered Professional Engineer may design a system and prepare a system layout for Standard 610/611 – Specialized Onsite Wastewater Systems, Standard 150 – Large and Community Onsite Wastewater Systems, nonwater-carried sewage treatment systems, wastewater combustion systems, and gray water subsurface reuse systems.

(5) The Department will not perform a soil evaluation or prepare a system layout for any subdivision or portion of a subdivision. Soil evaluations for any lots that are part of a subdivision must be conducted by a Professional Soil Classifier. Proposed system layouts for any lots that are part of a subdivision must be prepared by a third-party Registered Professional Engineer or Professional Soil Classifier meeting the criteria under Section 102.1(3)(c). The Soils Report and proposed system layout must be submitted with

the onsite wastewater system permit application for the purpose of the Department review and issuance of a permit to construct.

102.2. Fees.

The Department shall charge a fee of one hundred and fifty dollars (\$150.00) to evaluate the site of a proposed onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system.

102.3. Other.

Funds derived from these fees shall be used only for the provision of services and accompanying expenses associated with the Department's Bureau of Environmental Health Services programs.

102. General**103. Onsite Wastewater Systems.**

103.1. General.

~~102.1(1)~~ Each dwelling-unit, building, business, or other structure occupied for more than two (2) hours per day shall be provided with an approved method for the treatment and disposal of domestic wastewater.

~~102.2(2)~~ It shall be the responsibility of the property owner to ensure that a permit to construct and operate any new, upgraded, or expanded onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system is obtained from the Department prior to construction and operation of the system.

~~102.3(3)~~ No person shall begin construction of a ~~building-dwelling, business, or other structure~~ to be served by an onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system until a permit to construct and operate such a system is issued by the Department. –Mobile or modular structures intended for occupancy shall not be moved onto the site until the permit to construct and operate an onsite wastewater system has been issued.

~~102.4(4)~~ The ~~permit holder-property owner~~ shall be required to properly operate and maintain in good working order all onsite wastewater system(s) and their parts, and operate as efficiently as possible, all facilities and systems which are installed pursuant to the permit and to comply with all terms and conditions of ~~the~~ a previously issued permit. System parts may include, but are not limited to, sealed watertight tanks, lid(s), piping, aggregate, pump, and pump components.

~~102.5(5)~~ An onsite wastewater system serving more than one (1) piece of deeded property shall be considered as a community or cluster collection and treatment system and shall comply with the following:

~~(1)-(a)~~ A permit activity will not occur that is inconsistent with a plan or plan amendment approved under section 208(b) of the Clean Water Act unless the Department finds such variance necessary to protect the public's health, safety, and welfare.

~~(2)-(b)~~ A If a public entity ~~shall-owns~~ the system ~~and, the entity~~ shall be responsible for the operation, maintenance, and replacement of all components unless otherwise approved by the Department. The Department may consider a request from a private entity or person; however, such proposals must be evaluated on a case-by-case basis. The Department will evaluate the capability of long-term, reliable system operation in its evaluation of a permit request.

~~(3)-(c)~~ If the project is owned by a private entity or person, the Department shall require financial assurances for the operation, maintenance, and replacement of the tank(s) and subsurface wastewater infiltration area system and relevant collection/pumping components.

~~(4)-(d)~~ Sufficient area meeting the minimum requirements for large onsite wastewater systems shall be provided for at least one hundred (100) percent repair or replacement of the primary subsurface wastewater infiltration area.

~~(5)-(e)~~ The collection sewer and pumping portions of a community onsite wastewater system shall receive a separate Construction Permit under ~~R. 61-67.300~~ R.61-67.300, Standards for Wastewater Facility Construction.

~~102.6~~ When the actual or estimated peak sewage flow will exceed fifteen hundred (1500) gallons per day, the Department may require that the design of the onsite wastewater system be prepared by a Registered Professional Engineer licensed in the State of South Carolina. A Registered Professional Engineer licensed in the State of South Carolina may also design all onsite wastewater systems where the sewage flow will be less than fifteen hundred (1500) gallons per day. These designs shall include the Soils Report conducted by certified Department personnel or submitted by a Professional Soil Classifier licensed in the State of South Carolina and shall satisfy requirements of Regulation 61-56, Section 415, Appendix O—System Standard 610—Specialized Onsite System Designs.

~~102.7~~ 103.2. Large (greater than 1500_gpd) and community onsite wastewater systems incorporating advanced treatment methods, including but not limited to aerobic pre-treatment, lagoons, surface or subsurface drip irrigation, low pressure pipe distribution and other maintenance intensive methods, shall be required to obtain a Land Application Permit under ~~R. 61-9.505~~ R.61-9, Water Pollution Control Permits.

~~102.8~~ 103.3. Facilities that generate industrial process or any other non-domestic wastewater shall not be granted a permit under this regulation unless the Department determines that the proposed discharge would not pose a significant environmental risk.- In such a determination, the ~~Bureau of Water Department~~ would assess the risk to public health and/or groundwater contamination determine if the waste may cause a violation of any drinking water standard under R.61-58, State Primary Drinking Water Regulations, or may otherwise adversely affect the health of persons regardless of whether or not the wastewater ~~were~~ is to be discharged continuously or intermittently to the onsite wastewater system.- Plumbing appurtenances that facilitate the transport of such wastewater, including floor drains, trench drains, utility sinks, equipment drains, or any other conduit shall not be installed in facilities served by onsite wastewater systems unless specifically approved by the Department as a result of the above-described determination.

~~102.9~~ 103.4. Campgrounds.

(1) Onsite wastewater systems serving campgrounds shall comply with all applicable requirements of this regulation. -Such campgrounds shall be provided with adequate toilet and bathing facilities, except in those cases where all campsites are furnished with individual sewer service connections, and each site is exclusively designated for use by camping units equipped to access such connections.

(2) Individual sewer service connections shall be part of an approved sewage collection system and shall be equipped with removable, tight fitting covers.

(3) Where individual sewer service connections are not furnished at all campsites, an approved sanitary dump station(s) shall be provided at a convenient location(s) within the campground at the ratio of one (1) dump station per one hundred (100) ~~unsewered~~ campsites or fractions thereof.

(a) A dump station shall consist of one (1) or more trapped four (4) inch sewer risers surrounded by a concrete apron having a diameter of at least two (2) feet and sloped to drain. -Sewer risers must be equipped with removable, tight fitting covers.

(b) Each dump station shall be equipped with pressurized water to be used for washing the concrete apron. -The water outlet shall be protected from back siphonage by a vacuum breaker installed at its highest point, or by other approved means. -A sign shall be placed at this water outlet stating: -THIS WATER IS FOR CLEANING PURPOSES ONLY.

~~103. APPLICATION, PERMIT, APPROVAL~~ **104. Application, Permit, Final Inspection, and Approval.**

~~103.1~~ **104.1. Application.**

(1) The applicant shall furnish, ~~on the application form provided in a format as identified by the Department, correct~~ complete and accurate information necessary for determining the feasibility of an onsite wastewater system.

(2) The application shall include written permission from the property owner or their legal representative, using a form identified by the Department, for Department representatives to access the property.

(3) A boundary plat, deed, or other legal document specifying the lot size and its boundaries shall be furnished by the applicant. The applicant shall provide a legal description that specifies lot boundary lengths for lots two (2) acres or smaller in size and upon request for any lot greater than two (2) acres in size. -When a dwelling or facility is to be served by a remote subsurface wastewater infiltration area, the applicant must provide appropriate easement(s). -An appropriate easement must allow ingress and egress for construction, operation, maintenance, replacement and repair and must run with the land.

(4) Soil boring descriptions, backhoe pits, and soils classifications from specifically identified locations, including other tests or information, shall be required when deemed necessary by the Department.

(5) Backhoe pits shall be required above the Fall Line that separates the Piedmont area from the Coastal Plain as defined by the South Carolina Geological Survey.

(6) Before a site evaluation of the lot is performed by the Department, the applicant ~~may~~ shall be required to: -clear and mark pertinent property boundary lines and corners; post an identification marker in the front center of the lot; place stakes at the corners of the proposed building; mark the proposed point of stub-out and septic tank as well as proposed drain field area; locate the proposed or existing well location; and identify the proposed location of any additional structures or facilities on the property that may influence the placement and configuration of the onsite wastewater system. A site sketch shall be included on the application or as a separate attachment that reflects the items above and any other items specified on the application. ~~Also, the~~ The applicant may be required to clear underbrush from the property in order to facilitate the evaluation.

(7) The Department will not issue a permit if it determines that site conditions are unsuitable for the system layout or permit requested, or if issuance of the permit would otherwise be inconsistent with the requirements of this regulation. The Department also reserves the right to modify a proposed system layout submitted by a Professional Soil Classifier under Section 102.1(3)(c) when deemed appropriate.

~~103.2~~ **104.2. Permit.**

(1) It shall be unlawful to construct, upgrade, expand, or operate an onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system unless the Department has issued a permit to construct and approval to operate for the specific construction and operation proposed. The system shall be constructed and operated in accordance with the permit, and the Department must authorize any changes prior to the construction and operation of the system. ~~The applicant shall be required to make a written request or submit a new application if the~~ for any desired permit modifications require another site evaluation. The applicant shall submit a new application with a new site evaluation fee for permit modifications that require an additional site evaluation. The Department may also require a permit to construct and approval to operate for the repair, relocation, or replacement of an onsite wastewater system or its components when deemed necessary, irrespective of whether any change in use impacting the existing onsite wastewater system would occur. The property owner or their legal representative shall notify the Department before relocating or replacing an onsite wastewater system or its components so that the Department may determine whether a permit will be required.

(2) ~~The onsite wastewater permitted~~ system shall be constructed and operated according to the specifications and conditions of the permit, and in compliance with this regulation.

~~(3) In the case of repairs to existing onsite wastewater systems, the Department may authorize the best possible method of repair that, in the opinion of Department staff, may improve the operation of the system, regardless of site conditions.~~

~~(4)~~(3) Permits issued after the effective date of this regulation shall remain valid for a period of five (5) years from the date of issuance, provided the physical character of the property has not changed and the conditions of the original permit can be met. ~~Exceptions may be granted for those permits addressed by other statutes.~~

~~103.3 Approval~~

~~—(1) Any repair, extension or alteration for which a permit has been issued and all newly constructed onsite wastewater systems may be inspected in accordance with S.C. Code Section 44-55-825.—~~

~~—(2) The licensed system contractor shall also sign a statement that the onsite wastewater system was installed as specified in the Department issued permit.~~

104.3. Final Inspections and Approval.

(1) Except in the case of systems designed by a Registered Professional Engineer, all installers shall arrange with the Department in advance a time for a final inspection of an onsite wastewater system that is being installed. It shall be considered a violation of this regulation to cover a system that has not been subject to final Department inspection or installer self-inspection in accordance with this regulation.

(2) Final inspections of onsite wastewater systems to determine compliance with a Department-issued permit to construct shall be conducted by certified Department staff except as follows:

(a) Registered Professional Engineers licensed in South Carolina must conduct final inspections on all systems they design.

(b) Except as provided in 104.3(2)(a), Tier 3 installers may self-inspect systems they install. Tier 3 installers shall comply with Section 702.2 in its entirety.

(c) Except as provided in Section 104.3(2)(a), the Department may, in its discretion, direct Tier 1 and Tier 2 installers with no pending enforcement actions or prior Department findings of violation under Section 800 of this regulation to self-inspect systems they have installed using a process and form directed by the Department. Tier 1 and Tier 2 installers allowed to conduct self-inspections shall comply with Section 702.2 in its entirety. The Department reserves the right to withdraw any direction to Tier 1 and Tier 2 installers to conduct self-inspections at any time.

(3) Documentation of system installations, including certified as-built plans where required, shall be submitted in a Department-approved format within two (2) business days of completing the system installation or within two (2) business days of the installer self-inspection, where applicable.

(4) The licensed system installer shall also sign a statement certifying that the onsite wastewater system was installed as specified in the Department issued permit.

(5) Following final inspection and upon review of all required documentation, the Department will issue an approval to operate for a system installed in compliance with the issued permit to construct and all applicable requirements of this regulation. The Department will not issue an approval to operate if it determines that the system installation is inconsistent with the issued permit to construct or inconsistent with any requirement of this regulation.

200. MINIMUM SITE CONDITIONS**200. Minimum Site Conditions for Onsite Wastewater Systems.**

200.1. Soil texture, depth of soil to restrictive horizons, and depth to the zone of saturation shall meet minimum standards approved by the Department. These characteristics shall be determined using accepted methodologies in the field of soil science.

200.2. Soils exhibiting massive or platy structure, and soils which have been identified as having substantial amounts of expansible layer clay minerals or smectites, are unsuitable for onsite wastewater systems.

200.3. Where the estimated peak sewage flow will not exceed fifteen hundred (1500) gpd, the minimum vertical separation between the deepest point of effluent application and the zone of saturation shall be at least six (6) inches.

200.4. Where the estimated peak sewage flow will exceed fifteen hundred (1500) gpd, the depth to the zone of saturation shall be at least thirty-six (36) inches below the naturally occurring soil surface, and at least six (6) inches below the deepest point of effluent application.

200.5. Depth to rock and other restrictive horizons shall be greater than twelve (12) inches below the deepest point of effluent application.

200.6. Setbacks.

(1) The area of the lot or plot of ground where the onsite wastewater system is to be installed shall be of sufficient size so that no part of the system, excluding solid pipes, will be:

- ~~(4)~~ (a) Within five (5) linear feet of a building, or under a driveway or parking area;

~~(2)~~ (b) Within seventy-five (75) linear feet of a private well ~~(less than 1500 gpd sewage flow)~~, one hundred (100) linear feet of a receptor ~~(greater than 1500 gpd sewage flow)~~, and within the Department's established minimum distance from a public well;

~~(3)~~ (c) ~~With in~~Within one hundred (100) linear feet of a public well;

~~(4)~~ (d) Within seventy-five (75) linear feet of the delineated critical area line (tidal waters of coastal waters and tidelands critical areas) as determined by the Department's coastal division; or within seventy-five (75) linear feet of the mean high water (within the banks) elevation ~~(non-tidal nontidal)~~ waters, beach/dune systems and beach -critical areas) of an impounded or natural body of water, including streams, ~~and canals, and retention ponds;~~

~~(5)~~ (e) Within ten (10) feet of upslope and twenty-five (25) feet of down-slope curtain drains;

~~(6)~~ (f) Within twenty-five (25) feet of a drainage ditch or stormwater treatment system including any detention ponds (determined by maximum water elevation);

(g) Within fifteen (15) feet of piped drainage ditches;

(h) Within fifteen (15) feet of an inground pool;

(i) Within twenty-five (25) feet upslope of a basement or within fifteen (15) feet of the sides of a basement. These setbacks do not apply to a septic tank/pump chamber location or where trench installations are downslope of a basement;

~~(7)~~ (j) Within fifteen (15) feet of the top of the slope of embankments or cuts of two (2) feet or more vertical height when any part of the wastewater infiltration trench is to be placed higher in elevation than the invert of the cut or embankment;

~~(8)~~ (k) Within five (5) feet of a property line.

~~(9)~~ (2) Greater protective offsets shall be required when utilizing certain ~~alternative~~ system standards contained within this ~~Regulation~~ regulation.

(3) Prior to permitting the onsite wastewater system, jurisdictional determination of any affected wetlands may be required. Should any part of the proposed onsite wastewater system be located in wetlands, approval from the appropriate permitting agency(s) (e.g., U.S. Army Corps of Engineers, SCDHEC Ocean and Coastal Resource Management, etc.) shall be received, and proof of such provided to the Department.

200.7. In addition to the minimum space required in Section 200.6, minimum repair area shall be set aside as follows:

(1) Any new site meeting the minimum design criteria for an onsite wastewater system shall have a usable repair or replacement area equivalent to at least fifty (50) percent of the size of the original system. Where community onsite wastewater systems are utilized, there must be at least one hundred (100) percent repair or replacement area. ~~This area cannot be covered with structures or impervious materials.~~

(2) Usable repair or replacement area shall be demonstrated to include suitable soil conditions, and shall be free of impervious materials, buildings, or other improvements, setbacks, easements, and other encroachments that would prevent system construction.— The undisturbed area between the wastewater infiltration trenches shall not be credited towards this requirement.

200.8. Multiple, individually owned remote subsurface wastewater infiltration areas may be considered for mass installation in a defined area where the wastewater infiltration trenches will be adjacently located to each other, provided that the combined peak wastewater loading is less than fifteen hundred (1500) gpd. -In such cases, each subsurface wastewater infiltration area plot shall be sized such that there is sufficient area for one hundred (100) percent subsurface wastewater infiltration area replacement. -Each plot shall be deeded, with all appropriate easements, as a lot in conjunction with the specific unit that it serves, and required protective offsets, as described in Section 200.6, shall apply to each individual remote subsurface wastewater infiltration area. -A plan shall be prepared by a Registered Professional Engineer licensed in ~~the State of South Carolina~~ that illustrates the overall plan; specifies the route and identification of effluent sewers and/or force mains; specifies the entity responsible for perpetual maintenance of the sewer lines and mass subsurface wastewater infiltration area; specifies the configuration and identification of the individual subsurface wastewater infiltration area parcels; and specifies the manner in which ingress and egress will be provided to the individual subsurface wastewater infiltration area parcels. When the combined peak wastewater loading of the adjacently loading subsurface wastewater infiltration area will exceed fifteen hundred (1500) gpd, the project shall be considered as a public (community) collection and treatment system, ~~then and~~ the onsite wastewater system must comply with the requirements in Section ~~402.5~~ 103.1(5).

~~201. MINIMUM REQUIREMENTS FOR PRIMARY TREATMENT~~ **201. Minimum Requirements for Onsite Wastewater System Primary Treatment.**

201.1. Septic Tanks.

(1) All persons or firms manufacturing septic tanks for use in South Carolina shall submit detailed plans for each size tank to the Department; and shall receive written approval for such tanks prior to their installation in the state.

(2) The design and construction of each septic tank shall be in accordance with minimum standards contained within this ~~Regulation~~ regulation.

(3) No septic tank shall be installed which has a net liquid capacity of less than one thousand (1000) gallons. -Such tanks shall be sufficient to serve dwellings of four (4) bedrooms or less. -Two hundred fifty (250) gallons additional capacity shall be required for each bedroom over four (4).

(4) When multiple dwellings, ~~including condominiums, apartments, and mobile homes,~~ share a common onsite wastewater system, each dwelling unit shall either have its own properly sized septic tank; or it must discharge to a larger tank(s) that provides the combined total of the minimum septic tank capacities required for each contributing unit. -Exception may be granted when a public entity, or private entity with financial assurances, is approved by the Department to provide operation and maintenance of the system. -In such cases, the formula in Section 201.1(5) may be considered.

(5) Septic tanks serving establishments other than individual dwellings shall be sized according to actual peak flow data, when available, or by estimates of peak sewage flow, as set forth in standards established by the Department. For those septic tanks receiving peak flows less than fifteen hundred (1500) gpd, the net liquid capacity shall be calculated by multiplying 1.5 times the peak flow expressed in ~~gallons per day~~ (gpd). -For those septic tanks receiving peak flows between fifteen hundred (1500) and forty-five hundred (4500) gpd, the net liquid capacity shall be calculated as follows:

$$\text{Volume (V)} = 1125 \text{ gal. plus } (0.75 \times \text{Peak Flow(gpd)}).$$

For those septic tanks receiving peak flows in excess of forty-five hundred (4500) gpd, the net liquid capacity shall be at least equal to the peak flow:

$$\text{Volume (V)} = \text{Peak Flow (gpd)}$$

(6) The minimum liquid capacity requirements shall be met by the use of a single septic tank or two (2) or more tanks installed in series. -Septic tanks joined in series shall be interconnected by an upper effluent pipe(s) with a minimum diameter of four (4) inches and a lower sludge pipe(s) with a minimum diameter of twelve (12) inches. -The upper connection(s) shall be installed level from tank to tank, and the lower sludge pipe connection(s) shall be installed level and shall be placed twelve (12) inches above the bottoms of the tanks. -The lower sludge pipe connection(s) can be eliminated if the first tank in series contains at least two-thirds ($\frac{2}{3}$) of the total required liquid capacity. There shall be no more than two (2) inches of fall from the inlet invert of the first tank to the outlet invert of the last tank in series.

201.2. Grease Traps.

(1) Any new food service facilities permitted under ~~R. 61-25~~ R.61-25, Retail Food Establishments, and served by an onsite wastewater system that is permitted after the effective date of this regulation shall be required to have a properly sized grease trap. -This requirement ~~shall~~ may also apply to new facilities not requiring a food service permit under ~~R. 61-25~~ R.61-25, ~~where cooking operations are performed.~~ Exception may be granted in cases where a permitted retail food service establishment performs limited food preparation and/or cooking. ~~is permitted but does not perform any cooking or food preparation operations.~~

(2) ~~Existing food service establishments permitted under R. 61-25 prior to the effective date of this regulation shall not be required to immediately comply with this section, provided the facility does not experience an onsite wastewater system malfunction. Those existing establishments that experience a future malfunction as a result of problems associated with the accumulation of grease shall be required to comply with all portions of this section. Also, food service facilities that were permitted prior to the effective date of this regulation, were closed, and then reopened at any time thereafter, provided the facility was not experiencing a malfunction prior to closure and the original peak design flow will not be exceeded, shall not be required to immediately comply with this section provided the facility does not experience an onsite wastewater system malfunction. Any existing food service establishment that does not have a grease trap, but experiences an onsite wastewater malfunction as a result of grease accumulation, shall be required to immediately comply with all portions of Section 201 as if it were a new food service facility.~~

(3) Any food service facility requiring a grease trap shall provide two (2) separate plumbing stub-outs, one serving the food preparation area and the other serving the restrooms. -The stub-out from the restrooms shall discharge directly into the main building septic tank. -The stub-out from the food preparation area shall discharge directly into the grease trap with the effluent then directed to the main building septic tank. In order to enhance grease separation while the liquids are hot, the grease trap shall be placed as close as possible to the source of wastewater. -Garbage grinders shall not be allowed to discharge to such systems.

(4) All grease traps must be directly accessible from the surface; and must be equipped with an extended outlet sanitary tee terminating six (6) to twelve (12) inches above the tank bottom. -The minimum access opening shall be eighteen (18) inches in diameter.

(5) All grease traps serving facilities from which the peak sewage flow exceeds fifteen hundred (1500) gpd shall either be dual chambered or individual tanks in series. -If dual chambered, both the dividing wall and the second chamber must be equipped with a sanitary tee terminating six (6) to twelve (12) inches above the tank bottom.

(6) It shall be the responsibility of the owner/manager to ensure that the grease trap(s) is cleaned by a licensed septage pumper at frequent intervals to prevent the carryover of grease into other parts of the onsite wastewater system.

(7) Determination of Minimum Net Liquid Capacity

(a) No grease trap used as part of an onsite wastewater system shall have a net liquid capacity of less than one thousand (1000) gallons. ~~Also, commercial~~ Commercial interior-type grease interceptors shall not be utilized in lieu of a properly sized exterior grease trap.

(b) Minimum net liquid capacities of grease traps shall be determined as follows:

$NLC = GPD \times LF \times RF$, where

NLC = Net Liquid Capacity of Grease Trap (gallons)

GPD = Total Maximum Estimated Sewage Flow (gpd)

LF = Loading Factor (the approximate portion of the total maximum daily flow generated in food preparation areas)

0.3 - Schools and Other Institutions

0.4 - Restaurants

0.5 - Retail Food Stores

RF = Minimum Retention and Storage Factor of 2.5 for Onsite Wastewater Systems

201.3. Other Primary Treatment Methods.

The Department, at its discretion, may consider other methods of primary treatment requested by a Registered Professional Engineer where conditions are warranted.

~~202. MINIMUM REQUIREMENTS FOR FINAL TREATMENT AND DISPOSAL SYSTEMS~~ **202. Minimum Requirements for Onsite Wastewater System Final Treatment and Disposal Systems.**

~~202.1 General~~

(1) All pipe utilized in onsite wastewater systems shall meet applicable ASTM standards. All piping utilized in the connection of a septic tank to a subsurface wastewater infiltration area, including that which is utilized in the connection of adjacent wastewater infiltration trenches, whether they be level or serially fed, shall be non-perforated Schedule 40 PVC pipe. -Such pipe, excluding force mains, shall be a minimum of three (3) inches in diameter. -The connecting pipe shall not be surrounded by aggregate.

(2) At least seven (7) feet of undisturbed earth shall exist between wastewater infiltration trenches.

(3) The aggregate used in onsite wastewater systems shall be a material approved by the Department, and shall range in size from one-half (1/2) inch to two and one-half (2 1/2) inches. Fines shall be prohibited. Tire chips shall range in size from one-half (1/2) inch to four (4) inches in size, and wire strands shall not protrude more than one-half (1/2) inch from the sides.

(4) Drop boxes shall be utilized when deemed necessary by the Department. When required, they shall be surrounded and stabilized by at least two (2) feet of undisturbed or manually compacted earth, and the wastewater infiltration trenches shall be fed with non-perforated Schedule 40 PVC pipe. The invert of the drop box overflow pipe shall be at the same elevation as the top of the aggregate in the trenches fed by that

box, and the top of the aggregate shall be level throughout the trench run. -Other methods that affect serial distribution shall also overflow at the same elevation as the top of the aggregate.

(5) There shall be at least two (2) feet of earthen buffer between the septic tank and all portions of adjacent wastewater infiltration trenches. -Where gravity flow is utilized, the invert elevation of the septic tank outlet shall be at the same elevation or higher than the top of the aggregate in the highest placed wastewater infiltration trench.

(6) To ensure proper operation and protection of onsite wastewater systems, the Department may require individual or combined installation of drainage swales, curtain or interceptor drains, protective barriers, or protective ground cover. Final approval of the permit may be withheld until such time as these improvements are completed.

(7) The bottom of each wastewater infiltration trench, including the distribution pipe contained within, shall be as level as possible, with an elevation differential not to exceed two (2) inches throughout the trench run.

(8) The required number, length, and configuration of wastewater infiltration trenches shall be determined by the Department, and shall be based upon the Standard for Determining Peak Sewage Flow Rates (~~Appendix R~~) (Section 501, Peak Sewage Flow Rate Standard) from Commercial and Recreational Establishments in conjunction with the Long-Term Acceptance Rate Standard for Onsite Wastewater Systems (~~Appendix Q~~) (Section 500, Long-Term Acceptance Rate Standard for Onsite Wastewater Systems). -All systems shall be sized based upon the most hydraulically limiting, naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

(9) The aggregate over the distribution pipe shall be covered with a strong, untreated pervious material to prevent infiltration of backfill material.

~~203. CONSTRUCTION CRITERIA~~ **203. Onsite Wastewater System Construction Criteria.**

203.1. On sloping terrain, wastewater infiltration trenches shall be installed perpendicular to the direction of slope and parallel to the contours of the land.

203.2. Where deemed necessary by the Department, all required site alterations (swales, fill, shaping, etc.) shall be done prior to permitting the installation of the onsite wastewater system.

203.3. The area in which the onsite wastewater system is to be located shall be protected from surface water and roof or downspout drainage by the installation of drainage swales and small amounts of fill to achieve positive surface drainage.

203.4. Gross amounts of dirt, mud, and debris shall be removed from the septic tank before backfilling. All backfilling around the tank shall be tamped to facilitate stabilization.

203.5. If septic tank lids are of multi-part, slab-type construction, all joints shall be caulked or covered with heavy roofing paper or similar material.

203.6. All septic tanks of two-piece construction joined by tongue and groove shall be sealed with either bituminous mastic or other watertight caulking material placed in the groove in such quantity that the sealant is clearly visible around the entire tank after the two (2) pieces are joined.

203.7. When effluent pumping is required, all components of the pumping system shall adhere to standards contained within this ~~Regulation~~ regulation.

203.8. The Department may restrict, delay, or prohibit the installation or final approval of any onsite wastewater system when adverse soil or site conditions exist. —These may include, but not be limited to, wet soil conditions in textural ~~classes~~ Class III and Class IV as described in the Long-Term Acceptance Rate Standard for Onsite Wastewater Systems approved by the Department.

~~204. EVALUATION OF ALTERNATIVE INFILTRATION TRENCH PRODUCTS~~ **204. Evaluation of Alternative Infiltration Trench Products.**

The Department shall be responsible for the evaluation and approval of alternative infiltration trench products prior to their use in the ~~S~~state, unless otherwise regulated by statute. -This evaluation shall include a review of available research data; a review of parameters relating to structure, geometry, and volume; and the establishment of required equivalency values for comparing the product to a conventional wastewater infiltration trench.

204.1. Application.

(1) All requests for approval of alternative infiltration trench products must be submitted in writing to the Department, and must include the following:

- (a) Complete description of the product and its intended use.
- (b) Complete listing of materials used in the construction of the product, including specifications.
- (c) Copies of all available literature pertaining to the product, and a listing of all appropriate reference materials.
- (d) Copies of any and all available research, testing, and monitoring data, to include records of performance and/or prior experience in actual field conditions.

(2) The Department will review the application, and may seek other information, including additional evaluations.

204.2. Equivalency Value ~~For~~ for Infiltrative Surface.

(1) The total infiltrative surface area surrounding the sides and bottom of a conventional wastewater infiltration trench (i.e., 5.33 sq.ft./lin.ft.) shall serve as the basis for all geometric comparisons to alternative infiltration trench products.

(2) The effective infiltrative surface area of a conventional trench shall include the total of both rectangular sidewalls, beginning at the top of the aggregate and extending to the trench bottom, in addition to the width of the trench bottom. -Similarly, the effective infiltrative surface area of a product shall include the total of both immediately adjacent, rectangular sidewalls, beginning at the top of louvers, slits, holes or similar orifices, in addition to the rectangular width of the trench immediately beneath the product.

(3) The equivalency value (E) for any given product is determined by comparing the total effective surface area of the product, as defined above, with that of a conventional wastewater infiltration trench as follows:

(a) Total Infiltrative Surface Area for One (1) Foot of Conventional Trench:

Trench Sidewalls = $2 \times (1.16\text{ft.H} \div 1.0\text{ft.L}) (1.16\text{ft.H} \times 1.0\text{ft.L}) = 2.33\text{ sq.ft./lin.ft.}$

Trench Bottom = $1 \times (3\text{ft.W} \times 1\text{ft.L}) = 3.0\text{ sq.ft./lin.ft.}$

Total Infiltrative Surface Area = 5.33 sq.ft./lin.ft.

(b) Equivalency Value (E) Shall Be Computed As Follows:

$E = 5.33\text{ sq.ft./ft} \div \text{Sum of Three Rectangular Interfaces Immediately Adjacent to Product (sq.ft./ft.)}$

(c) The Required Total Length of the Product Shall Be Calculated As Follows:

Length of Product (L) = E x Length of Conventional 36 in. Wide Trenches Required ~~By~~by DHEC Regulations and Standards

204.3. Other parameters to be evaluated for alternative infiltration trench products may include the following:

(1) Structural Integrity - Products must be of sound construction and able to adequately withstand the normal pressures and ~~stressed~~stresses associated with installation and use.

(2) Inertness - No product can be approved unless it will remain relatively unaffected for extended periods of time while in contact with typical domestic wastewater.

(3) Storage Volume - The effluent storage capacity of a product must closely approximate or exceed that of a comparable conventional system.

(4) Maintenance of Permeable Interfaces - A product shall have a direct interface with the effective infiltrative surface (undisturbed natural soil) or, if backfill is required, backfill material shall not create a permeability barrier and shall not hinder the downward or horizontal flow of effluent into the undisturbed natural soil.

(5) The unique characteristics of a given product may warrant the evaluation of other parameters not specifically mentioned in this section of the regulation.

(6) The design, construction, or installation methods used with any product shall not conflict nor violate any other requirements established by the Department.

204.4. Approval ~~For~~for General Use.

If warranted, the Department will issue a letter of approval for general use of the alternative infiltration trench product in accordance with equivalency values and other requirements determined herein. At least nine (9) inches of ~~backfill~~soil cover is required ~~unless a lesser amount is approved by the Department.~~

~~300. WASTEWATER TREATMENT FACILITY ACCESSIBILITY~~300. Wastewater Treatment Facility Accessibility.

300.1. Permits for new onsite wastewater systems shall not be issued where a wastewater treatment facility is accessible for connection.

300.2. Repairs to or replacement of failing onsite wastewater systems shall not be allowed where a wastewater treatment facility is accessible for connection.

~~301. DISCHARGE OF WASTE~~**301. Discharge of Waste.**

No septic tank effluent or domestic wastewater or sewage shall be discharged to the surface of the ground or into any stream or body of water in South Carolina without an appropriate permit from the Department.

~~302. ENFORCEMENT PROVISIONS~~

~~—(1) This regulation is issued under the authority of Section 44-1-140(11) of the 1976 Code of Laws, as amended, and Section 48-1-10 et seq. of the 1976 Code of Laws, as amended. It shall be enforced in accordance with interpretations and public health reasons approved by the Department.~~

~~—(2) The Department may temporarily suspend a permit for a violation of this regulation.~~

~~—(3) The Department may revoke a permit for a violation of this regulation. The Department will revoke a permit when:~~

~~—(a) the onsite wastewater system is malfunctioning and sewage is discharging to the ground or the groundwater, the holder of the permit has received notice that the system is malfunctioning, the Department has given notice that repairs must be made within a reasonable period of time, the holder of the permit has not made the repairs, and the system continues to discharge sewage to the ground or the groundwater; or~~

~~—(b) the onsite wastewater system is malfunctioning and sewage is discharging to the ground or the groundwater, the holder of the permit has received notice that the system is malfunctioning, the Department has given notice that a wastewater treatment facility is accessible for connection.~~

~~—(4) Following revocation under R.61-56.302.3.a, the holder of the revoked permit can obtain a repair permit and make the necessary repairs to the system. After the Department approves the repairs pursuant to Section 103.3 of this regulation, the holder of the permit will operate the onsite wastewater system under the terms of the new permit.~~

~~—(5) In addition to the authority to suspend and revoke permits, the Department may seek enforcement and issue civil penalties in accordance with SC Code Ann. Sections 44-1-150 and 48-1-320, 330, and 340. The Department shall have the authority to assess and suspend civil penalties if the violations of this regulation are corrected in a period of time established by the Department.~~

~~—(6) A Department decision involving the issuance, denial, renewal, modification, suspension, or revocation of a permit may be appealed by an affected person with standing pursuant to applicable law, including S.C. Code Title 44, Chapter 1 and Title 1, Chapter 23. Any person to whom an order or enforcement letter is issued may appeal it pursuant to applicable law, including S.C. Code Title 44, Chapter 1 and Title 1, Chapter 23.~~

~~303. REPEAL AND DATE OF EFFECT~~

~~This regulation shall become effective as provided in Section 12310 et seq. of the 1976 Code of Laws of South Carolina, as amended, and shall repeal Department of Health and Environmental Control R. 6156 of the Code of Laws of South Carolina, 1976; except that, Sections 200.6(2) and 200.6(4) shall become effective on January 1, 2009, and existing Sections V.E(b) and (c) shall remain in effect until that date.~~

~~304. CHANGES IN USE THAT IMPACT EXISTING ONSITE WASTEWATER SYSTEMS~~**302. Changes in Use That Impact Existing Onsite Wastewater Systems.**

If the use of a dwelling or facility is changed such that additions or alterations are proposed which increase wastewater flow, change wastewater characteristics, or compromise the integrity or function of the system, the onsite wastewater system shall be brought into full compliance with this regulation. -Alterations that change the wastewater characteristics or increase wastewater flow will require the owner to ~~apply for~~submit an application and receive ~~an approval~~ a permit to construct for the upgrade/expansion prior to any alterations.

~~305. SEVERABILITY CLAUSE~~

~~Should any section, paragraph, sentence, clause or phrase of this regulation be declared unconstitutional or invalid for any reason, the remainder of this regulation shall not be affected thereby.~~

400

~~APPENDICES OF STANDARDS FOR ONSITE WASTEWATER SYSTEMS~~

400. Appendices of Standards for Permitted Systems.

Appendix A – System Standard 100/101 – Conventional with 14-Inch Aggregate Depth

(1) Site/Permitting Requirements

(a) The depth to the zone of saturation (ZOS) must be at least twenty-nine (29) inches below the naturally occurring soil surface and at least six (6) inches below the bottom of the proposed wastewater infiltration trenches at the deepest point of effluent application.

(b) The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches at the deepest point of effluent application.

(c) The long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

(d) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. This area shall have a suitable configuration and shall meet the minimum soil and site conditions of this regulation.

(e) This system must not be used on sloping sites that require serial distribution unless it can be demonstrated that the entire wastewater infiltration trench installation (i.e., side wall to side wall and end to end) can meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons.

(2) Installation Requirements

(a) The wastewater infiltration trench aggregate shall be fourteen (14) inches in depth and shall be placed so as to provide six (6) inches of aggregate below the pipe, five (5) inches beside the pipe, and three (3) inches above the pipe. The aggregate shall be covered with at least nine (9) inches of soil.

(b) The wastewater infiltration trench width shall be thirty-six (36) inches.

(c) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

(d) All tree and brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

(3) Final Landscaping and Drainage

(a) Installation of drainage swales, ditches, curtain drains, and rain gutters may be required to divert or intercept water away from the onsite wastewater system location to a positive outfall. The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.

(b) A barrier to preclude parking and vehicular traffic over the system area may be required.

(c) Following final landscaping, seeding, or sodding may be required to prevent erosion.


(d) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

CONVENTIONAL STANDARD
WITH FOURTEEN (14) INCH AGGREGATE DEPTH

PROGRAM 360/ CODE 100 / CODE 101 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

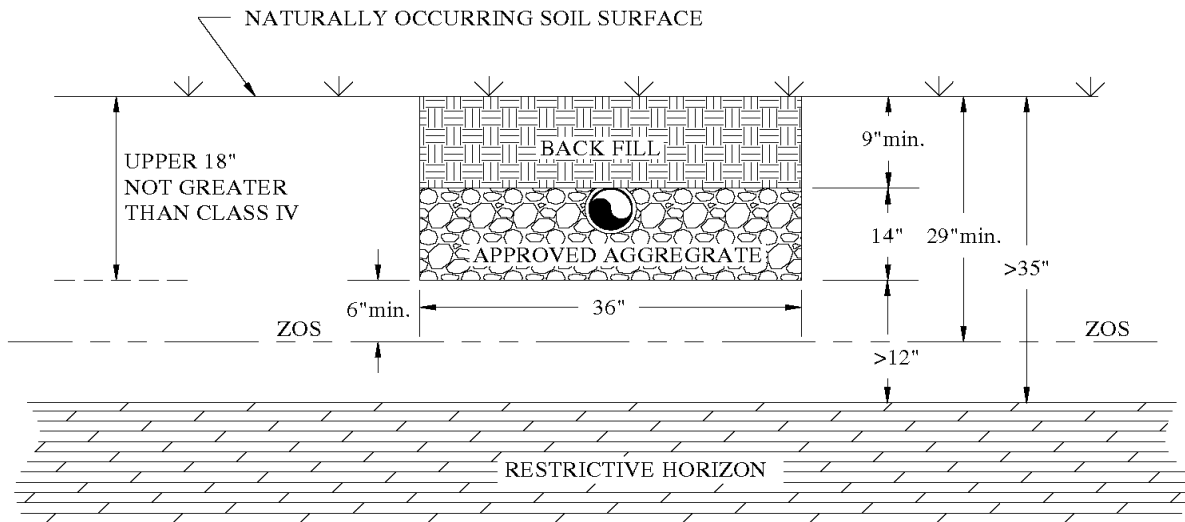

NOT TO SCALE

03/09/2018

~~401. Appendix A – SYSTEM STANDARD 150 – LARGE (greater than 1500 GPD) AND COMMUNITY~~
~~ONSITE WASTEWATER SYSTEMS~~ **Appendix B – System Standard 150 – Large (greater than 1500**
gpd) and Community Systems

~~401.1 SITE/PERMITTING REQUIREMENTS~~

(1) Site/Permitting Requirements

~~_____ (a) The Department may require that designs~~ Designs for large and community onsite wastewater systems shall be prepared by a Registered Professional Engineer licensed in ~~the State of South Carolina.~~ Further, the Department may require whatever engineering and soils based submittals are deemed necessary to determine the feasibility and acceptability of any site for such a system.

~~_____ (b) No part of the system, with the exception of solid pipe, may be located within one hundred (100)~~
linear feet of a receptor.

~~(2) _____ (c) The depth to the zone of saturation (ZOS) shall be at least thirty-six (36) inches below the~~
naturally occurring soil surface; and at least six (6) inches below the deepest point of effluent application.

~~(3) _____ (d) The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom~~
of the proposed wastewater infiltration trenches.

~~(4) _____ (e) The Long Term Acceptance Rate~~ long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting, naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(5) _____ (f) There shall be at least fifty (50) percent reserved subsurface wastewater infiltration area repair~~
or replacement area available consisting of soils suitable for a large onsite wastewater system, except where public (community) systems are utilized, in which case there must be at least one hundred (100) percent repair or replacement area.

~~(6) _____ (g) Large (greater than 1500 gpd) and community onsite wastewater systems incorporating~~
advanced treatment methods, including but not limited to aerobic pre-treatment, lagoons, surface or subsurface drip irrigation, low pressure pipe distribution, and other maintenance intensive methods, shall be required to obtain a Land Application Permit under ~~R. 61-9.505~~ R.61-9.505.

~~(7) _____ (h) Efforts to circumvent the requirements of this standard by configuring remote, individually~~
deeded, adjacently located subsurface wastewater infiltration areas in lieu of a community onsite wastewater system shall not be permitted. -On a very limited basis, a few of these individual systems may be considered for mass installation where the wastewater infiltration trenches will be adjacent to each other in a defined area, provided that the combined peak wastewater loading is less than fifteen hundred (1500) gpd. -In such cases:

~~(a) _____ (i) Each subsurface wastewater infiltration area plot shall be sized such that there is sufficient~~
area for one hundred (100) percent subsurface wastewater infiltration area replacement.

~~(b) _____ (ii) Each plot shall be deeded with all appropriate easements as a lot in conjunction with the~~
specific unit that it serves, and required protective offsets, as described in Section 200.6, shall apply to each individual remote subsurface wastewater infiltration area.

~~(e)~~ (iii) A plan shall be prepared by a Registered Professional Engineer licensed in the State of South Carolina that illustrates the overall plan; specifies the route and identification of effluent sewers and ~~for~~remains ~~force mains~~; specifies the entity responsible for perpetual maintenance of the sewer lines and mass subsurface wastewater infiltration area; specifies the configuration and identification of the individual subsurface wastewater infiltration area parcels; and specifies the manner in which ingress and egress will be provided to the individual subsurface wastewater infiltration area parcels.

~~(d)~~ (iv) When the combined peak wastewater loading of the adjacently located subsurface wastewater infiltration areas from the entire project will exceed fifteen hundred (1500) gpd, the project shall be considered as a public (community) collection and treatment system, and all requirements described in Section ~~402.5~~ 103.1(5) and this standard shall apply.

~~401.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1)~~ (a) Large (greater than 1500 gpd) and community onsite wastewater systems shall not be constructed in fill material; and shall not be placed any closer to receptors than one hundred (100) feet.

~~(2)~~ (b) Conventional wastewater infiltration trenches installed in the naturally occurring soil and having a width of thirty-six (36) inches shall be utilized.

~~(3)~~ (c) Wherever possible, designs that favor long wastewater infiltration trenches, convex landscape positions, and rectangular subsurface wastewater infiltration area configurations shall be required.

~~(4)~~ (d) All tree/brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~401.3 COMMUNITY OR CLUSTER COLLECTION AND TREATMENT ONSITE WASTEWATER SYSTEMS~~ (3) Community or Cluster Collection and Treatment Onsite Wastewater Systems

~~(1)~~ (a) An onsite wastewater system serving more than one (1) piece of deeded property shall be considered as a public (community) collection and treatment system.

~~(2)~~ (b) A permit activity will not occur that is inconsistent with a plan or plan amendment approved under Section 208(b) of the Clean Water Act, unless the Department finds such variance necessary to protect the public's health, safety, and welfare.

~~(3)~~ (c) A public entity shall own the system and shall be responsible for the operation, maintenance, and replacement of all components unless otherwise approved by the Department. -The Department may consider a request from a private entity or person; however, such proposals must be evaluated on a case-by-case basis. -The Department will evaluate the capability of long-term, reliable system operation in its evaluation of a permit request.

~~(4)~~ (d) If the project is owned by a private entity or person, the Department shall require financial assurances for the operation, maintenance, and replacement of the tank(s) and subsurface wastewater infiltration area system and relevant collection/pumping components.

~~(5)~~ (e) ~~Sufficient area meeting the minimum requirements for large onsite wastewater systems shall be provided for at least one hundred (100) percent repair or replacement of the primary subsurface wastewater infiltration area.~~ There shall be an area equivalent to one hundred (100) percent in size of the original primary subsurface wastewater infiltration area held in reserve for system repair or replacement.

This area shall have a suitable configuration and shall meet all minimum requirements for large onsite wastewater systems.

~~(6)~~ (f) The collection sewer and pumping portions of a community onsite wastewater system shall receive a separate Construction Permit under ~~R. 61-67.300~~ R. 61-67.300.

~~(7)~~ (g) The ~~permit holder~~ responsible party(s) on record shall be required to properly operate and maintain in good working order all system(s) parts, and operate as efficiently as possible, all facilities and systems which are installed pursuant to the permit and to comply with all terms and conditions of the permit. System parts include, but are not limited to, sealed watertight tanks, lid(s), piping, aggregate, pump, and pump components.

~~402. Appendix B – System Standard 210/211 – Shallow Placement With 9-Inch Aggregate Depth~~
Appendix C – System Standard 210/211 – Shallow Placement with 9-Inch Aggregate Depth

~~402.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

~~(1)~~ (a) There must not be a zone of saturation (ZOS) within twenty-four (24) inches of the naturally occurring soil surface.

~~(2)~~ (b) The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(3)~~ (c) The texture in the upper eighteen (18) inches of naturally occurring soil may either be Class I, Class II, Class III, or Class IV.

~~(4)~~ (d) The ~~Long-Term Acceptance Rate~~ long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(5)~~ (e) Due to the decreased sidewall absorption area and the increased potential for ground water mounding near the surface, the Equivalency Factors for these systems shall be calculated by conventional wastewater infiltration trenches and increased by an additional factor of 0.09 times.

~~(6)~~ (f) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of ~~R. 61-56~~ this regulation.

~~(7)~~ (g) This system must not be used on sloping sites that require serial distribution unless it can be demonstrated that the entire wastewater infiltration trench installation (i.e., side wall to side wall and end to end) can meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons. ~~Level installations on slightly sloping sites can be considered if the above requirements can be met.~~

~~(8)~~ (h) This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~ gpd.

~~402.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1) Serial distribution is restricted (see item 7. above).~~

~~(2)~~ (a) The wastewater infiltration trench aggregate shall be nine (9) inches in depth and shall be covered with at least nine (9) inches of backfill.

~~(3)~~ (b) The ~~maximum~~ wastewater infiltration trench width shall be thirty-six (36) inches; ~~the minimum width shall be eighteen (18) inches.~~

~~(4)~~ (c) The maximum depth of the bottom of the wastewater infiltration trench shall be eighteen (18) inches below the naturally occurring soil surface unless it can be demonstrated that deeper placement can meet the required textural limitations and the offsets to the zone of saturation and restrictive horizons.

~~(5)~~ (d) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(6)~~ (e) All tree and brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~402.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) Installation of drainage swales, ditches, curtain drains, and rain gutters may be required to divert or intercept water away from the onsite wastewater system location to a positive outfall. -The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.

~~(2)~~ (b) A barrier to preclude parking and vehicular traffic over the system area may be required.

~~(3)~~ (c) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(4)~~ (d) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
SHALLOW PLACEMENT WITH NINE (9) INCH AGGREGATE DEPTH

PROGRAM 362 / CODE 210 / CODE 211 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

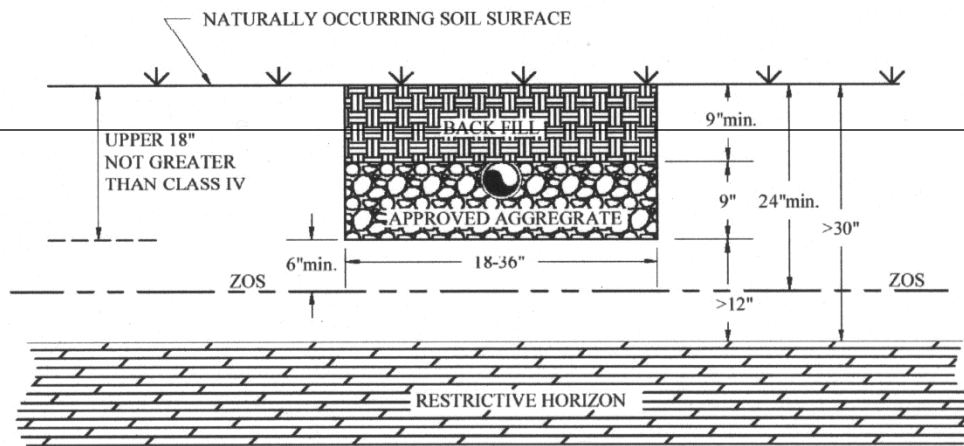

SCALE: 3/4"=1'


TLS REV 03/2007

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE STANDARD
SHALLOW PLACEMENT WITH NINE (9) INCH AGGREGATE DEPTH

PROGRAM 362 / CODE 210 / CODE 211 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

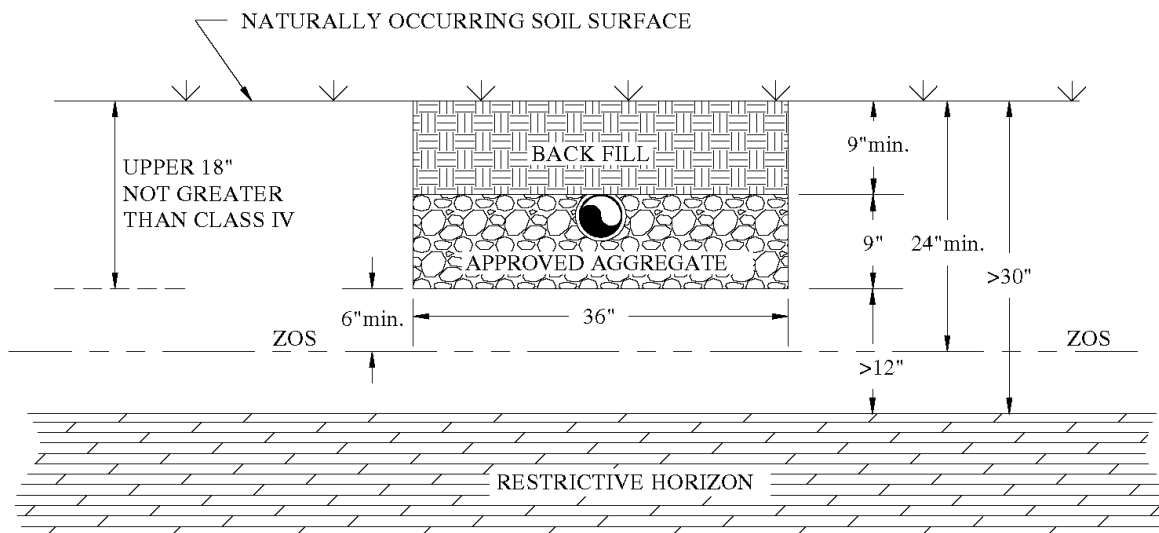

NOT TO SCALE

REV. 03/09/2018

~~403 Appendix C SYSTEM STANDARD 220/221 SHALLOW PLACEMENT WITH 6 INCH AGGREGATE DEPTH~~
Appendix D – System Standard 220/221 – Shallow Placement with Six (6)-Inch Aggregate Depth

~~403.1 SITE/PERMITTING REQUIREMENTS (1) Site/Permitting Requirements~~

~~(1) (a)~~ There must not be a zone of saturation (ZOS) within twenty-one (21) inches of the naturally occurring soil surface.

~~(2) (b)~~ The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(3) (c)~~ The texture in the upper eighteen (18) inches of naturally occurring soil may either be Class I, Class II, Class III, or Class IV.

~~(4) (d)~~ The ~~Long Term Acceptance Rate~~long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(5) (e)~~ Due to the decreased sidewall absorption area and the increased potential for ground water mounding near the surface, the Equivalency Factors for these systems shall be calculated by conventional wastewater infiltration trenches and increased by an additional factor of 0.12 times.

~~(6) (f)~~ There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of ~~R. 61-56~~ this regulation.

~~(7) (g)~~ This system must not be used on sloping sites that require serial distribution unless it can be demonstrated that the entire wastewater infiltration trench installation (i.e., side wall to side wall and end to end) can meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons. ~~Level installations on slightly sloping sites can be considered if the above limitations can be met.~~

~~(8) (h)~~ This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~gpd.

~~403.2 INSTALLATION REQUIREMENTS (2) Installation Requirements~~

~~(1) Serial distribution is restricted (see Section 403.1(7)).~~

~~(2) (a)~~ The wastewater infiltration trench aggregate shall be six (6) inches in depth and shall be covered with at least nine (9) inches of backfill.

~~(3) (b)~~ The ~~maximum~~ wastewater infiltration trench width shall be thirty-six (36) inches; ~~the minimum width shall be eighteen (18) inches.~~

~~(4) (c)~~ The maximum depth of the bottom of the wastewater infiltration trench shall be fifteen (15) inches below the naturally occurring soil surface unless it can be demonstrated that deeper placement can meet the required textural limitations and the offsets to the zone of saturation and restrictive horizons.

~~(5)~~ (d) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(6)~~ (e) All tree and brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~403.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) Installation of drainage swales, ditches, curtain drains, and rain gutters may be required to divert or intercept water away from the onsite wastewater system location to a positive outfall. -The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.

~~(2)~~ (b) A barrier to preclude parking and vehicular traffic over the system area may be required.

~~(3)~~ (c) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(4)~~ (d) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
SHALLOW PLACEMENT WITH SIX (6) INCH AGGREGATE DEPTH

PROGRAM 362 / CODE 220 / CODE 221 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

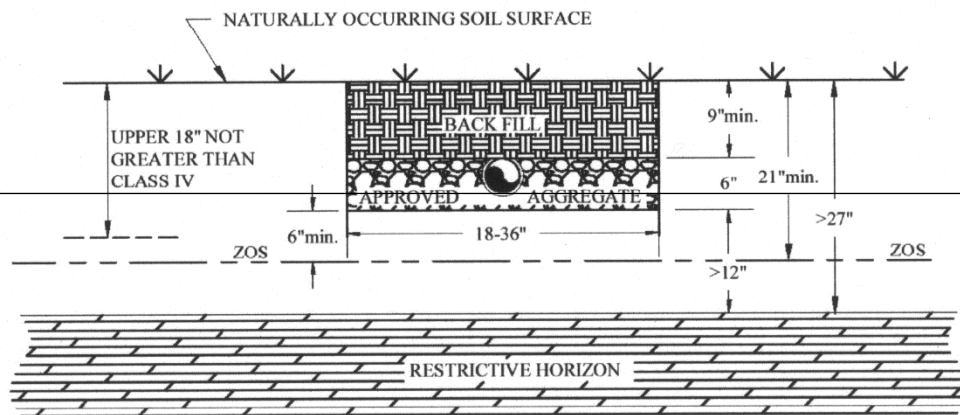

SCALE: 3/4"=1'


TLS REV. 05/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

ALTERNATIVE STANDARD
SHALLOW PLACEMENT WITH SIX (6) INCH AGGREGATE DEPTH

PROGRAM 362 / CODE 220 / CODE 221 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

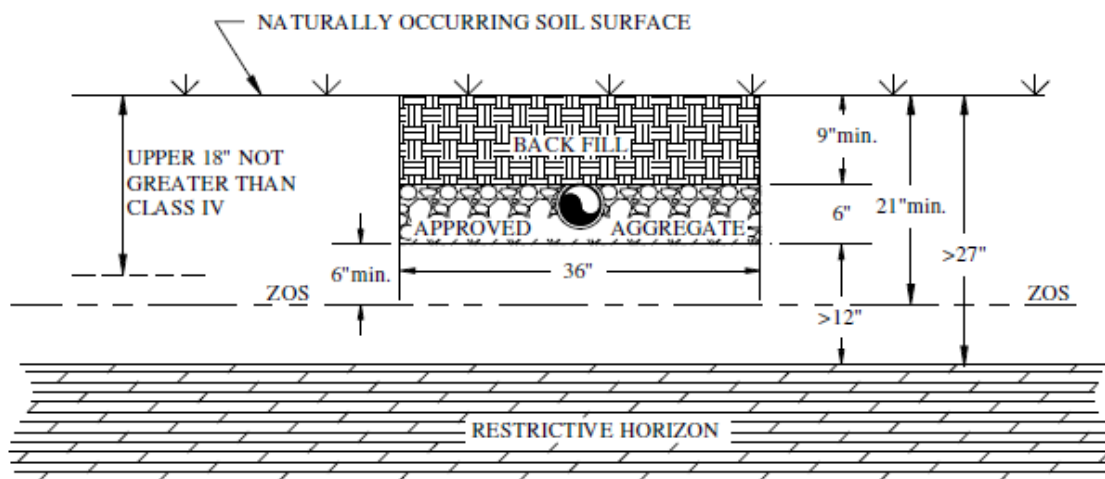

NOT TO SCALE

Rev. 03/09/18

~~404 APPENDIX D System Standard 230/231 Shallow Placement System WITH 14 INCH AGGREGATE DEPTH With Fill Cap~~
Appendix E – System Standard 230/231 – Shallow Placement with 14-Inch Aggregate Depth with Fill Cap

~~404.1 SITE/PERMITTING REQUIREMENTS (1) Site/Permitting Requirements~~

~~(1) (a)~~ There must not be a zone of saturation (ZOS) within twenty (20) inches of the naturally occurring soil surface.

~~(2) (b)~~ The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(3) (c)~~ The texture in the upper eighteen (18) inches of naturally occurring soil must be no more limiting than Class III.

~~(4) (d)~~ ~~This system must not be utilized on sites that require serial distribution. Level installations on slightly sloping sites can be considered if it can be demonstrated that the entire installation (i.e., side wall to side wall and end to end) will meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons. This system must not be used on sloping sites that require serial distribution unless it can be demonstrated that the entire wastewater infiltration trench installation (i.e., side wall to side wall and end to end) can meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons.~~

~~(5) (e)~~ The ~~Long Term Acceptance Rate~~long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(6) (f)~~ The total linear footage of wastewater infiltration trenches shall be the same as that required for conventional systems.

~~(7) (g)~~ There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. ~~This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of R. 61-56~~this regulation.

~~(8) (h)~~ This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~gpd.

~~404.2 INSTALLATION REQUIREMENTS (2) Installation Requirements~~

~~(1) (a)~~ The ~~maximum~~ wastewater infiltration trench width ~~must not exceed~~shall be thirty-six (36) inches; ~~the minimum width shall be eighteen (18) inches.~~

~~(2) (b)~~ The maximum depth of the bottom of the wastewater infiltration trench shall be fourteen (14) inches below the naturally occurring soil surface unless it can be demonstrated that deeper placement can meet the required textural limitations and the offsets to the zone of saturation and restrictive horizons.

~~(3) (c)~~ The depth of the fill cap shall provide a minimum of twelve (12) inches ~~backfill of soil cover~~above the top of the wastewater infiltration trench aggregate. (see attached illustration)

~~(4)~~ (d) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(5)~~ (e) The required fill cap must extend at least five (5) feet beyond the limits of the subsurface wastewater infiltration trenches; and must taper to the original soil surface at a slope not to exceed 10 percent. ~~(see attached illustration).~~ On sloping sites, where serial distribution has been incorporated into the system design, on the lower side and ends of the wastewater infiltration trenches, the fill cap must extend to at least ten (10) feet beyond the limits of the wastewater infiltration trenches and must taper to the original soil surface at a slope not to exceed five (5) percent. The required property line setback shall be measured from the point at which the fill cap taper intersects with the natural soil surface. The fill cap must be installed prior to beginning trench installation when required on the construction permit.

~~(6)~~ (f) The required fill material must be soil texture Class I, Class II_s or Class III and be devoid of extraneous debris such as organic matter, building materials, etc.

~~(7)~~ (g) The wastewater infiltration trench aggregate shall be fourteen (14) inches in depth.

~~(8)~~ (h) All tree/brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~404.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) The septic tank and fill cap area shall be backfilled and shaped to promote the runoff of surface water.

~~(2)~~ (b) Where natural surface drainage does not exist, a swale shall be constructed adjacent to the fill cap area to divert surface water away from the onsite wastewater system to a positive outfall. –The installation of ditches, curtain drains, and rain gutters may be required to intercept and divert water away from the onsite wastewater system location.

~~(3)~~ (c) A barrier to preclude parking and vehicular traffic over the system area may be required.

~~(4)~~ (d) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(5)~~ (e) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
SHALLOW PLACEMENT SYSTEM WITH FILL CAP

PROGRAM 362 / CODE 230 / CODE 231 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

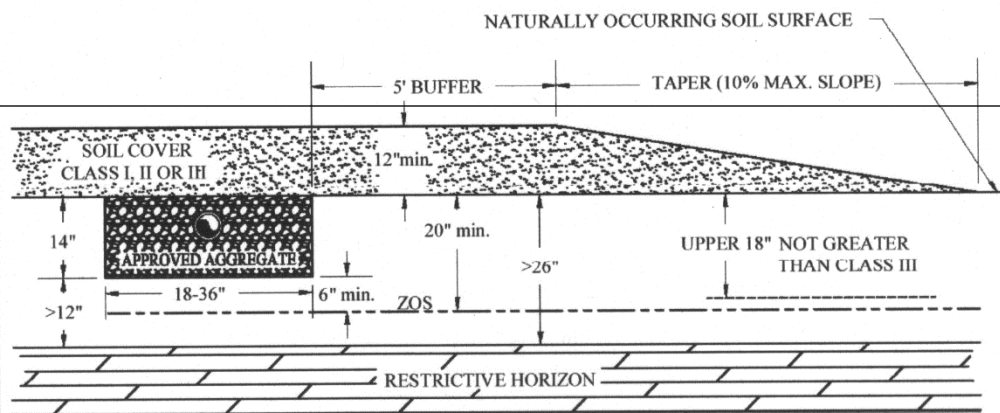


NOT TO SCALE

T15 REV 03/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

ALTERNATIVE STANDARD
SHALLOW PLACEMENT SYSTEM WITH FILL CAP
PROGRAM 362 / CODE 230 / CODE 231 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

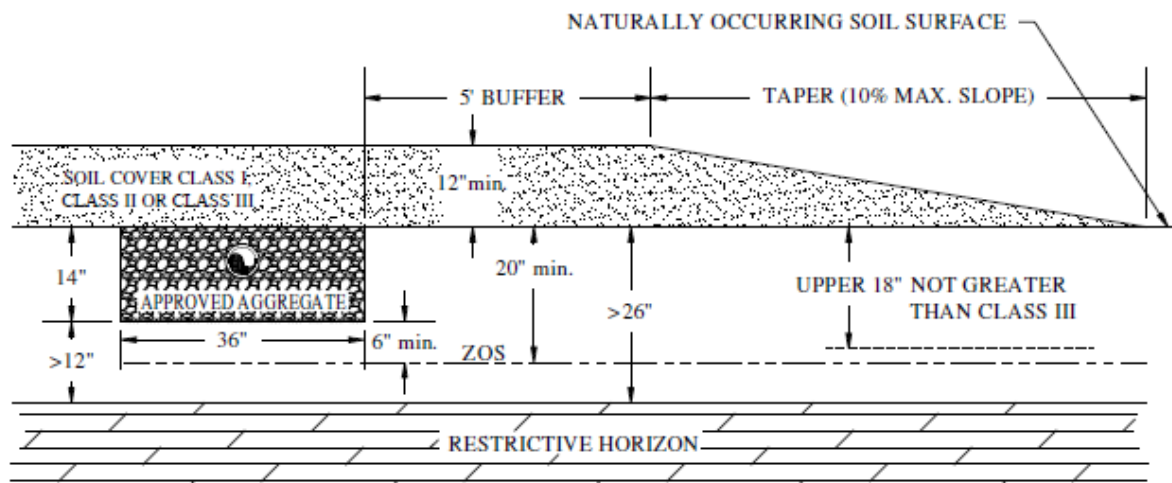

NOT TO SCALE

Rev. 03/09/18

~~405 Appendix E – SYSTEM STANDARD 240/241 – ULTRA SHALLOW PLACEMENT WITH 6-INCH AGGREGATE DEPTH WITH FILL CAP~~
Appendix F – System Standard 240/241 – Ultra-Shallow Placement with 6-Inch Aggregate Depth with Fill Cap

~~405.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

~~(1)~~ (a) There must not be a zone of saturation (ZOS) within twelve (12) inches of the naturally occurring soil surface.

~~(2)~~ (b) The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(3)~~ (c) The soil texture in the upper eighteen (18) inches of naturally occurring soil must be no more limiting than Class III.

~~(4)~~ (d) ~~This system must not be utilized on sites that require serial distribution. Level installations on slightly sloping sites can be considered if it can be demonstrated that the entire installation (i.e., side wall to side wall and end to end) will meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons. This system must not be used on sloping sites that require serial distribution unless it can be demonstrated that the entire wastewater infiltration trench installation (i.e., side wall to side wall and end to end) meets the required textural limitations and required offsets to the zone of saturation and restrictive horizons.~~

~~(5)~~ (e) No part of this system can be installed within one hundred twenty-five (125) feet of the critical area line or tidal waters as determined by the Department; or within one hundred twenty-five (125) feet of the ordinary high water elevation within the banks of non-tidal, environmentally sensitive waters.

~~(6)~~ (f) ~~The Long Term Acceptance Rate~~ long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(7)~~ (g) Due to the decreased sidewall area and the increased potential for ground water mounding near the surface, the Equivalency Factors for these systems shall be calculated by conventional wastewater infiltration trenches and increased by an additional factor of 0.12 times.

~~(8)~~ (h) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of ~~R. 61-56~~ this regulation.

~~(9)~~ (i) This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~ gpd.

~~405.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1)~~ (a) The ~~maximum~~ wastewater infiltration trench width ~~must not exceed~~ shall be thirty-six (36) inches; ~~the minimum width shall be 18 inches.~~

~~(2)~~ (b) The maximum depth of the bottom of the wastewater infiltration trench shall be six (6) inches below the naturally occurring soil surface unless it can be demonstrated that deeper placement can meet the required textural limitations and offsets to the zone of saturation and restrictive horizons.

~~(3)~~ (c) The depth of the fill cap shall provide a minimum of twelve (12) inches backfill above the top of the wastewater infiltration trench aggregate ~~(see attached illustration)~~.

(4) (d) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(5)~~ (e) The required fill cap must extend at least five (5) feet beyond the limits of the subsurface wastewater infiltration trenches, and must taper to the original soil surface at a slope not to exceed of 10 percent. ~~(see attached illustration)~~ On sloping sites where serial distribution has been incorporated into the system design, on the lower side and ends of the wastewater infiltration trenches, the fill cap must extend to at least ten (10) feet beyond the limits of the wastewater infiltration trenches and must taper to the original soil surface at a slope not to exceed five (5) percent. -The required property line setback shall be measured from the point at which the fill cap taper intersects with the natural soil surface. The fill cap must be installed prior to beginning trench installation when required on the construction permit.

~~(6)~~ (f) The required fill material must be soil texture Class I, Class II, or Class III, and be devoid of extraneous debris such as organic matter, building materials, etc.

~~(7)~~ (g) The wastewater infiltration trench aggregate shall be six (6) inches in depth.

~~(8)~~ (h) All tree/brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~405.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) The septic tank and fill cap area shall be backfilled and shaped to promote the runoff of surface water.

~~(2)~~ (b) Where natural surface drainage does not exist, a swale shall be constructed adjacent to the fill cap area to divert surface water away from the onsite wastewater system to a positive outfall. -The installation of ditches, curtain drains, and rain gutters may be required to intercept and divert water away from the onsite wastewater system location.

~~(3)~~ (c) A barrier to preclude parking and vehicular traffic over the system area may be required.

~~(4)~~ (d) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(5)~~ (e) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
ULTRA-SHALLOW PLACEMENT SYSTEM WITH FILL CAP

PROGRAM 362 / CODE 240 / CODE 241 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

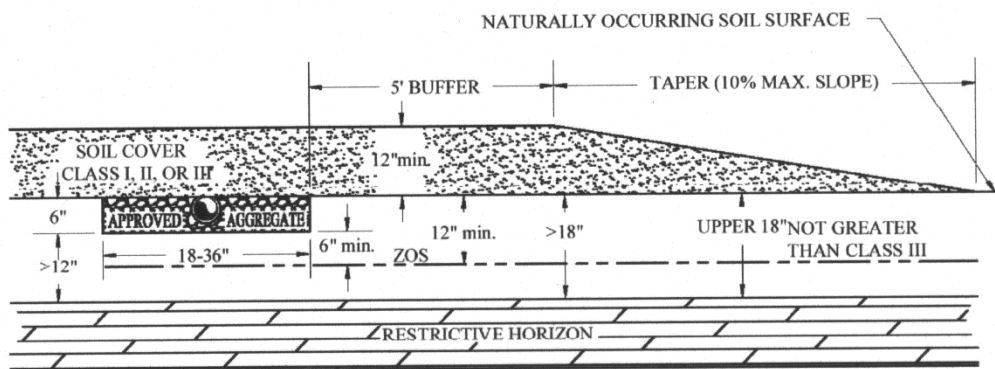

NOT TO SCALE

TLS REV 03/16/07

~~406 APPENDIX F—System Standard 250/251—Reservoir Infiltration System For Soils With Expansive Clay~~
Appendix G – System Standard 250/251 – Reservoir Infiltration System for Soils with Expansive Clay

~~406.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

- ~~(1)~~ (a) Rock formations must be greater than four (4) feet below the naturally occurring soil surface.
- ~~(2)~~ (b) For standard installations (see Typical Design Illustration A), the wastewater infiltration trenches must penetrate the saprolite at least six (6) inches. ~~Also, there~~ There must be an offset greater than twelve (12) inches between the bottom of the trenches and any rock formations. (i.e., there must be greater than eighteen (18) inches of clean, unconsolidated saprolite below the expansive clay layer.)
- ~~(3)~~ (c) If the unconsolidated saprolite layer is greater than sixty (60) inches below the naturally occurring soil surface (see Typical Design Illustration B), ~~item 2, paragraph (1)(b)~~ (b) (above) shall apply and clean medium sand shall be added to the trenches so that the top of the aggregate will be twelve (12) inches below finished grade.
- ~~(4)~~ (d) There must be no evidence of a zone of saturation (ZOS) in the unconsolidated saprolite layer.
- ~~(5)~~ (e) The ~~Long-Term Acceptance Rate~~ long-term acceptance rate shall not exceed 0.25 gpd/sq. ft.
- ~~(6)~~ (f) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. ~~-This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of R. 61-56~~ this regulation.
- ~~(7)~~ (g) Sites to be considered for this system shall be evaluated using backhoe pits to describe the soil profile.
- ~~(8)~~ (h) This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~ gpd.
- ~~(a)~~ (i) Clean, unconsolidated saprolite shall be defined as: ~~Soft~~ soft, friable, thoroughly decomposed rock that has formed in place by chemical weathering, retaining the fabric and structure of the parent rock, and being devoid of expansive clay. Unconsolidated saprolite can be dug using a hand auger or knife. ~~-Consolidated saprolite cannot be penetrated with a hand auger or similar tool; and must be dug with a backhoe or other powered equipment.~~

~~(b)~~ (ii) Expansive clay shall be defined as soils containing significant amounts of expansible-layer clay minerals or smectites as evidenced in the field by classifications of Very Sticky and Very Plastic and Structure Grades of Weak or Structureless when evaluated in accordance with the Field Book. ~~-Such soils are considered to be unsuitable for onsite wastewater systems.~~

~~406.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

- ~~(1)~~ (a) The ~~aggregate depth of approved aggregate~~ shall be twenty-four (24) inches.
- ~~(2)~~ (b) The depth of medium sand will vary between zero (0) and one hundred twenty (120) inches, depending upon the depth to the saprolite layer.
- ~~(3)~~ (c) The trench width shall be thirty-six (36) inches.

~~(4)~~ (d) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(5)~~ (e) The backfill shall range from twelve (12) inches to thirty-six (36) inches for standard installations (see Typical Design Illustration A); and shall be twelve (12) inches where the depth to saprolite is greater than sixty (60) inches below the naturally occurring soil surface (see Typical Design Illustration B).

~~406.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) On sites where there is evidence of a zone of saturation at the soil-expansive clay interface, a curtain drain must be placed upslope along a contour and must extend the entire length of the subsurface wastewater infiltration area. -The curtain drain shall extend a minimum of six (6) inches into the expansive clay layer. -The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.

~~(2)~~ (b) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(3)~~ (c) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

**ALTERNATIVE SYSTEM
RESERVOIR INFILTRATION SYSTEM FOR SOILS WITH EXPANSIVE CLAY**

PROGRAM 362 / CODE 250 / CODE 251 IF PUMPED

**TYPICAL DESIGN ILLUSTRATION (A)
STANDARD INSTALLATION**

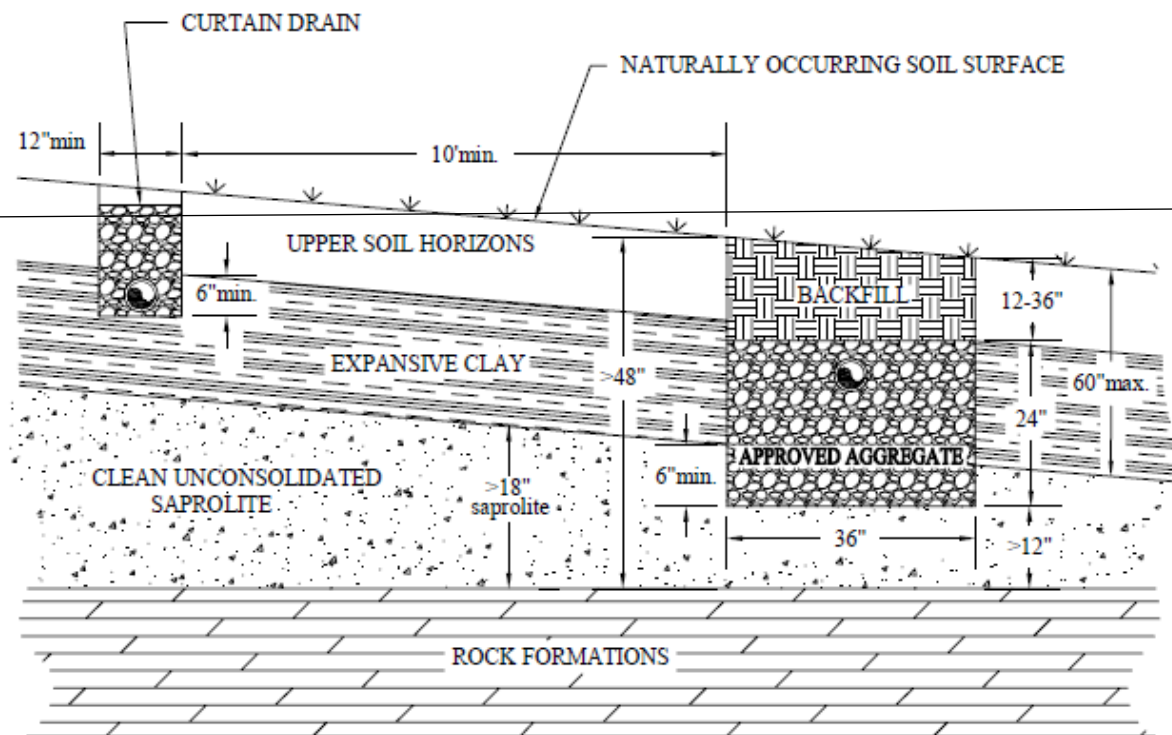

NOTE: FOR SOILS WITH THICK EXPANSIVE CLAY HORIZONS
(i.e., DEPTH TO SAPROLITE > 60 INCHES BELOW NATURALLY OCCURRING SOIL SURFACE)
SEE TYPICAL DESIGN ILLUSTRATION (B)

NOT TO SCALE


TS & BWV 05/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

**ALTERNATIVE SYSTEM
RESERVOIR INFILTRATION SYSTEM FOR SOILS WITH EXPANSIVE CLAY**

PROGRAM 362 / CODE 250 / CODE 251 IF PUMPED

**TYPICAL DESIGN ILLUSTRATION (B)
WHERE DEPTH TO SAPROLITE > 60in. BELOW SURFACE**

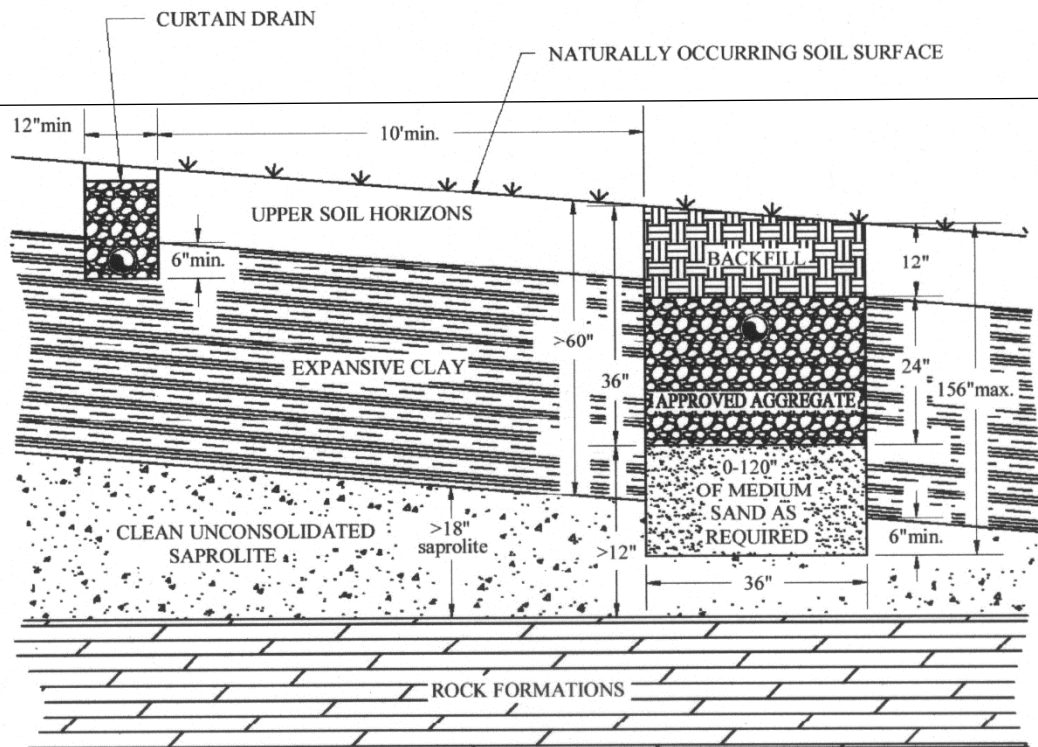

NOTE: FOR SOILS WITH THINNER EXPANSIVE CLAY HORIZONS
(i.e., DEPTH TO SAPROLITE NOT >60in. BELOW NATURALLY OCCURRING SOIL SURFACE)
SEE TYPICAL DESIGN ILLUSTRATION (A)

NOT TO SCALE


TLS REV. 03/16/97

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

**ALTERNATIVE SYSTEM
RESERVOIR INFILTRATION SYSTEM FOR SOILS WITH EXPANSIVE CLAY**

PROGRAM 362 / CODE 250 / CODE 251 IF PUMPED

**TYPICAL DESIGN ILLUSTRATION (A)
STANDARD INSTALLATION**

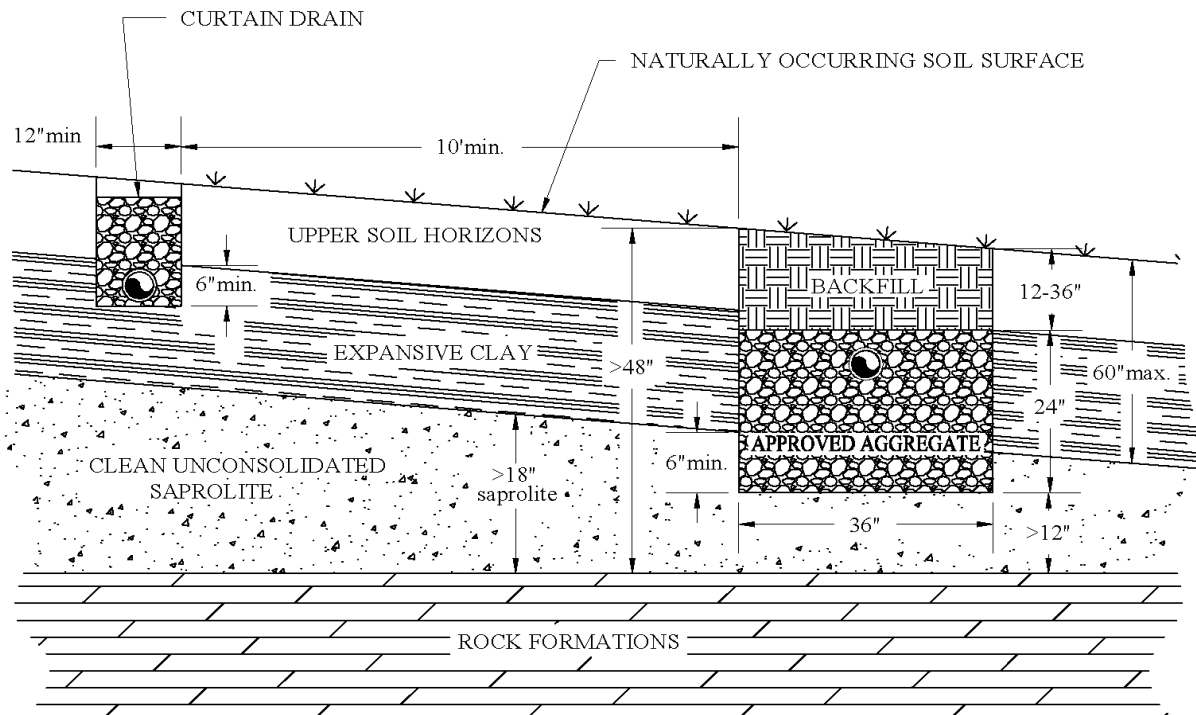

NOTE: FOR SOILS WITH THICK EXPANSIVE CLAY HORIZONS
(i.e., DEPTH TO SAPROLITE > 60 INCHES BELOW NATURALLY OCCURRING SOIL SURFACE)
SEE TYPICAL DESIGN ILLUSTRATION (B)


NOT TO SCALE
REV. 03/09/18

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

ALTERNATIVE SYSTEM
RESERVOIR INFILTRATION SYSTEM FOR SOILS WITH EXPANSIVE CLAY

PROGRAM 362 / CODE 250 / CODE 251 IF PUMPED

**TYPICAL DESIGN ILLUSTRATION (B)
WHERE DEPTH TO SAPROLITE > 60in. BELOW SURFACE**

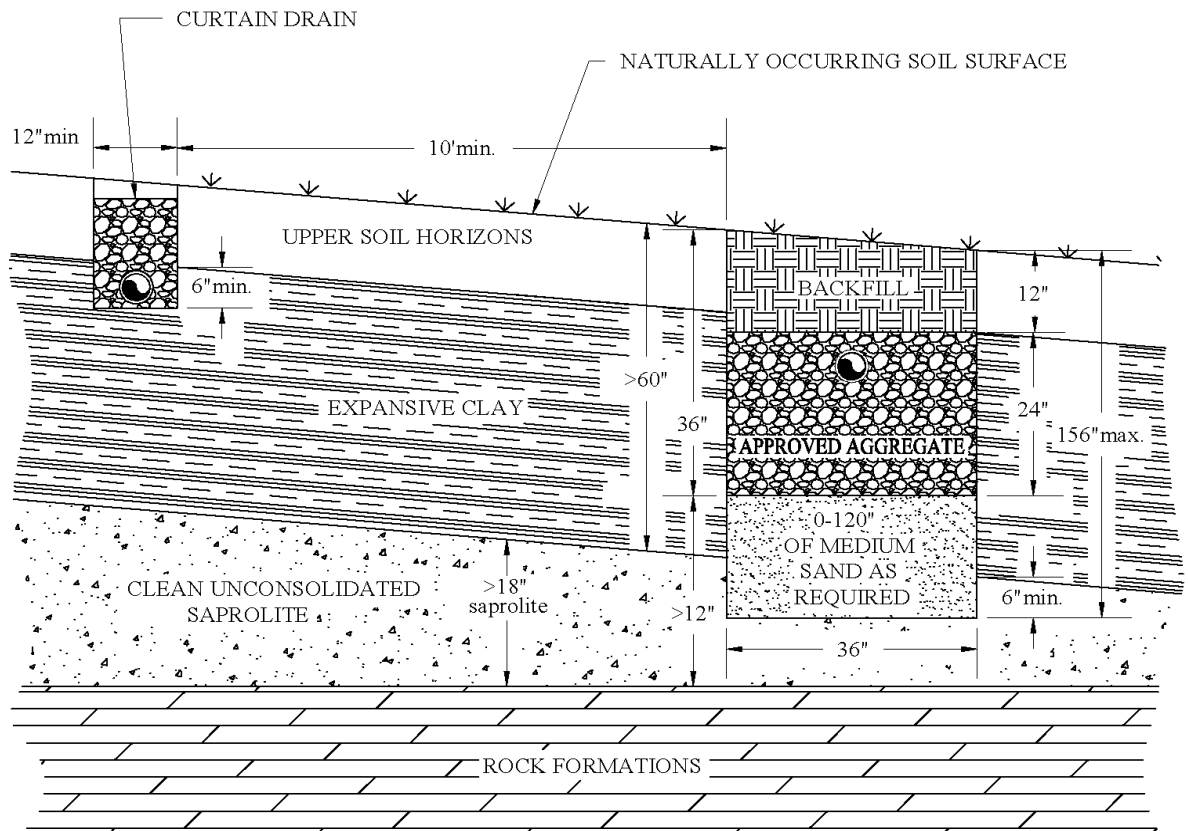

NOTE: FOR SOILS WITH THINNER EXPANSIVE CLAY HORIZONS
(i.e., DEPTH TO SAPROLITE NOT >60in. BELOW NATURALLY OCCURRING SOIL SURFACE)
SEE TYPICAL DESIGN ILLUSTRATION (A)

NOT TO SCALE

REV.03/09/18

~~407 APPENDIX G System Standard 260/261 9 INCH Shallow Placement System With Fill Cap~~
Appendix H – System Standard 260/261 – 9-Inch Shallow Placement System with Fill Cap

~~407.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

~~(1)~~ (a) There must not be a zone of saturation (ZOS) within fifteen (15) inches of the naturally occurring soil surface.

~~(2)~~ (b) The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(3)~~ (c) The texture in the upper eighteen (18) inches of naturally occurring soil must be no more limiting than Class III.

~~(4)~~ (d) ~~This system must not be utilized on sites that require serial distribution. Level installations on slightly sloping sites can be considered if it can be demonstrated that the entire installation (i.e., side wall to side wall and end to end) will meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons. This system must not be used on sloping sites that require serial distribution unless it can be demonstrated that the entire wastewater infiltration trench installation (i.e., side wall to side wall and end to end) can meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons.~~

~~(5)~~ (e) The ~~Long Term Acceptance Rate~~ long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(6)~~ (f) Due to the decreased sidewall absorption area and the increased potential for ground water mounding near the surface, the Equivalency Factors for these systems shall be calculated by conventional wastewater infiltration trenches and increased by an additional factor of 0.09 times.

~~(7)~~ (g) No part of this system can be installed within 125 feet of the critical area line or tidal waters as determined by the Department; or within 125 feet of the ordinary high water elevation within the banks of non-tidal, environmentally sensitive waters.

~~(8)~~ (h) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration, and shall meet the minimum soil and site conditions of ~~R-61-56~~ this regulation.

~~(9)~~ (i) This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~ gpd.

~~407.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1)~~ (a) The ~~maximum~~ wastewater infiltration trench width ~~must not exceed~~ shall be thirty-six (36) inches; ~~the minimum width shall be eighteen (18) inches.~~

~~(2)~~ (b) The maximum depth of the bottom of the wastewater infiltration trench shall be nine (9) inches below the naturally occurring soil surface unless it can be demonstrated that deeper placement can meet the required textural limitations and the offsets to the zone of saturation and restrictive horizons.

~~(3)~~ (c) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(4)~~ (d) The depth of the fill cap shall provide a minimum of twelve (12) inches backfill above the top of the wastewater infiltration trench aggregate ~~(see attached illustration)~~.

~~(5)~~ (e) The required fill cap must extend at least five (5) feet beyond the limits of the wastewater infiltration trenches; and must taper to the original soil surface at a slope not to exceed 10 percent (see attached illustration). On sloping sites where serial distribution has been incorporated into the system design, on the lower side and ends of the wastewater infiltration trenches, the fill cap must extend to at least ten (10) feet beyond the limits of the wastewater infiltration trenches and must taper to the original soil surface at a slope not to exceed five (5) percent. The required property line setback shall be measured from the point at which the fill cap taper intersects with the naturally occurring soil surface. The fill cap must be installed prior to beginning trench installation when required on the construction permit.

~~(6)~~ (f) The required fill material must be soil texture Class I, Class II, or Class III, and be devoid of extraneous debris such as organic matter, building materials, etc.

~~(7)~~ (g) The wastewater infiltration trench aggregate shall be nine (9) inches in depth.

~~(8)~~ (h) All trees/brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~407.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) The septic tank and fill cap area shall be backfilled and shaped to promote the runoff of surface water.

~~(2)~~ (b) Where natural surface drainage does not exist, a swale shall be constructed adjacent to the fill cap area to divert surface water away from the onsite wastewater system to a positive outfall. –The installation of ditches, curtain drains, and rain gutters may be required to intercept and divert water away from the onsite wastewater system location.

~~(3)~~ (c) A barrier to preclude parking and vehicular traffic over the system area may be required.

~~(4)~~ (d) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(5)~~ (e) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
NINE INCH SHALLOW PLACEMENT WITH FILL CAP

PROGRAM 362 / CODE 260 / CODE 261 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

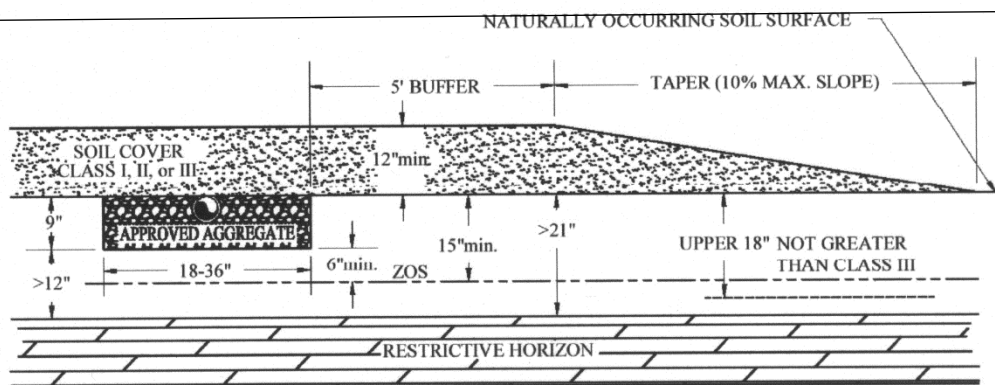


NOT TO SCALE

TIS REV 03/2007

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

**ALTERNATIVE STANDARD
NINE INCH SHALLOW PLACEMENT WITH FILL CAP
PROGRAM 362 / CODE 260 / CODE 261 IF PUMPED**

TYPICAL DESIGN ILLUSTRATION

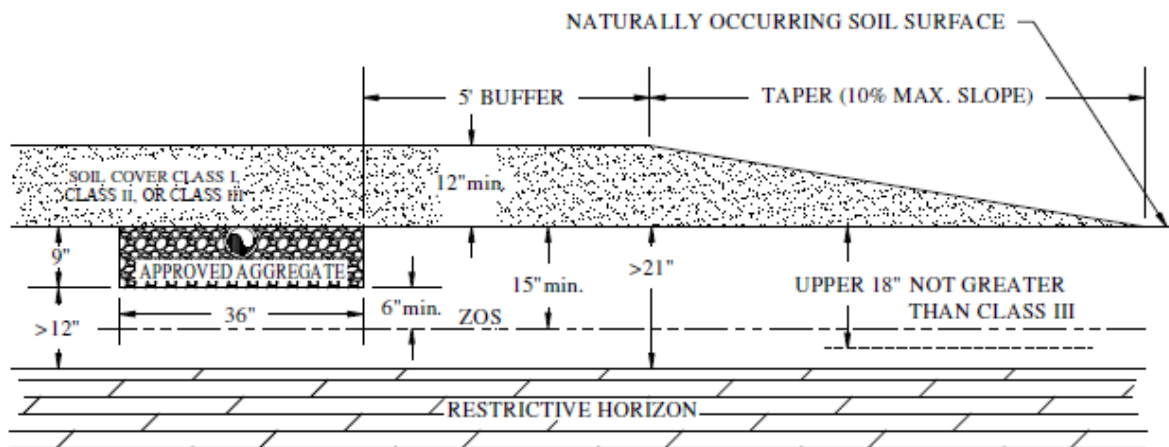

NOT TO SCALE

Rev. 03/09/18

~~408 APPENDIX H SYSTEM STANDARD 270/271 ALTERNATIVE TRENCH WIDTH AND DEPTH SYSTEMS~~
Appendix I – System Standard 270/271 – Alternative Trench Width and Depth Systems

~~408.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

~~(1) Lot size or suitable area must be too small to accommodate a conventional or alternative onsite wastewater system.~~

~~(2) This Standard and associated systems shall not be used to calculate minimum lot sizes in new subdivisions approved after the effective date of this standard.~~

~~(3)~~ (a) Soil conditions, the depth to rock and other restrictive horizons, the depth to the zone of saturation (ZOS), and the elevation differential between the septic tank outlet and the highest wastewater infiltration trench(es) must meet applicable standards for conventional or alternative onsite wastewater systems.

(4) (b) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration, and shall meet the minimum soil and site conditions of ~~R-61-56~~ this regulation.

~~(5)~~ (c) This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~ gpd unless the trench width is three (3) feet and the aggregate depth is between fourteen (14) and twenty-eight (28) inches.

(6) (d) The linear footage requirement for an alternative width and depth system shall be determined by first figuring the conventional (~~thirty-six (36)~~ thirty-six (36) inch wide with ~~fourteen (14)~~ fourteen (14) inch aggregate depth) linear footage requirements and then multiplying by the appropriate factor based on desired trench width and aggregate depth. (See table below system illustration for multiplication factors.)

FACTORS (F) FOR MAINTAINING EQUIVALENT INFILTRATIVE SURFACE AREA						
TRENCH WIDTH (ft.)	AGGREGATE DEPTH (in.)					
XXXXXXX X	6" *	9" **	14"	20"	24"	28"
1.5'	2.39	1.94	1.39	1.10	0.97	0.87
2.0'	1.99	1.66	1.23	1.00	0.89	0.80
2.5'	1.71	1.46	1.10	0.91	0.82	0.75
3'	1.50	1.30	1.00	0.84	0.76	0.70***
4'	1.20	1.06	0.84	0.73	0.67	0.62
5'	1.00	0.89	0.73	0.64	0.59	0.55
6'	0.85	0.78	0.64	0.57	0.53	0.50
7'	0.74	0.68	0.57	0.52	0.49	0.46
8'	0.66	0.61	0.52	0.47	0.45	0.42
9'	0.59	0.55	0.47	0.43	0.41	0.39
10'	0.54	0.51	0.43	0.40	0.38	0.36

FACTORS (F) FOR MAINTAINING EQUIVALENT INFILTRATIVE SURFACE AREA						
TRENCH WIDTH (ft.)	AGGREGATE DEPTH (in.)					
XXXXXXXX X	6" *	9" **	14"	20"	24"	28"
$F = 5.34 \text{ ft}^2/\text{ft} \frac{2(\text{SwD} / 12) + \text{TW}}{\text{X}}$ * Factors reflect a 12 percent increase ** Factors reflect a 9 percent increase *** Use system code 360/380			Where, $5.34 \text{ ft}^2/\text{ft}$ = total infiltrative surface area per linear foot of conventional type trench 36 in. wide, 14 in. deep SwD = Side Wall Depth (in.) TW = Trench Width (ft)			

~~408.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

- ~~(1)~~ (a) Trench widths ~~shall always be kept as narrow as possible and~~ shall not exceed ten (10) feet.
- ~~(2)~~ (b) The aggregate depth shall be between six (6) inches and twenty-eight (28) inches when considering trench widths ranging from one and one-half (1½) to ten (10) feet (see chart). -The aggregate depth may be increased to a maximum of forty-two (42) inches, provided the trench width does not exceed thirty-six (36) inches (Note: ~~in~~ In these cases, the equivalency formula should be utilized to determine the appropriate factor (F) when considering aggregate depths between twenty-eight (28) and forty-two (42) inches). -All trenches shall be covered with at least nine (9) inches of backfill.
- ~~(3)~~ (c) Methods of construction which preclude vehicular compaction of the trench bottom must always be utilized.

~~408.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage


- ~~(1)~~ (a) Installation of drainage swales, ditches, diversion drains, or rain gutters may be required to divert or intercept water away from the onsite wastewater system location. -The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.
- ~~(2)~~ (b) A barrier to preclude parking and vehicular traffic over the area of the system may be required.
- ~~(3)~~ (c) Following final landscaping, seeding or sodding may be required to prevent erosion.
- ~~(4)~~ (d) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

**ALTERNATIVE SYSTEM
ALTERNATIVE TRENCH WIDTH & DEPTH SYSTEMS**

PROGRAM 362 / CODE 270 / CODE 271 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

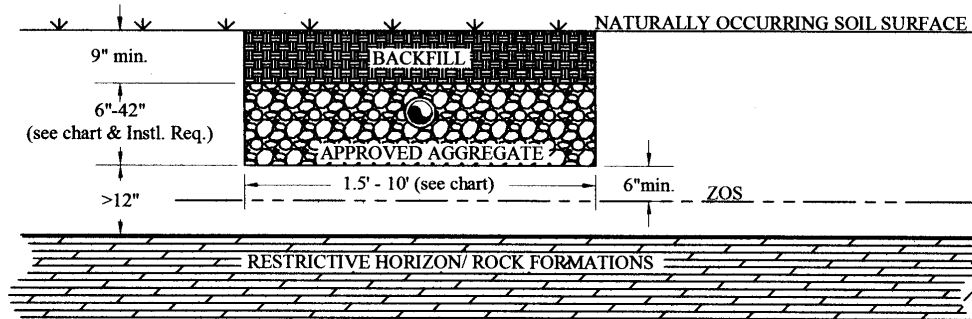

NOT TO SCALE

FACTORS (F) FOR MAINTAINING EQUIVALENT INFILTRATIVE SURFACE AREA

TRENCH WIDTH (ft.)	AGGREGATE DEPTH (in.)					
	6" *	9" **	14"	20"	24"	28"
1.5'	2.39	1.94	1.39	1.10	0.97	0.87
2.0'	1.99	1.66	1.23	1.00	0.89	0.80
2.5'	1.71	1.46	1.10	0.91	0.82	0.75
3.0'	1.50	1.30	1.00	0.84	0.76	0.70***
4.0'	1.20	1.06	0.84	0.73	0.67	0.62
5.0'	1.00	0.89	0.73	0.64	0.59	0.55
6.0'	0.85	0.78	0.64	0.57	0.53	0.50
7.0'	0.74	0.68	0.57	0.52	0.49	0.46
8.0'	0.66	0.61	0.52	0.47	0.45	0.42
9.0'	0.59	0.55	0.47	0.43	0.41	0.39
10.0'	0.54	0.51	0.43	0.40	0.38	0.36

$$F = \frac{5.34 \text{ sqft. / ft}}{2(\text{SwD} / 12) + \text{TW}}$$

* Factors (F) reflect 12% increase

** Factors (F) reflect 9% increase

*** Use system code 360/380

(See notes in text)

Where, 5.34 sqft/ft = total infiltrative surface area per linear foot of conventional type trench (36in. wide, 14in. deep)

SwD = Side Wall Depth (in)

TW = Trench Width (ft.)


TLS REV. 05/15/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

ALTERNATIVE STANDARD
ALTERNATIVE TRENCH WIDTH & DEPTH SYSTEMS

PROGRAM 362 / CODE 270 / CODE 271 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

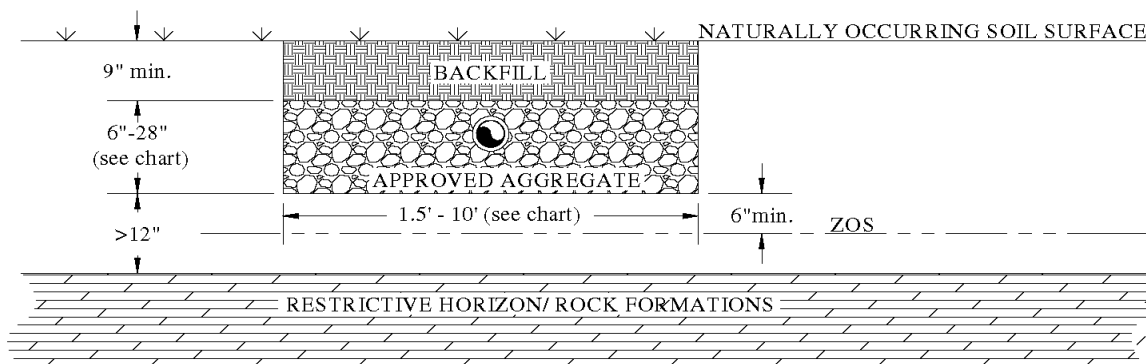

NOT TO SCALE

FACTORS (F) FOR MAINTAINING EQUIVALENT INFILTRATIVE SURFACE AREA

TRENCH WIDTH (ft.)	AGGREGATE DEPTH (in.)					
	6" *	9" **	14"	20"	24"	28"
1.5'	2.39	1.94	USE LTAR STANDRRARD	1.10	0.97	0.87
2.0'	1.99	1.66	USE LTAR STANDARD	1.00	0.89	0.80
2.5'	1.71	1.46	USE LTAR STANDARD	0.91	0.82	0.75
3.0'	1.50	1.30	USE LTAR STANDARD	0.84	0.76	0.70 see system 360/380
4.0'	1.20	1.06	0.84	0.73	0.67	0.62
5.0'	1.00	0.89	0.73	0.64	0.59	0.55
6.0'	0.85	0.78	0.64	0.57	0.53	0.50
7.0'	0.74	0.68	0.57	0.52	0.49	0.46
8.0'	0.66	0.61	0.52	0.47	0.45	0.42
9.0'	0.59	0.55	0.47	0.43	0.41	0.39
10.0'	0.54	0.51	0.43	0.40	0.38	0.36

$$F = \frac{5.33 \text{ sqft. / ft}}{2 (\text{SwD} / 12) + \text{TW}}$$

* Factors (F) reflect 12% increase
** Factors (F) reflect 9% increase
(See notes in text)

Where, 5.33 sqft/ft = total infiltrative surface area per linear foot of conventional type trench (36in. wide, 14in. deep)

SwD = Side Wall Depth (in)

TW = Trench Width (ft.)

REV. 03/09/2018

~~409 APPENDIX I — SYSTEM STANDARD 280/281 — RESERVOIR INFILTRATION SYSTEM FOR SOILS WITH EXPANSIVE CLAY SHALLOW ROCK FORMATIONS~~
Appendix J – System Standard 280/281 – Reservoir Infiltration System for Soils with Expansive Clay Shallow Rock Formations

~~409.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

~~(1)~~ (a) Rock formations must be rippable ~~(see Section 409.1(9)(b))~~ to a depth greater than four (4) feet below the naturally occurring soil surface.

~~(2)~~ (b) The soil wastewater infiltration trenches must penetrate the saprolite at least six (6) inches, and there must be an offset greater than twelve (12) inches between the trench bottoms and any rock formations (i.e., there must be at least six (6) inches of clean, unconsolidated saprolite below the expansive clay layer, and medium sand may be added to the excavation to achieve an offset from rock that exceeds twelve (12) inches).

~~(3)~~ (c) There must be no evidence of a zone of saturation (ZOS) in the unconsolidated saprolite layer.

~~(4)~~ (d) The ~~Long Term Acceptance Rate~~ long-term acceptance rate shall not exceed 0.20-gpd/sqft.

~~(5)~~ (e) Effluent discharged to this system must receive a higher degree of treatment than that provided by a conventional septic tank; ~~(i.e., e.g., two (2) compartment septic tank or two (2) septic tanks in series).~~

~~(6)~~ (f) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of ~~R. 61-56~~ this regulation.

~~(7)~~ (g) No part of this system can be installed within one hundred twenty-five (125) feet of the ordinary high water elevation within the banks of environmentally sensitive waters.

~~(8)~~ (h) Sites to be considered for this system shall be evaluated using backhoe pits to describe the soil profile.

~~(9)~~ (i) This system cannot be considered for facilities with peak flow rates in excess of fifteen hundred (1500) ~~gallons per day~~ gpd.

~~(a)~~ (i) Clean, unconsolidated saprolite shall be defined as: ~~Soft~~ soft, friable thoroughly decomposed rock that has formed in place by chemical weathering, retaining the fabric and structure of the parent rock, and being devoid of expansive clay. -Unconsolidated saprolite can be dug using a hand auger or knife. Consolidated saprolite cannot be penetrated with a hand auger or similar tool, and must be dug with a backhoe or other powered equipment.

~~(b)~~ Rippable rock shall be defined as formations that can be readily dug with a standard rubber-tired backhoe.

~~(c)~~ (ii) Expansive clay shall be defined as soils containing significant amounts of expansible-layer clay minerals (smectites) as evidenced in the field by classifications of Very Sticky and Very Plastic and Structure Grades of Weak or Structureless when evaluated in accordance with the Field Books. -Such soils are considered to be unsuitable for onsite wastewater systems.

~~409.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1)~~ (a) The ~~aggregate~~ depth of approved aggregate shall be at least twenty-four (24) inches.

~~(2)~~ (b) The trench width shall be thirty-six (36) inches.

~~(3)~~ (c) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~409.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) On sites where there is evidence of a zone of saturation at the soil-expansive clay interface, a curtain drain must be placed upslope along a contour and must extend the entire length of the subsurface wastewater infiltration area. -The curtain drain shall extend a minimum of six (6) inches into the expansive clay layer. ~~Also, the~~ The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.

~~(2)~~ (b) Final approval shall be withheld until all landscaping, drainage, and other requirements have been satisfactorily completed.

~~(3)~~ (c) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(4)~~ (d) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

**ALTERNATIVE SYSTEM
RESERVOIR INFILTRATION SYSTEM FOR SOILS WITH EXPANSIVE CLAY
OVER SHALLOW ROCK FORMATIONS**

PROGRAM 362 / CODE 280 / CODE 281 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

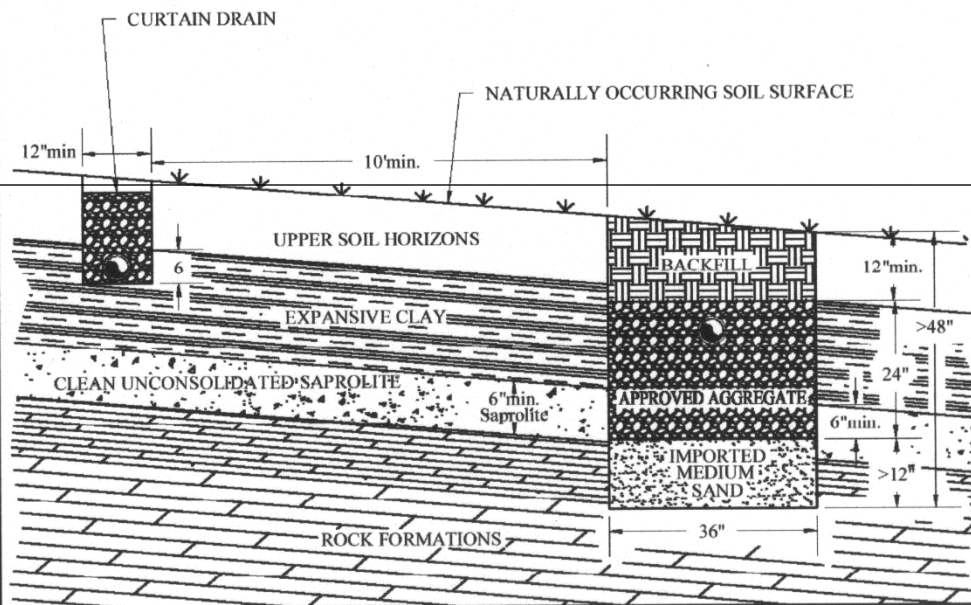

NOT TO SCALE


TLS REV 01/2017

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

**ALTERNATIVE SYSTEM
RESERVOIR INFILTRATION SYSTEM FOR SOILS WITH EXPANSIVE CLAY
OVER SHALLOW ROCK FORMATIONS**

PROGRAM 362 / CODE 280 / CODE 281 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

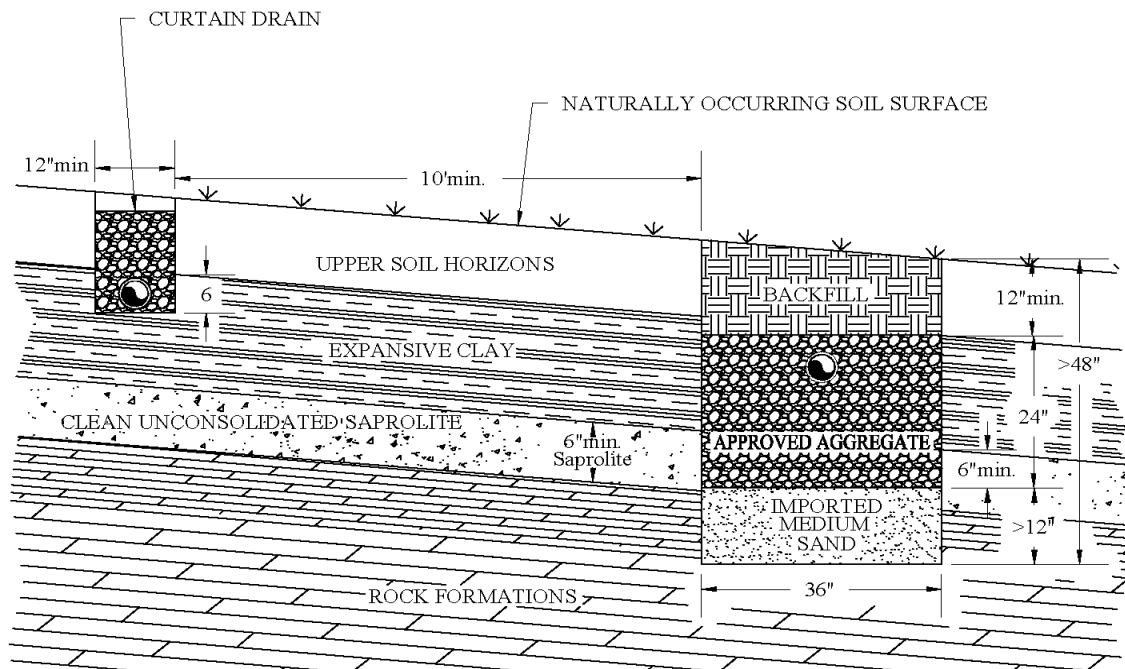

NOT TO SCALE
REV. 03/09/19

Appendix K – System Standard 290/291 – Alternative Trench Width and Depth Systems with Fill Cap

(1) Site/Permitting Requirements

(a) The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

(b) The texture in the upper eighteen (18) inches of naturally occurring soil must be no more limiting than Class III.

(c) Soil conditions, the depth to rock and other restrictive horizons, the depth to the zone of saturation (ZOS), and the elevation differential between the septic tank outlet and the highest wastewater infiltration trench(es) must meet applicable standards for alternative onsite wastewater systems.

(d) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. This area shall have a suitable configuration and shall meet the minimum soil and site conditions of this regulation.

(e) This system cannot be considered for facilities with peak flow rates in excess of six hundred (600) gpd.

(f) The linear footage requirement for an alternative width and depth system shall be determined by first figuring the conventional (36-inch-wide with 14-inch aggregate depth) linear footage requirements and then multiplying by the appropriate factor based on desired trench width and aggregate depth as computed in the following table:

<u>FACTOR (F) FOR MAINTAINING EQUIVALENT INFILTRATIVE SURFACE AREA</u>			
<u>TRENCH WIDTH (ft.)</u>	<u>AGGREGATE DEPTH (in.)</u>		
	<u>6" *</u>	<u>9" **</u>	<u># OF DISTRIBUTION PIPES</u>
	<u>MULTIPLICATION FACTOR</u>		
<u>4'</u>	<u>1.20</u>	<u>1.06</u>	<u>1</u>
<u>5'</u>	<u>1.00</u>	<u>0.89</u>	<u>1</u>
<u>6'</u>	<u>0.85</u>	<u>0.78</u>	<u>2</u>
<u>7'</u>	<u>0.74</u>	<u>0.68</u>	<u>2</u>
<u>8'</u>	<u>0.66</u>	<u>0.61</u>	<u>2</u>
<u>9'</u>	<u>0.59</u>	<u>0.55</u>	<u>3</u>
<u>10'</u>	<u>0.54</u>	<u>0.51</u>	<u>3</u>
<u>* Factors reflect a twelve (12) percent increase</u>			
<u>** Factors reflect a nine (9) percent increase</u>			

(g) This system may only be installed on sites where the long-term acceptance rate (LTAR) for the system will be between 1.0 and 0.5 gpd per foot squared (gpd/ft²). The bottom of the absorption field cannot be installed in Class IV soils (0.4 to 0.1 LTAR).

(h) The distribution pipes in the bed shall be at least eighteen (18) inches from the edge of the trench and located on three (3) foot centers.

(i) This system must not be used on sloping sites that require serial distribution unless it can be demonstrated that the entire wastewater infiltration trench installation (i.e., side wall to side wall and end to end) can meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons.

(j) The long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

(2) Installation Requirements

(a) Trench widths shall not exceed ten (10) feet.

(b) Wide trenches should be installed by excavating from the sides. Heavy equipment, such as backhoes, may not be placed in the trenches in order to avoid soil compaction.

(c) The required fill cap must extend at least five (5) feet beyond the limits of the wastewater infiltration trenches and must taper to the original soil surface at a slope not to exceed ten (10) percent. On sloping sites, where serial distribution has been incorporated into the system design, on the lower side and ends of the wastewater infiltration trenches, the fill cap must extend to at least ten (10) feet beyond the limits of the wastewater infiltration trenches and must taper to the original soil surface at a slope not to exceed five (5) percent. The required property line setback shall be measured from the point at which the fill cap taper intersects with the naturally occurring soil surface. The fill cap must be installed prior to beginning trench installation when required on the construction permit.

(3) Final Landscaping and Drainage

(a) Installation of drainage swales, ditches, diversion drains, or rain gutters may be required to divert or intercept water away from the onsite wastewater system location. The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.

(b) A barrier to preclude parking and vehicular traffic over the area of the system may be required.


(c) Following final landscaping, seeding, or sodding may be required to prevent erosion.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

**ALTERNATIVE STANDARD
ALTERNATIVE TRENCH WIDTH & DEPTH SYSTEMS**

PROGRAM 362 / CODE 290 / CODE 291 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

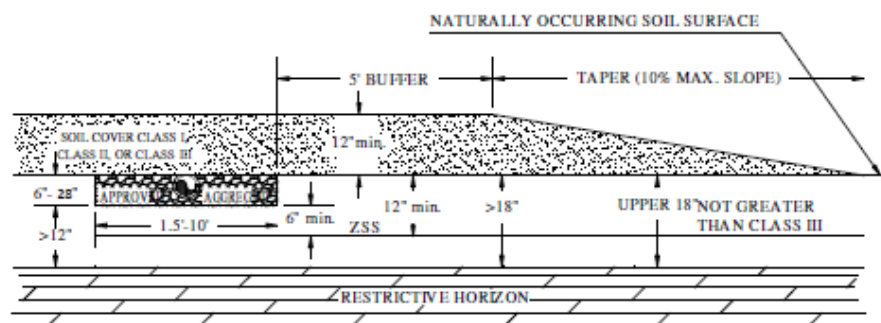

NOT TO SCALE

FACTORS (F) FOR MAINTAINING EQUIVALENT INFILTRATIVE SURFACE AREA

TRENCH WIDTH (ft.)	AGGREGATE DEPTH (in.)					
	6" *	9" **	14"	20"	24"	28"
1.5'	2.39	1.94	USE LTAR STANDARD	1.10	0.97	0.87
2.0'	1.99	1.66	USE LTAR STANDARD	1.00	0.89	0.80
2.5'	1.71	1.46	USE LTAR STANDARD	0.91	0.82	0.75
3.0'	1.50	1.30	USE LTAR STANDARD	0.84	0.76	0.70 <small>see system 360/380</small>
4.0'	1.20	1.06	0.84	0.73	0.67	0.62
5.0'	1.00	0.89	0.73	0.64	0.59	0.55
6.0'	0.85	0.78	0.64	0.57	0.53	0.50
7.0'	0.74	0.68	0.57	0.52	0.49	0.46
8.0'	0.66	0.61	0.52	0.47	0.45	0.42
9.0'	0.59	0.55	0.47	0.43	0.41	0.39
10.0'	0.54	0.51	0.43	0.40	0.38	0.36

$$F = \frac{5.33 \text{ sqft. / ft}}{2 (\text{SwD} / 12) + \text{TW}}$$

* Factors (F) reflect 12% increase
** Factors (F) reflect 9% increase
(See notes in text)

Where, 5.33 sqft/ft = total infiltrative surface area per linear foot of conventional type trench (36in. wide, 14in. deep)

SwD = Side Wall Depth (in)

TW = Trench Width (ft.)

Rev. 03/09/18

~~410 APPENDIX J SYSTEM STANDARD 370/371 SHALLOW PLACEMENT WITH FILL CAP FOR SITES WITH SHALLOW CLASS IV SOIL~~ **Appendix L – System Standard 370/371 – Shallow Placement with Fill Cap for Sites with Shallow Class IV Soil**

~~410.1 SITE/PERMITTING REQUIREMENTS (1) Site/Permitting Requirements~~

~~(1) (a)~~ There must not be a zone of saturation (ZOS) within twelve (12) inches of the naturally occurring soil surface.

~~(2) (b)~~ The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(3) This system must not be utilized on sites that require serial distribution. Level installations on slightly sloping sites can be considered if it can be demonstrated that the entire installation (i.e., side wall to side wall and end to end) will meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons.~~

~~(4) (c)~~ No part of this system can be installed within one hundred twenty-five (125) feet of the ordinary high water elevation within the banks of environmentally sensitive waters.

~~(5) (d)~~ This system may be considered for installation on contiguous lots in new subdivisions approved after the effective date of this standard provided a setback of at least seventy-five (75) feet is maintained between the system and all adjacent property lines. The seventy-five (75) foot setback shall be measured from the point at which the fill cap taper intersects with the naturally occurring soil surface.

~~(6) (e)~~ This system cannot be considered for facilities with peak sewage flow rates in excess of four hundred eighty (480) ~~gallons per day~~ gpd. In addition, this system shall not be considered for facilities requiring grease traps.

~~(7) (f)~~ There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. ~~-This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of R-61-56~~ this regulation.

~~(8) (g) The Long Term Acceptance Rate~~ long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~410.2 INSTALLATION REQUIREMENTS (2) Installation Requirements~~

~~(1) This system cannot utilize serial distribution.~~

~~(2) (a)~~ Effluent discharged to this system must receive a higher degree of treatment than that provided by a conventional septic tank ~~(i.e., e.g. two (2) compartment septic tank or two (2) septic tanks in series).~~

~~(3) (b)~~ Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(4) (c)~~ The required fill cap must extend at least five (5) feet beyond the limits of the wastewater infiltration trenches, and it must taper to the original soil surface at a slope not to exceed ten (10) percent

~~(see attached sketch).~~ -The required seventy-five (75) ~~feet~~foot property line setback shall be measured from the point at which the fill cap taper intersects with the naturally occurring soil surface.

~~(5)~~ (d) The required fill material must be soil texture Class I, Class II₁ or Class III and be void of extraneous debris such as organic matter, building materials, etc.

~~(6)~~ (e) The depth of the fill cap shall provide a minimum of twelve (12) inches backfill above the top of the wastewater infiltration trench aggregate.

~~(7)~~ (f) The wastewater infiltration trench width shall be thirty-six (36) inches.

~~(8)~~ (g) All tree and brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~(9)~~ The following criteria shall be utilized in the selection and design of these systems:

Depth to ZOS (Inches)	Depth to Class IV Soil (Inches)	Amount of Imported Fill Cap/Aggregate Depth (Inches)	Extension Factor
12	18	12/6	1.5
13	17	12/6	1.5
14	16	12/6	1.5
15	15	12/9	1.3
16	14	12/9	1.3
17	13	12/9	1.3
18	12	12/9	1.3
19	11	12/9	1.3
20	10	12/9	1.3

Note: refer to the design sketch (typical) for detail.

~~410.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) The septic tank and fill cap area shall be backfilled and shaped to promote the runoff of surface water.

~~(2)~~ (b) Where natural surface drainage does not exist, a swale shall be constructed adjacent to the filled area to divert surface water away from the onsite wastewater system to a positive outfall. -The installation of ditches, curtain drains, and rain gutters may be required to intercept and divert water away from the onsite wastewater system location.

~~(3)~~ (c) A barrier to preclude parking and vehicular traffic over the system area may be required.

~~(4)~~ (d) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(5)~~ (e) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
SHALLOW PLACEMENT SYSTEM WITH FILL CAP FOR SITES WITH SHALLOW CLASS IV SOILS

PROGRAM 362 / CODE 370 / CODE 371 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

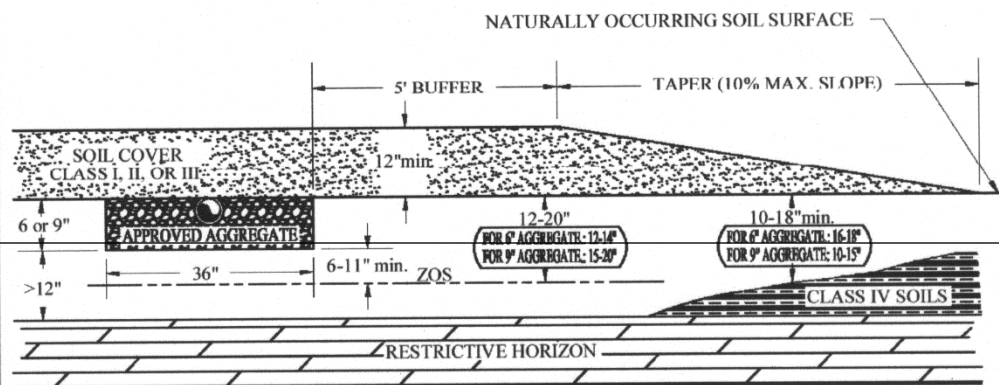

Depth to ZOS (in)	Depth to Class IV Soil (in)	Amount of Imported Fill Cap / Aggregate Depth (in)	Extension Factor
12	18	12 / 6	1.5
13	17	12 / 6	1.5
14	16	12 / 6	1.5
---	---	---	---
15	15	12 / 9	1.3
16	14	12 / 9	1.3
17	13	12 / 9	1.3
18	12	12 / 9	1.3
19	11	12 / 9	1.3
20	10	12 / 9	1.3


NOT TO SCALE

TLS REV. 03/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

ALTERNATIVE STANDARD
SHALLOW PLACEMENT SYSTEM WITH FILL CAP FOR SITES WITH SHALLOW CLASS IV SOILS
PROGRAM 362 / CODE 370 / CODE 371 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

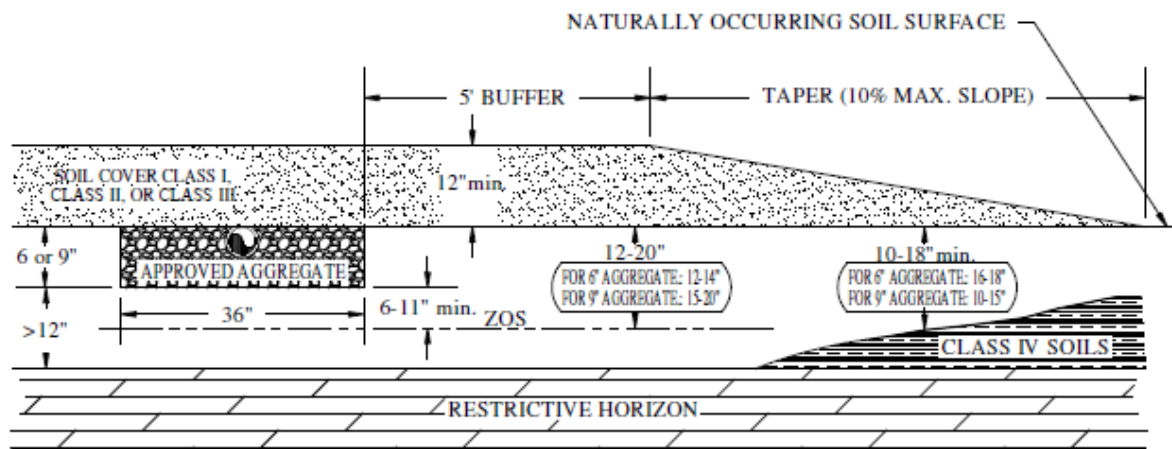

NOT TO SCALE

Depth to ZSS (in)	Depth to Class IV Soil (in)	Amount of Imported Fill Cap / Aggregate Depth (in)	Extension Factor
12	18	12 / 6	1.5
13	17	12 / 6	1.5
14	16	12 / 6	1.5
---	---	---	---
15	15	12 / 9	1.3
16	14	12 / 9	1.3
17	13	12 / 9	1.3
18	12	12 / 9	1.3
19	11	12 / 9	1.3
20	10	12 / 9	1.3

Rev. 03/09/18

~~411 APPENDIX K – System Standard 380/381 – DOUBLE AGGREGATE DEPTH WASTEWATER INFILTRATION TRENCHES~~
Appendix M – System Standard 380/381 – Double Aggregate Depth Wastewater Infiltration Trenches

~~411.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

~~(1)~~ (a) Use of the double aggregate depth option must be restricted to soils that meet all textural limitations and required offsets to the zone of saturation (ZOS) and restrictive horizons.

~~(2)~~ (b) Systems incorporating the double aggregate depth option shall be loaded on the basis of the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(3)~~ (c) In order to maintain the same total absorptive area as that provided by conventional aggregate depth systems, the equivalent linear footage requirement for thirty-six (36) inch wide double aggregate depth trenches shall be determined by multiplying the conventional trench requirement by a factor of 0.7.

~~(4)~~ (d) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration, and shall meet the minimum soil and site conditions of ~~R-61-56~~ this regulation.

~~411.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1)~~ (a) The wastewater infiltration trench aggregate shall be twenty-eight (28) inches in depth, and shall be placed so as to provide twenty (20) inches of aggregate below the pipe, five (5) inches beside the pipe, and three (3) inches above the pipe. -The aggregate shall be covered with at least nine (9) inches of backfill.

~~(2)~~ (b) The wastewater infiltration trench width shall be thirty-six (36) inches.

~~(3)~~ (c) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~411.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) Installation of drainage swales, ditches, curtain drains, and rain gutters may be required to divert or intercept water away from the onsite wastewater system location. -The septic tank and subsurface wastewater infiltration area shall be backfilled and shaped to promote surface water runoff.

~~(2)~~ (b) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(3)~~ (c) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
DOUBLE AGGREGATE DEPTH SOIL ABSORPTION TRENCHES

PROGRAM 360 / CODE 380 / CODE 381 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

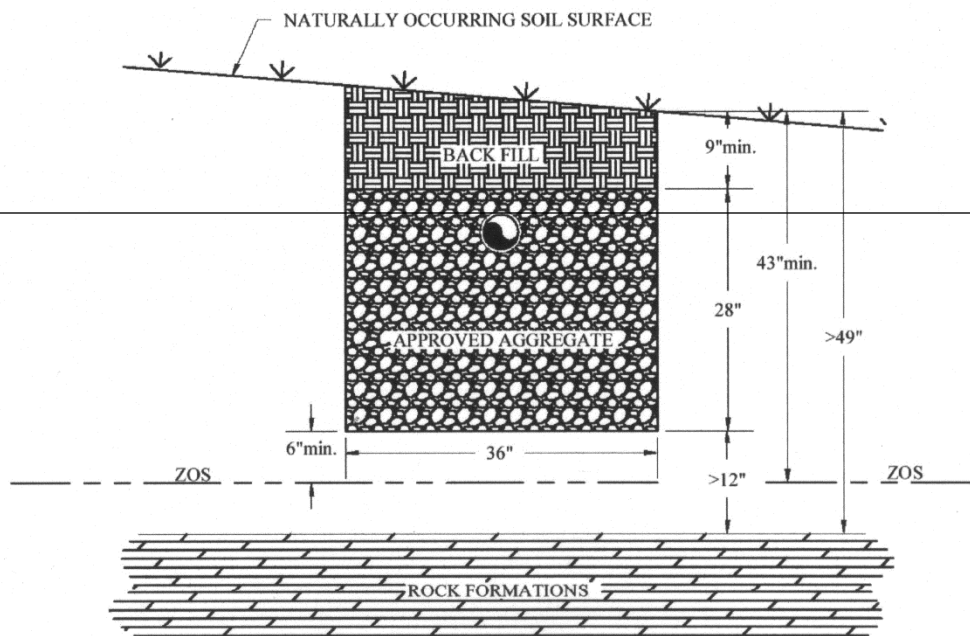

SCALE: 3/4"=1'


TIS REV. 03/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

**ALTERNATIVE STANDARD
DOUBLE AGGREGATE DEPTH SOIL ABSORPTION TRENCHES**

PROGRAM 360 / CODE 380 / CODE 381 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

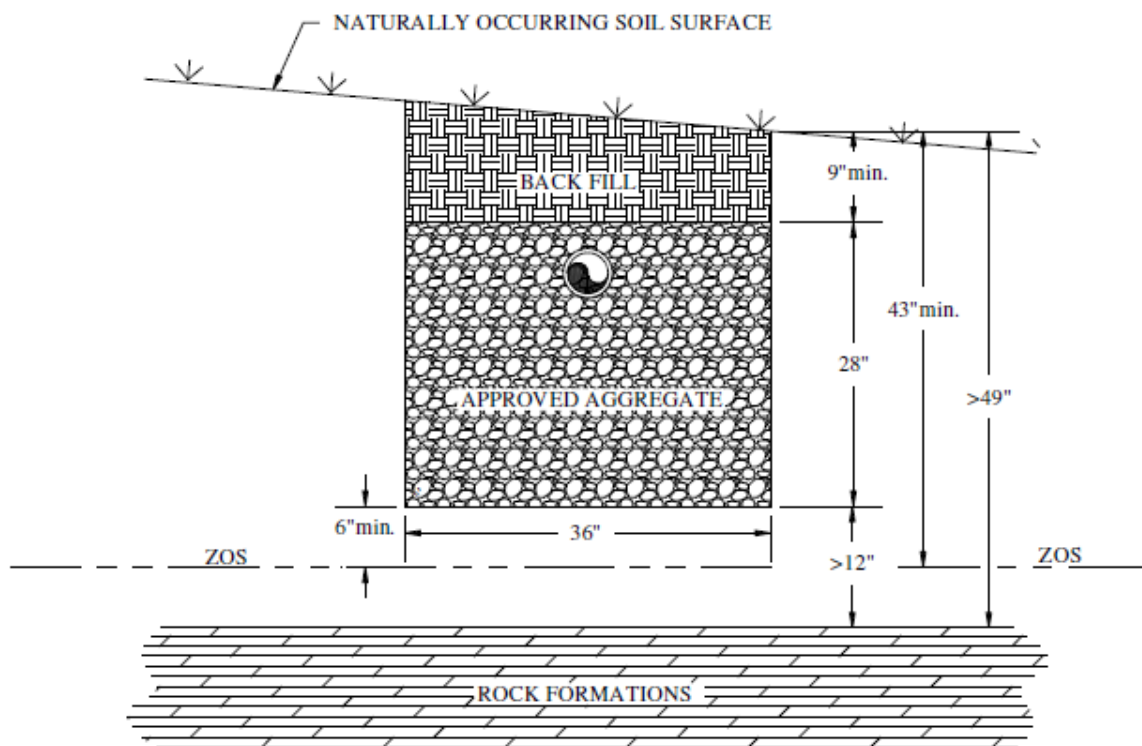

NOT TO SCALE

Rev. 03/09/18

~~412 APPENDIX L – System Standard 420/421 – MOUNDED INFILTRATION SYSTEM~~**Appendix N – System Standard 420/421 – Mounded Infiltration System**

~~412.1 SITE/PERMITTING REQUIREMENTS~~**(1) Site/Permitting Requirements**

~~(1)~~ **(a)** The texture in the upper twelve (12) inches of naturally occurring soil must be Class I or Class II.

~~(2)~~ **(b)** The soil texture in the permeable substratum must be no more limiting than Class II.

~~(3)~~ **(c)** There must not be a zone of saturation (ZOS) within six (6) inches of the naturally occurring soil surface.

~~(4)~~ **(d)** The depth to any restrictive horizon must be greater than twelve (12) inches below the bottom of the proposed wastewater infiltration trenches.

~~(5)~~ **(e)** There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of ~~R. 61-56~~**this regulation**.

~~(6) Prior to permitting the onsite wastewater system, delineation of any affected jurisdictional wetlands may be required. Should any part of the proposed onsite wastewater system be located in jurisdictional wetlands, approval from the appropriate permitting agency(s) (i.e., US Army Corp. of Engineers, SCDHEC OCRM, etc.) shall be received, and proof of such provided to the Department.~~

~~(7)~~ **(f)** No part of this system can be installed within ~~one hundred twenty-five (125)~~ feet of the critical area line or tidal waters as determined by the Department; or within ~~one hundred twenty-five (125)~~ feet of the ordinary high water elevation within the banks of non-tidal, environmentally sensitive waters.

~~(8)~~ **(g)** This system cannot be considered for facilities with peak flow rates in excess of four hundred eighty (480) ~~gallons per day~~**gpd**. In addition, this system shall not be considered for facilities requiring grease traps.

~~(9) This system may not be installed on sites that flood.~~

~~(10)~~ **(h)** This system must not be utilized on sites that require serial distribution. Level installations on ~~slightly~~ sloping sites can be considered if it can be demonstrated that the entire installation (i.e., side wall to side wall and end to end) will meet the required textural limitations and the required offsets to the zone of saturation and restrictive horizons.

~~(11)~~ **(i)** The total linear footage of six (6) inch deep, thirty-six (36) inch wide wastewater infiltration trenches shall be increased by 100 percent over that which would be required for conventional trenches, as determined by the ~~Long Term Acceptance Rate~~**long-term acceptance rate** of the permeable substratum.

~~(12)~~ **(j)** This system may be considered for installation on contiguous lots in new subdivisions approved after the effective date of this standard provided a setback of at least seventy-five (75) feet is maintained between the system and all adjacent property lines. The seventy-five (75) foot setback shall be measured from the point at which the fill cap taper intersects with the naturally occurring soil surface.

~~412.2 INSTALLATION REQUIREMENTS~~**(2) Installation Requirements**

~~(1)~~ (a) Site Preparation

~~(a)~~ (i) The naturally occurring soil surface underlying the area of the wastewater infiltration trenches shall be thoroughly tilled and mixed with the imported medium sand to a depth of six (6) inches.

~~(b)~~ (ii) All tree and brush removal shall be done in a manner that minimizes the disturbance or loss of naturally occurring soil.

~~(2)~~ (b) Fill and System ~~(see ref. sketch)~~

~~(a)~~ (i) The fill cap and buffer shall be Class I, Class II, or Class III.

~~(b)~~ (ii) The depth of the fill cap shall provide a minimum of twelve (12) inches backfill above the top of the wastewater infiltration trench aggregate ~~(see ref. sketch)~~.

~~(c)~~ (iii) Where gravity flow from the septic tank to the subsurface wastewater infiltration area is utilized, the invert elevation of the septic tank outlet shall be installed at an elevation at least equal to or higher than the top of the aggregate in the highest wastewater infiltration trench(es).

~~(d)~~ (iv) The fill buffer shall be at least fifteen (15) feet in width.

~~(e)~~ (v) The fill taper shall be at least twenty (20) feet in width.

~~(f)~~ (vi) The required property line setback shall be measured from the point at which the fill cap taper intersects with the naturally occurring soil surface.

~~(g)~~ (vii) The total fill depth, excluding the taper zone, shall be at least eighteen (18) inches above the naturally occurring soil surface.

~~(h)~~ (viii) The wastewater infiltration trenches shall be installed in a Class I fill pad at least six (6) inches in depth, which extends five (5) feet beyond the trenches in all directions.

~~(i)~~ (ix) The wastewater infiltration trenches require a total aggregate depth of six (6) inches.

~~(j)~~ (x) The wastewater infiltration trench width shall be thirty-six (36) inches.

~~(k)~~ (xi) Infiltration trenches shall penetrate the permeable substratum and shall be at least two (2) feet in width containing USDA medium sand, washed concrete sand, or other material approved by the Department.

~~(l)~~ (xii) Effluent discharged to this system must receive a higher degree of treatment than that provided by a conventional septic tank (~~i.e., e.g.,~~ two (2) compartment septic tank or two (2) septic tanks in series).

~~412.3 FINAL LANDSCAPING AND DRAINAGE~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) The septic tank and fill cap area shall be backfilled and shaped to promote the runoff of surface water.

~~(2)~~ (b) Where natural surface drainage does not exist, a swale shall be constructed adjacent to the filled area to divert surface water away from the onsite wastewater system to a positive outfall. -The installation


of ditches, curtain drains, and rain gutters may be required to intercept and divert water away from the onsite wastewater system location.

~~(3)~~ (c) A barrier to preclude parking and vehicular traffic over the system area may be required.

~~(4)~~ (d) Following final landscaping, seeding or sodding may be required to prevent erosion.

~~(5)~~ (e) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.


ALTERNATIVE STANDARD
MOUNDING INFILTRATION SYSTEM FOR PERMEABLE SANDS UNDERLYING RESTRICTIVE HORIZONS
PROGRAM 362 / CODE 420 / CODE 421 IF PUMPED
TYPICAL DESIGN ILLUSTRATION



**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

ALTERNATIVE STANDARD
MOUNDED INFILTRATION SYSTEM FOR PERMEABLE SANDS UNDERLYING RESTRICTIVE HORIZONS
PROGRAM 362 / CODE 420 / CODE 421 IF PUMPED

TYPICAL DESIGN ILLUSTRATION

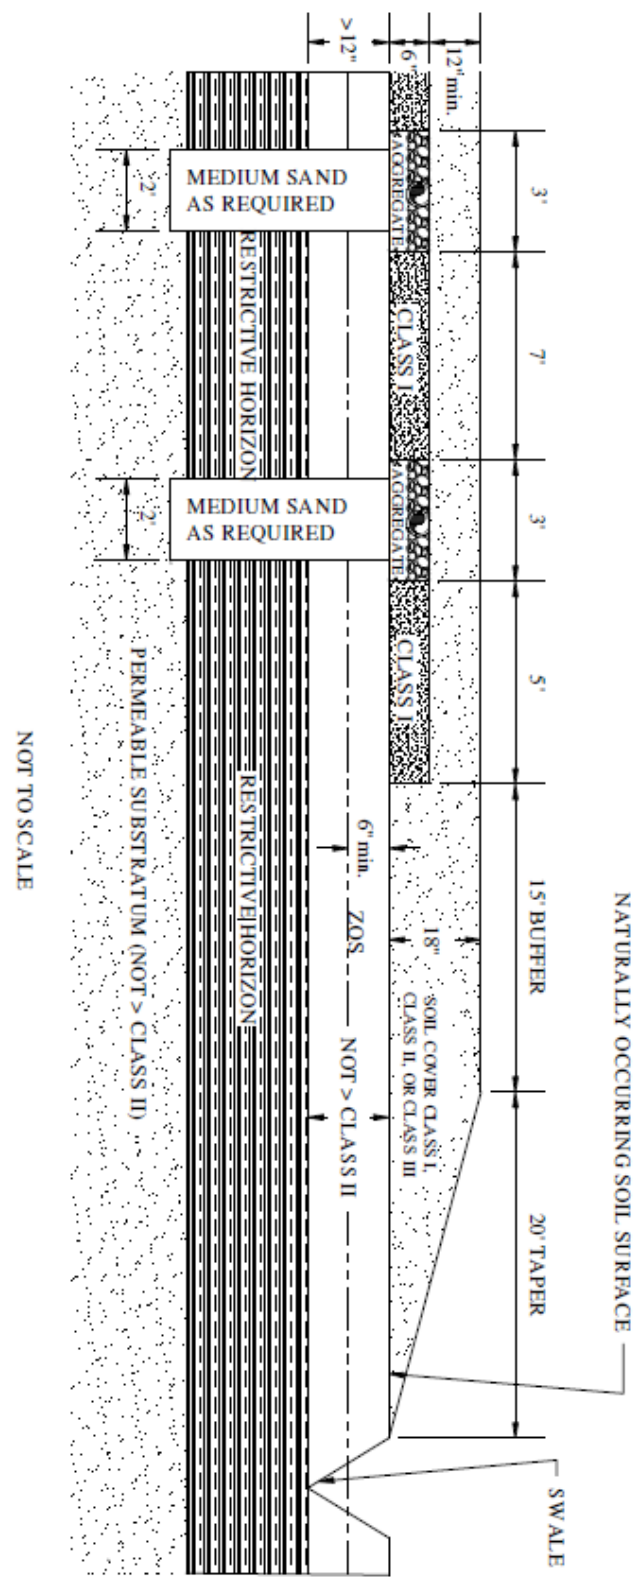

Rev. 03/09/18

~~413 APPENDIX M System Standard 431 MOUNDED FILL SYSTEM~~**Appendix O – System Standard 431 – Mounded Fill System**

~~413.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

- ~~(1) This system shall not be used on sites that are subject to flooding.~~
- ~~(2)~~ (a) The texture in the upper eighteen (18) inches of naturally occurring soil must be Class I or Class II.
- ~~(3)~~ (b) The absorption bed within the mound shall be sized on the ~~Long-Term Acceptance Rate~~ long-term acceptance rate of the most limiting texture in the upper eighteen (18) inches of naturally occurring soil.
- ~~(4)~~ (c) The linear footage of the absorption bed shall be determined in accordance with Standard 270.
- ~~(5)~~ (d) The absorption bed width shall be a minimum of five (5) feet and a maximum of 10 feet.
- ~~(6)~~ (e) Mounded fill systems must not be placed on sites with a slope in excess of three (3) percent.
- ~~(7)~~ (f) No part of this system can be installed within one hundred twenty-five (125) feet of the critical area line or tidal waters as determined by the Department; or within one hundred twenty-five (125) feet of the ordinary high water elevation within the banks of non-tidal, environmentally sensitive waters. -Because of the long buffer, side slope, fill pad, and taper associated with this system, the one hundred twenty-five (125) foot setback shall be measured from the outer edge of the aggregate bed within the mound.
- ~~(8)~~ (g) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of ~~R-61-56~~ this regulation.
- ~~(9) Prior to permitting the onsite wastewater system, delineation of any affected jurisdictional wetlands may be required. Should any part of the proposed onsite wastewater system be located in jurisdictional wetlands, approval from the appropriate permitting agency(s) (i.e., US Army Corp. of Engineers, SCDHEC Ocean and Coastal Resource Management, etc.) shall be received and proof of such provided to the Department.~~
- ~~(10)~~ (h) This system cannot be considered for facilities with peak flow rates in excess of four hundred eighty (480) ~~gallons per day~~ gpd. -In addition, this system shall not be considered for facilities requiring grease traps.
- ~~(11)~~ (i) Effluent discharged to this system must receive a higher degree of treatment than that provided by a conventional septic tank (~~i.e., e.g., two (2) compartment septic tank or two (2) septic tanks in series~~).
- ~~(12)~~ (j) This system may be considered for installation on contiguous lots in new subdivisions approved after the effective date of this standard provided a setback of at least seventy-five (75) feet is maintained between the system and all adjacent property lines. -Because of the long buffer, side slope, fill pad, and taper associated with this system, the seventy-five (75) foot setback shall be measured from the outer edge of the aggregate bed within the mound.

~~413.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1)~~ (a) Site Preparation

~~(a)~~ (i) If present within eighteen (18) inches of the naturally occurring soil surface, organic material and restrictive horizons must be removed from beneath the mound and replaced with USDA medium sand, washed concrete sand, or an equivalent material approved by the Department. -The replacement area must extend five (5) feet in all directions beyond the edges of the aggregate filled absorption bed.

~~(b)~~ (ii) The naturally occurring soil surface underlying the mound shall be thoroughly tilled and mixed with the imported mound fill material to a depth of six (6) inches.

~~(2)~~ (b) Mound/Absorption Bed Requirements

~~(a)~~ (i) Low Pressure Pipe Distribution (LPP) must be utilized to preclude localized hydraulic overloading of the imported fill material and to minimize the impact on the shallow zone of ~~seasonal~~ saturation.

(ii) Low Pressure Pipe Distribution (LPP) must be designed and installed in accordance with Department standards or equivalent designs. The size and layout of each distribution system will vary based on the size of the filter and the needed dosing.

(iii) Pump design shall be in accordance with Department standards.

~~(b)~~ (iv) There must be at least twenty-four (24) inches of medium sand placed between the naturally occurring soil surface and the bottom of the absorption bed. ~~Also, the~~ The bottom surface of the absorption bed must be placed at least twenty-four (24) inches above the zone of saturation.

~~(c)~~ (v) If the slope of the site in the proposed mound area is one (1) percent or less, then the mound shall be placed on a twelve (12) inch fill pad which must extend twenty (20) feet beyond the mound in all directions. If the slope of the site in the proposed mound area is greater than one (1) percent but less than or equal to three (3) percent, then the mound shall be placed on a twelve (12) inch deep fill pad which must extend twenty (20) feet beyond the mound area on the sides of the mound; forty (40) feet beyond the mound area on the down-slope side of the mound; with no fill pad required on the upslope side of the mound.

~~(d)~~ (vi) The mound and fill pad material shall be USDA medium sand, washed concrete sand, or other equivalent material approved by the Department.

~~(e)~~ (vii) The depth of the fill cap material above the absorption bed shall be nine (9) to fifteen (15) inches of soil texture Class II or Class III. -Sod may be substituted for four (4) inches of this portion of the fill cap material. ~~(see attached illustration).~~

~~(f)~~ (viii) The depth of the fill cap material above the mound side-slope, the twelve (12) inch deep fill pad, and the taper shall be at least four (4) inches of soil texture Class II or Class III. -Sod may be substituted for this portion of the fill cap material. ~~(see attached illustration).~~

~~(g)~~ (ix) A 1:2 maximum slope is required if the mound side-slope and taper are sodded.

~~(h)~~ (x) A 1:4 maximum slope is required if the mound side-slope and taper are mulched and seeded.

~~(3) Final Landscaping And Drainage Requirements~~ Final Landscaping and Drainage

(a) The septic tank and mound area shall be backfilled and shaped to promote the runoff of surface water.

(b) Where natural surface drainage does not exist, a swale shall be constructed adjacent to the filled area to divert surface water away from the onsite wastewater system to a positive outfall. The installation of ditches, curtain drains, and rain gutters may be required to intercept and divert water away from the onsite wastewater system location.

(c) A barrier to preclude parking and vehicular traffic over the system area may be required.


(d) Following final landscaping, seeding, or sodding may be required to prevent erosion.

(e) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
MOUNDED FILL SYSTEMS
PROGRAM 362 / CODE 431

TYPICAL DESIGN ILLUSTRATION

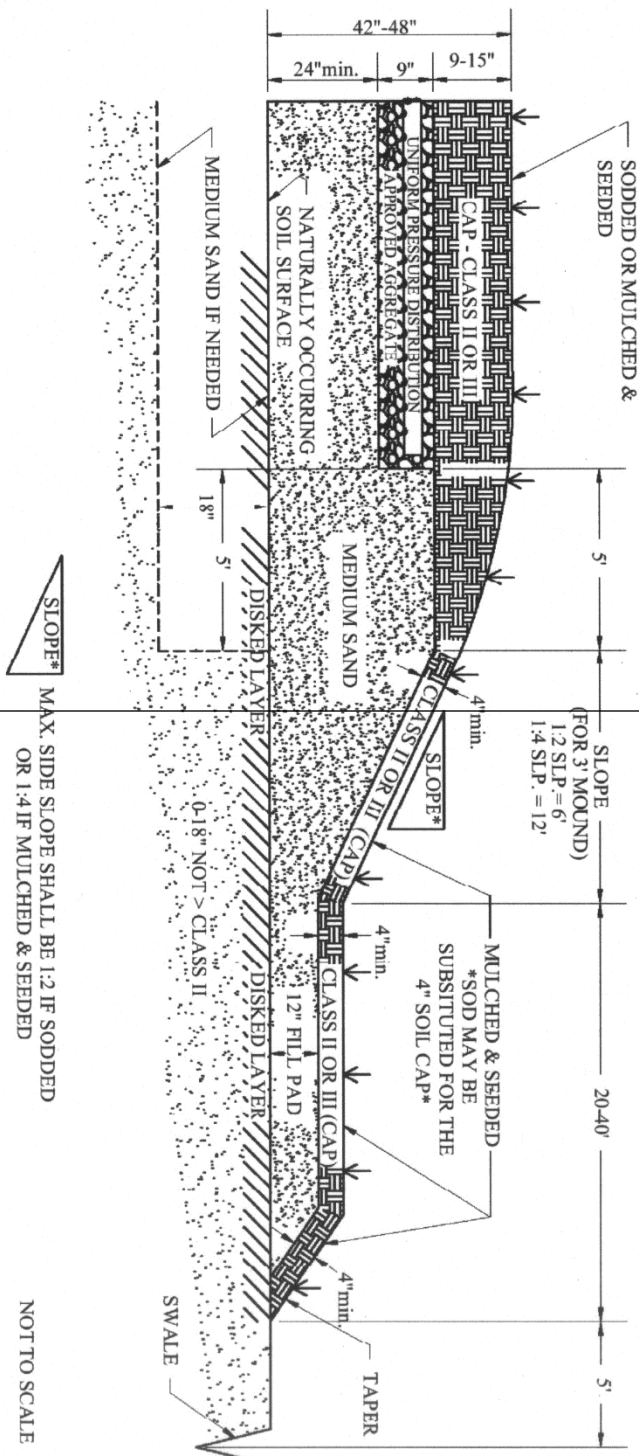

NOT TO SCALE


TLS REV. 03/1997

Rev. 03/09/18

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES

ALTERNATIVE STANDARD
MOUND FILL SYSTEMS
PROGRAM 362 / CODE 431

TYPICAL DESIGN ILLUSTRATION B

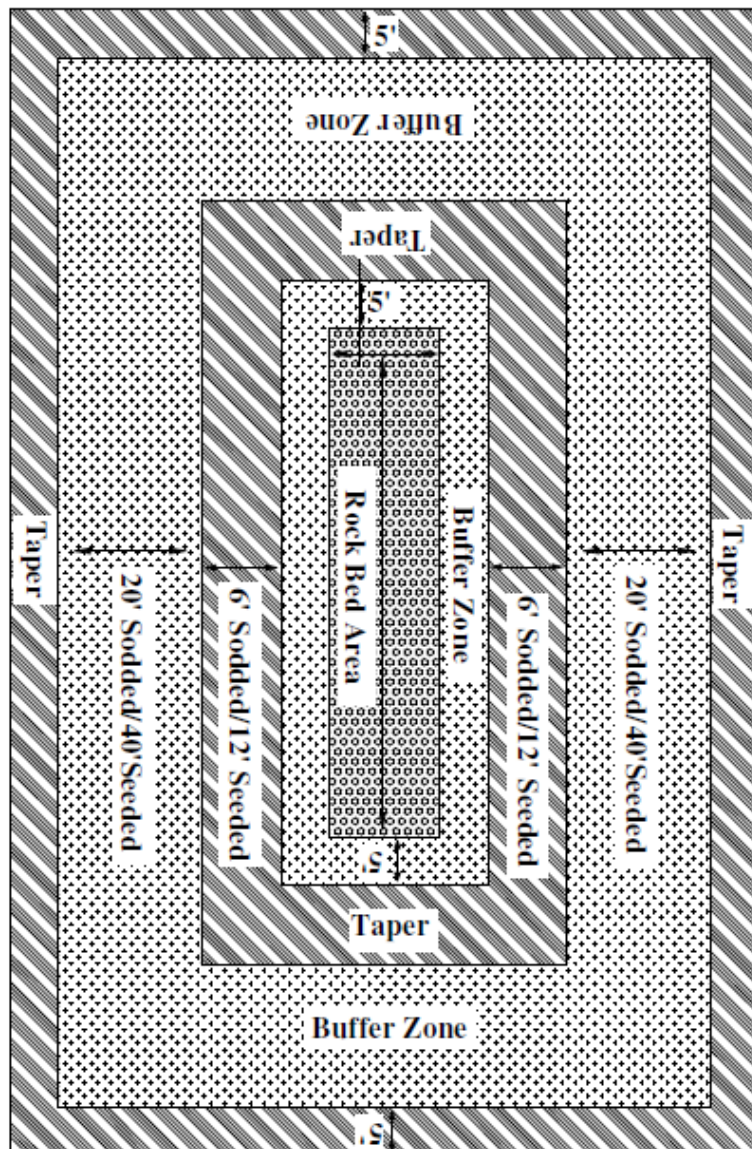


NOT TO SCALE

Rev. 03/09/18

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES

ALTERNATIVE STANDARD
MOUND FILL SYSTEMS
PROGRAM 362 / CODE 431
TYPICAL DESIGN ILLUSTRATION C

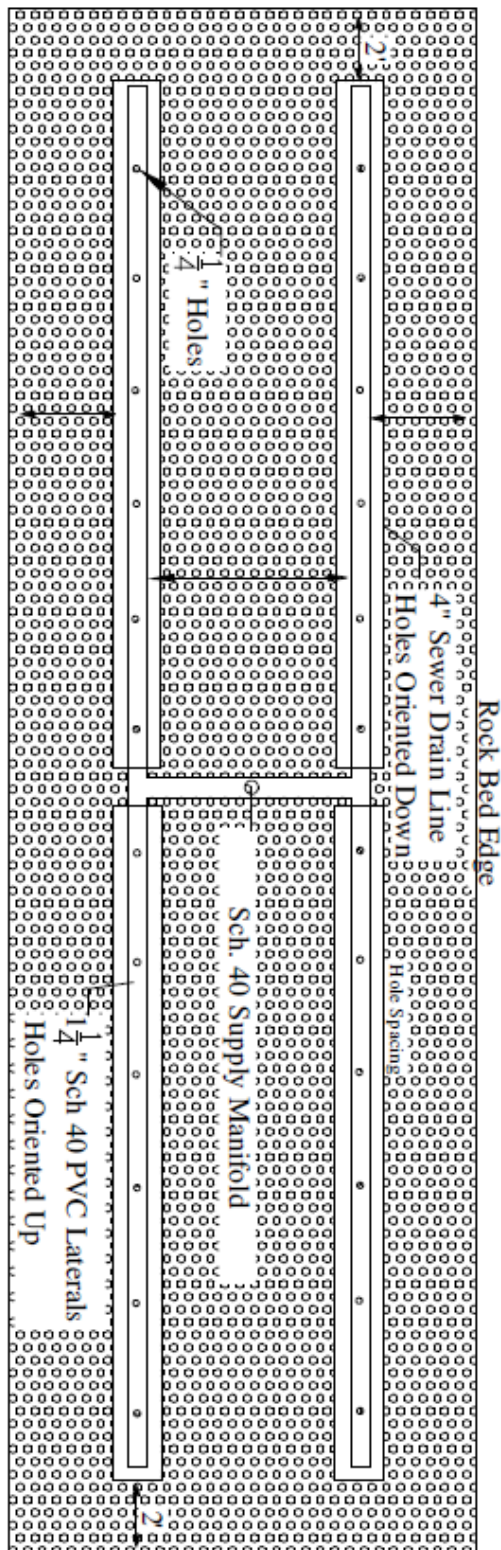

*Note: Cleanouts are required at the end of each lateral to extend to finishing grade with screw-on cleanout caps.

NOT TO SCALE

Rev. 03/09/18

~~414 APPENDIX N – SYSTEM STANDARD 601 – ELEVATED INFILTRATION SYSTEM~~**Appendix P**
– System Standard 601 – Elevated Infiltration System

~~414.1 SITE/PERMITTING REQUIREMENTS~~ (1) Site/Permitting Requirements

~~(1)~~ (a) The texture in the upper eighteen (18) inches of naturally occurring soil must be Class I or Class II.

~~(2)~~ (b) The filter shall not be placed on slopes greater than three (3) percent.

~~(3)~~ (c) This system cannot be considered for facilities with peak flow rates in excess of four hundred eighty (480) ~~gallons per day gpd. In addition, this~~ This system shall not be considered for facilities requiring grease traps.

~~(4)~~ (d) There shall be a buffer of at least fifty (50) feet surrounding and separating the system from all adjacent property lines. This buffer shall be measured from the retaining wall.

~~(5)~~ (e) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. -This area shall have a suitable configuration; and shall meet the minimum soil and site conditions of ~~R-61-56~~ this regulation.

~~(6) This system shall not be placed on sites that flood.~~

~~(7)~~ (f) No part of this system can be installed within one hundred twenty-five (125) feet of the critical area line or tidal waters as determined by the Department; or within one hundred twenty-five (125) feet of the ordinary high water elevation within the banks of non-tidal, environmentally sensitive waters.

~~(8) Prior to permitting the onsite wastewater system, delineation of any affected jurisdictional wetlands may be required. Should any part of the proposed onsite wastewater system be located in jurisdictional wetlands, approval from the appropriate permitting agency(s) (i.e., US Army Corp. of Engineers, SCDHEC Ocean and Coastal Resource Management, etc.) shall be received, and proof of such provided to the Department. The absorption bed shall be sized on the most limiting soil texture class in the upper eighteen (18) inches of naturally occurring soil.~~

~~(9)~~ (g) The total bottom area of the filter must be increased by fifty (50) percent above that required for conventional trenches.

~~(10)~~ (h) This system may be considered for installation on contiguous lots in new subdivisions approved after the effective date of this standard provided a setback of at least seventy-five (75) feet is maintained between the system and all adjacent property lines. The seventy-five (75) foot setback shall be measured from the point at which the retaining wall intersects the naturally occurring soil surface.

~~414.2 INSTALLATION REQUIREMENTS~~ (2) Installation Requirements

~~(1)~~ (a) Site Preparation

~~(a)~~ (i) If present within eighteen (18) inches of the naturally occurring soil surface, organic material and restrictive horizons must be removed from beneath the filter and replaced with USDA medium sand, washed concrete sand, or an equivalent material approved by the Department.

~~(b)~~ (ii) The naturally occurring soil surface underlying the filter shall be thoroughly tilled and mixed with the imported filter material to a depth of six (6) inches.

~~(2)~~ (b) System Requirements

~~(a)~~ (i) The filter must be constructed to a height of at least thirty-six (36) inches above the original grade, with the sewage effluent passing through at least twenty-four (24) inches of filter material.

~~(b)~~ (ii) The filter material shall be USDA medium sand, washed concrete sand, or other material approved by the Department.

~~(c)~~ (iii) The filter retaining wall shall extend at least four (4) inches above the surface of the filter material and shall penetrate the naturally occurring soil surface at least four (4) inches.

~~(d)~~ (iv) The filter retaining wall shall be constructed in accordance with the accompanying design illustrations.

~~(e)~~ (v) Effluent discharged to this system must receive a higher degree of treatment than that provided by a conventional septic tank (~~i.e., e.g.,~~ two (2) compartment septic tank or two (2) septic tanks in series).

~~(f)~~ (vi) The top of the filter shall be capped with Class II or Class III soil, and shall slope from center to edges in order to promote surface runoff.

~~(3)~~ (c) Distribution Requirements

~~(a)~~ (i) Low Pressure Pipe Distribution (LPP) must be utilized to preclude localized hydraulic overloading of the imported fill material and to minimize the impact on the shallow zone of saturation.

(ii) Low Pressure Pipe Distribution (LPP) must be designed and installed in accordance with Department standards or equivalent designs. The size and layout of each distribution system will vary based on the size of the filter and the needed dosing.

~~(b)~~ (iii) Pump design shall be in accordance with Department standards.

~~414.3 FINAL LANDSCAPING AND DRAINAGE REQUIREMENTS~~ (3) Final Landscaping and Drainage

~~(1)~~ (a) Fill material shall be placed around the outside of the filter to a depth of one (1) foot, and shall slope to original grade at a point five (5) feet from the retaining wall.

~~(2)~~ (b) The septic tank and filter area shall be backfilled and shaped to promote the runoff of surface water.

~~(3)~~ (c) Where natural surface drainage does not exist, a swale shall be constructed adjacent to the filter to divert surface water away from the onsite wastewater system to a positive outfall. -The installation of ditches, curtain drains, and/or rain gutters may be required to intercept and divert water away from the onsite wastewater system location.

~~(4)~~ (d) Following final landscaping, seeding or sodding may be required to prevent erosion.


~~(5)~~ (e) Final approval shall be withheld until all landscaping and drainage improvements have been satisfactorily completed.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

ALTERNATIVE SYSTEM
ELEVATED INFILTRATION SYSTEM

PROGRAM 362 / CODE 601

TYPICAL DESIGN ILLUSTRATION

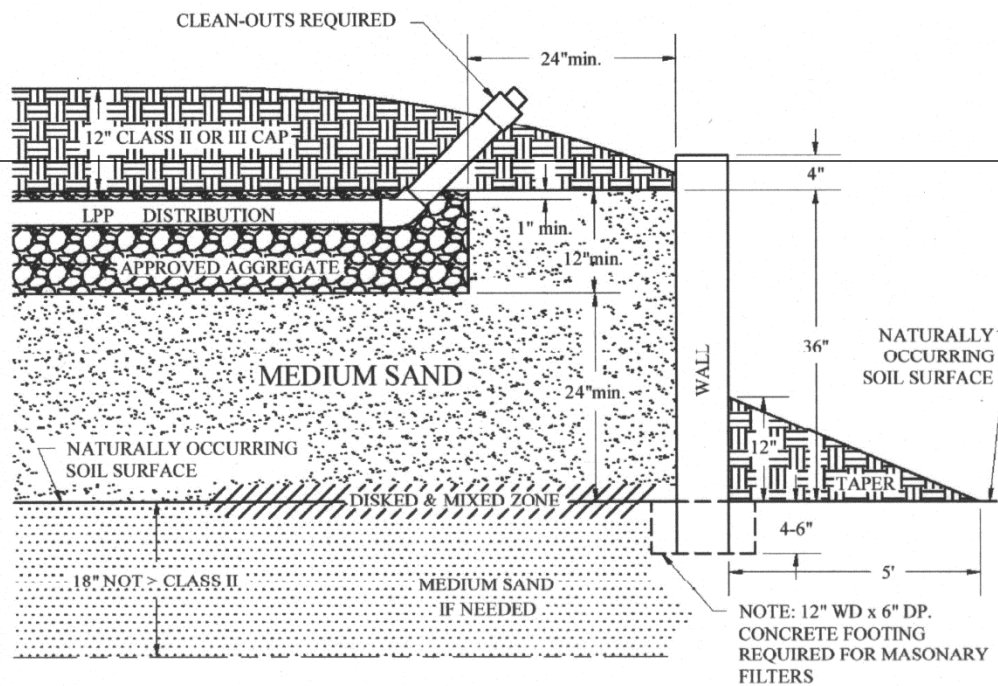

SECTION A-A

NOT TO SCALE


T14 REV. 03/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**


ALTERNATIVE SYSTEM
ELEVATED INFILTRATION SYSTEM

PROGRAM 362 / CODE 601

**TYPICAL DESIGN ILLUSTRATION
CIRCULAR STEEL FILTER DETAILS**

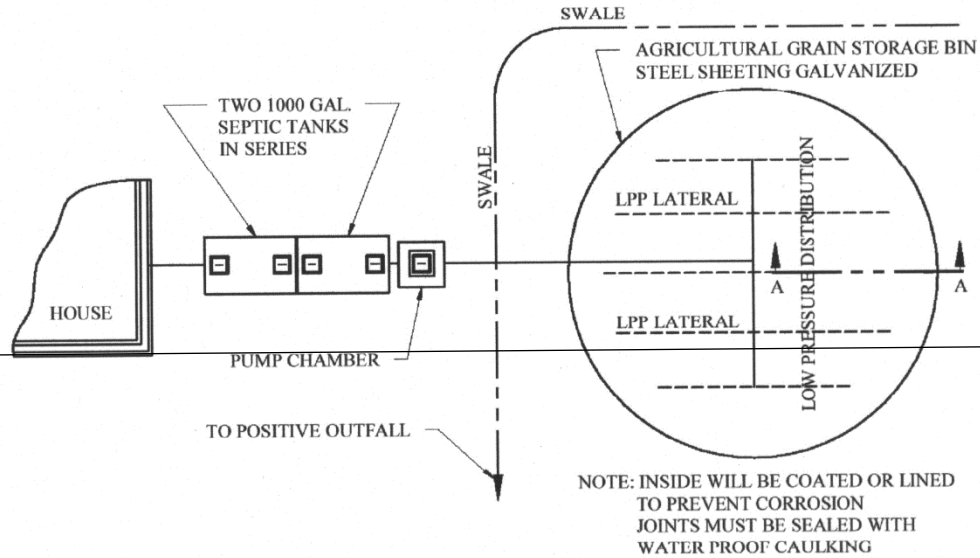

PLAN VIEW
NOT TO SCALE

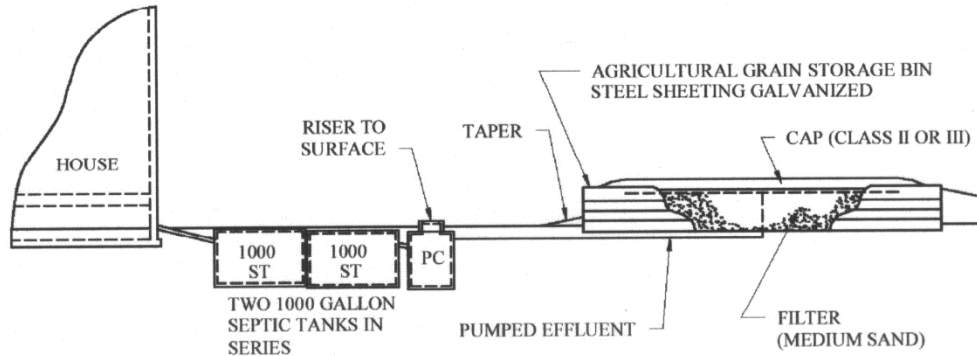

ELEVATION
NOT TO SCALE


TIS REV. 03/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**


ALTERNATIVE SYSTEM
ELEVATED INFILTRATION SYSTEM

PROGRAM 362 / CODE 601

**TYPICAL DESIGN ILLUSTRATION
SQUARE CONCRETE & BLOCK FILTER DETAILS**

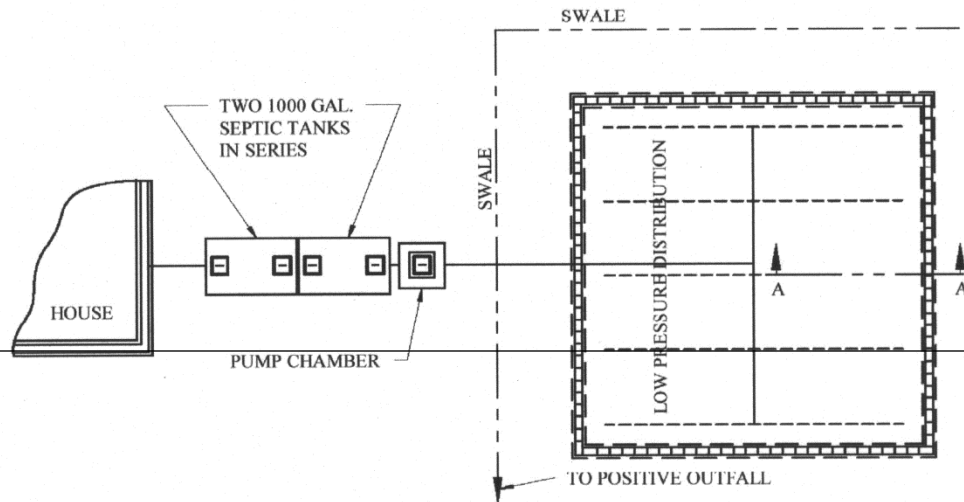

PLAN VIEW
NOT TO SCALE

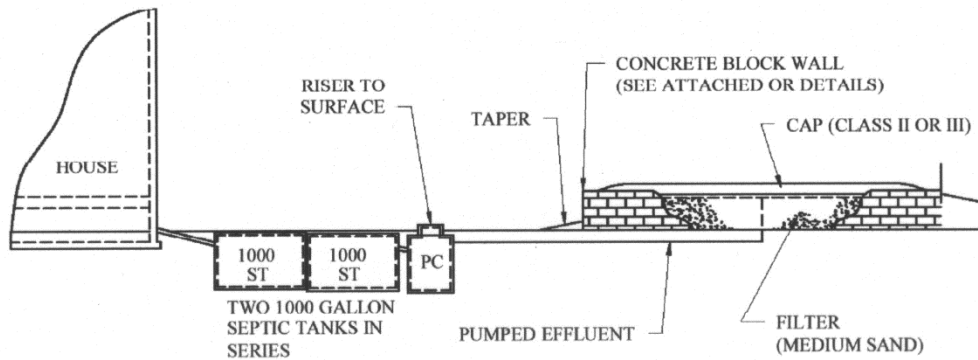

ELEVATION
NOT TO SCALE

TLS REV. 05/16/07

SQUARE CONCRETE & BLOCK FILTER - WALL & FOUNDATION DETAIL




TLS REV. 03/16/07

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**


**ALTERNATIVE STANDARD
ELEVATED INFILTRATION SYSTEM**

PROGRAM 362 / CODE 601

TYPICAL DESIGN ILLUSTRATION - FIGURE A
SQUARE CONCRETE & BLOCK FILTER DETAILS

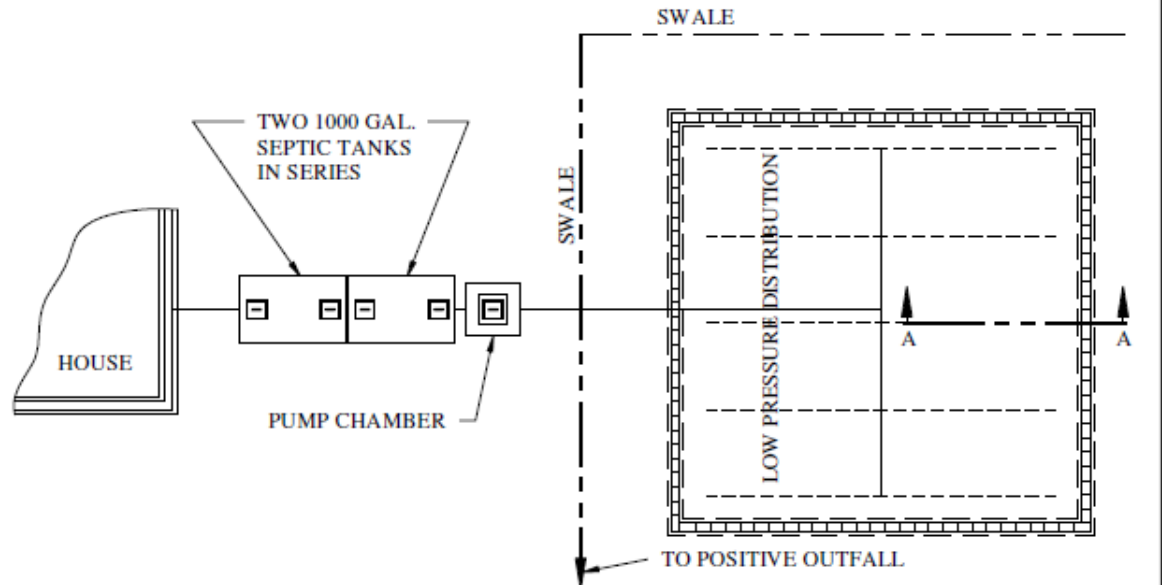

PLAN VIEW
NOT TO SCALE

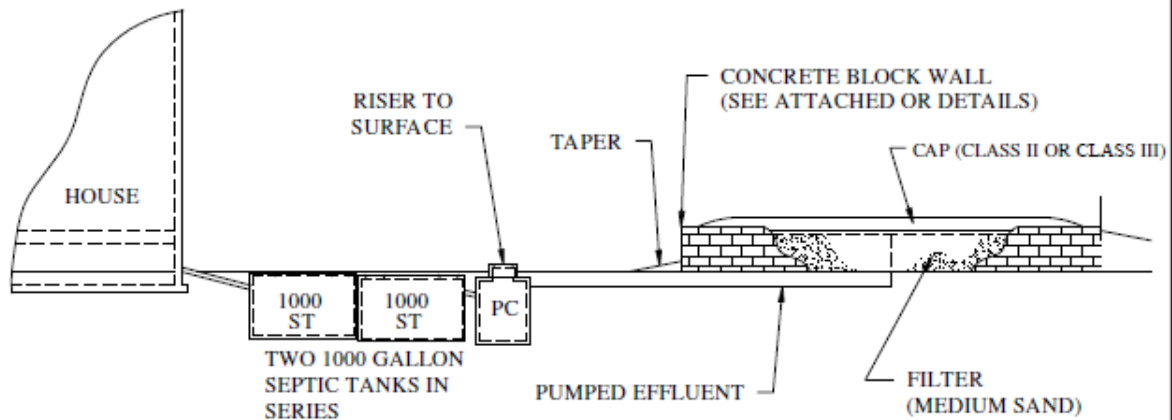

ELEVATION
NOT TO SCALE


Rev. 03/09/18

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**


ALTERNATIVE STANDARD
ELEVATED INFILTRATION SYSTEM

PROGRAM 362 / CODE 601

TYPICAL DESIGN ILLUSTRATION - FIGURE A
CIRCULAR STEEL FILTER DETAILS

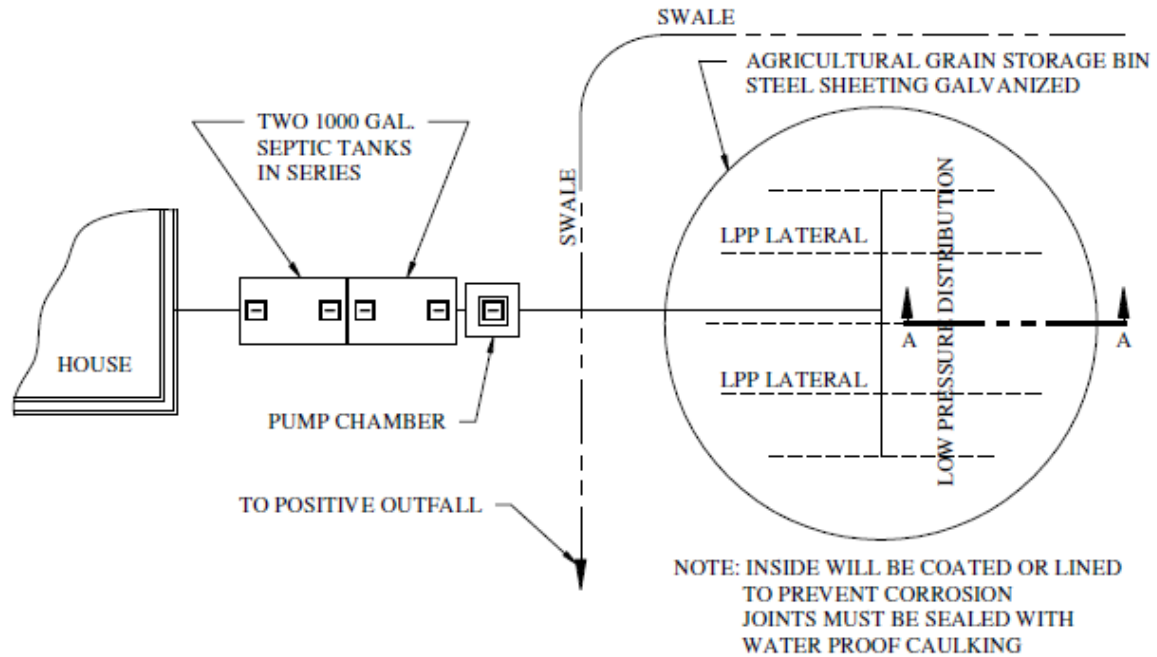

PLAN VIEW
NOT TO SCALE

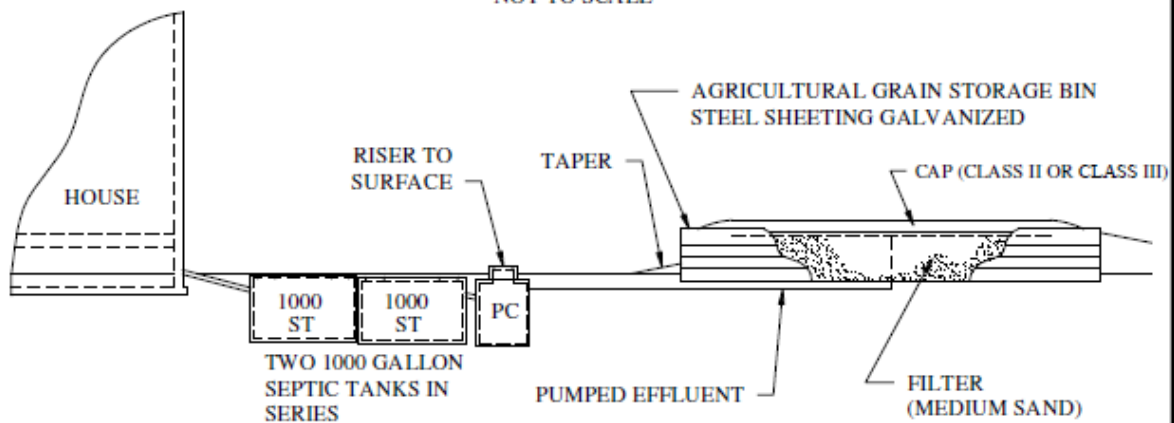

ELEVATION
NOT TO SCALE


Rev. 03/09/18

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

**ALTERNATIVE STANDARD
ELEVATED INFILTRATION SYSTEM**

PROGRAM 362 / CODE 601

TYPICAL DESIGN ILLUSTRATION - FIGURE B
SQUARE CONCRETE & BLOCK FILTER DETAILS

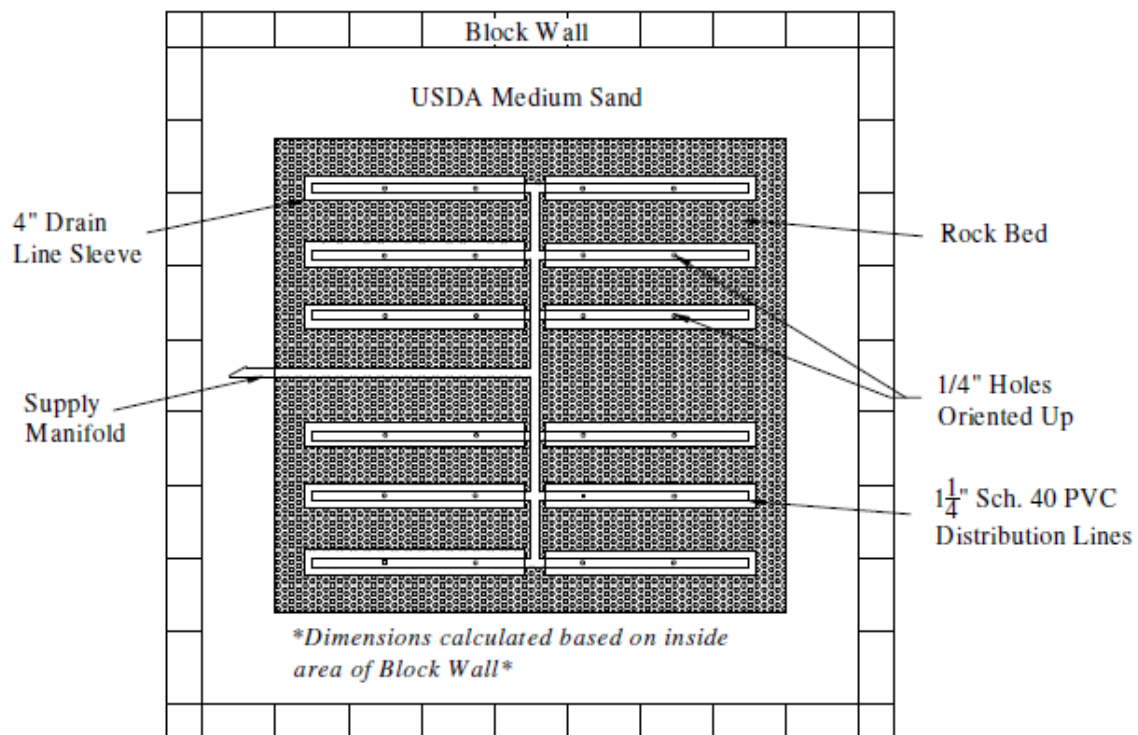

EACH LATERAL TO BE INSTALLED IN A ROCK BED

ALL LATERAL PRESSURE LINES ARE REQUIRED TO HAVE ELBOWS AT THE ENDS OF EACH LINE AND EXTEND TO FINISHING GRADE WITH SCREW-ON CLEANOUT CAPS

ALL HOLES ARE TO BE EQUALLY SPACED FROM ENDS OF EACH LINE AND BETWEEN EACH HOLE

ELEVATION
NOT TO SCALE


Rev. 03/09/18

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

**ALTERNATIVE STANDARD
ELEVATED INFILTRATION SYSTEM**

PROGRAM 362 / CODE 601

**TYPICAL DESIGN ILLUSTRATION - FIGURE B
CIRCULAR STEEL FILTER DETAILS**

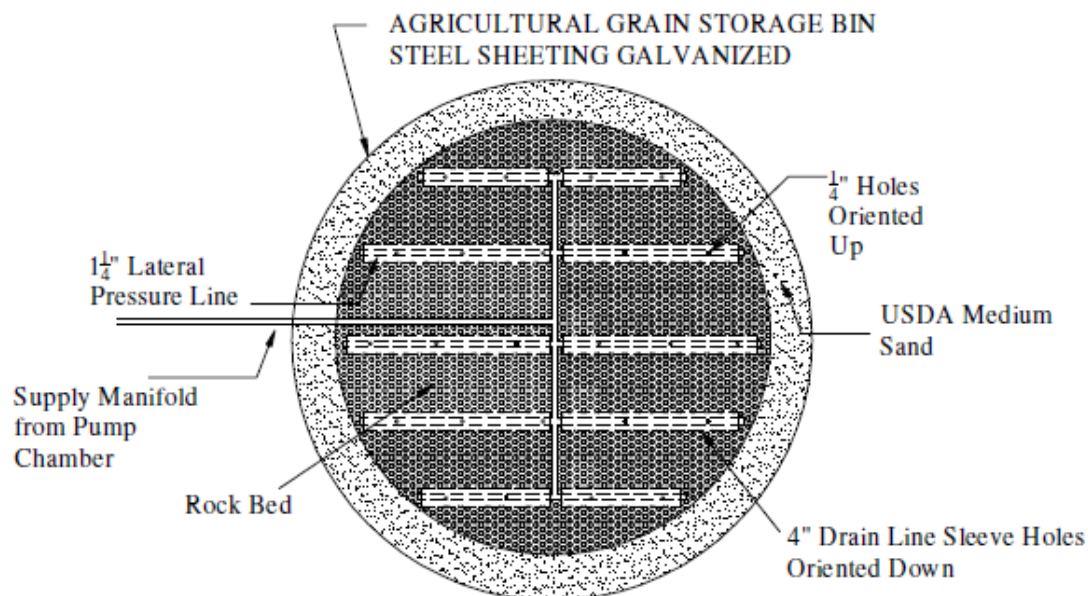

EACH LATERAL TO BE INSTALLED IN A ROCK BED

**ALL LATERAL PRESSURE LINES ARE REQUIRED TO HAVE ELBOWS AT THE
ENDS OF EACH LINE AND EXTEND TO FINISHING GRADE WITH SCREW-ON
CLEANOUT CAPS**

**ALL HOLES ARE TO BE EQUALLY SPACED FROM ENDS OF EACH LINE AND
BETWEEN EACH HOLE**

ELEVATION
NOT TO SCALE


Rev. 03/09/18

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES

ALTERNATIVE STANDARD
ELEVATED INFILTRATION SYSTEM

PROGRAM 362 / CODE 601

TYPICAL DESIGN ILLUSTRATION -FIGURE C

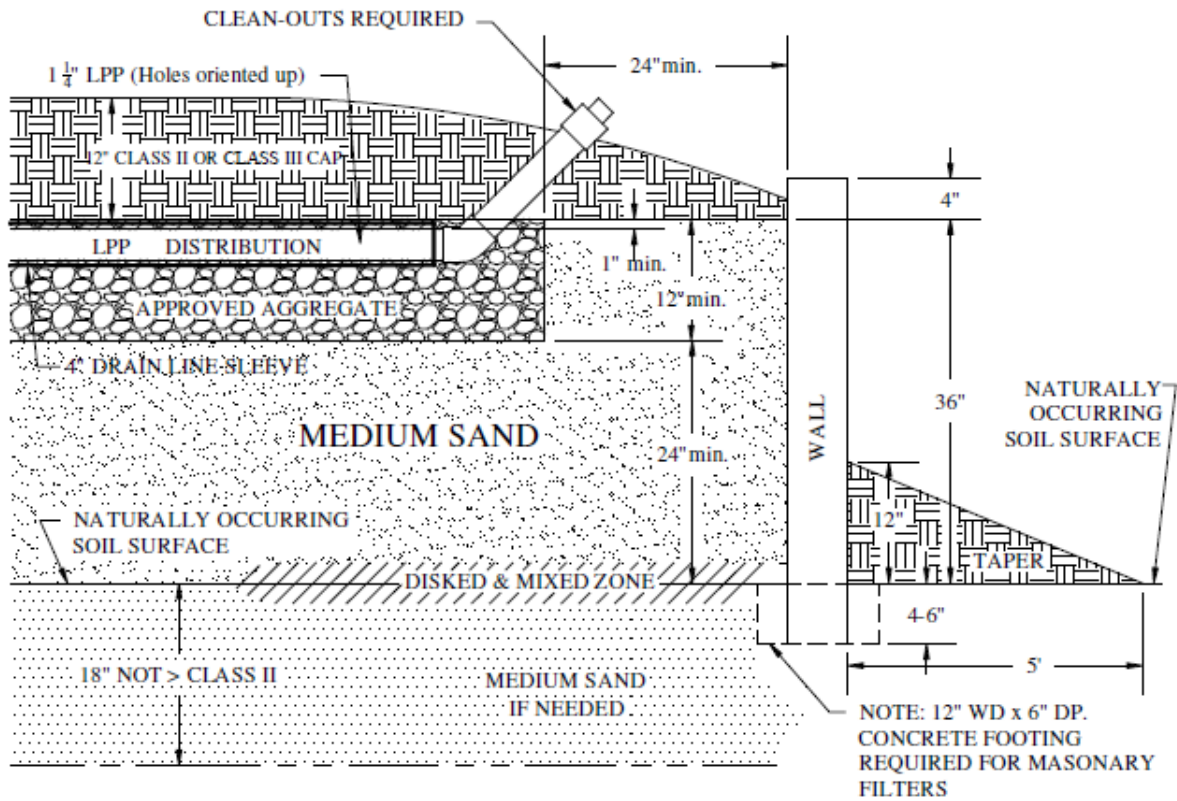

NOT TO SCALE

Rev. 03/09/18

~~415 APPENDIX O – SYSTEM STANDARD 610 – SPECIALIZED ONSITE WASTEWATER SYSTEM DESIGNS (LESS THAN 1500 GPD)~~**Appendix Q – System Standard 610 – Specialized Onsite Wastewater System Designs (less than 1500 gpd)**

(1) Site/Permitting Requirements

~~(1)~~ (a) This Standard shall not apply to the following:

~~(a)~~ (i) Projects where two (2) or more pieces of deeded property will share a common system.

~~(b)~~ (ii) Residential or commercial projects where the individual or combined peak sewage flow is estimated to be in excess of fifteen hundred (1500) gpd.

~~(c)~~ (iii) Projects that discharge wastes containing high amounts of fats, grease and oil, including restaurants and other food service facilities, unless the system manufacturer certifies that the proposed system is designed to treat such high strength wastes.

~~(d)~~ (iv) Industrial process wastewater.

~~(2)~~ (b) A site may be considered for a specialized onsite wastewater system design if written documentation provided by a Registered Professional Engineer licensed in ~~the State of South Carolina~~, including soil studies performed by a Professional Soil Classifier licensed in ~~the State of South Carolina~~, indicates that the proposed system will function satisfactorily and in accordance with all requirements of ~~R.61-56~~this regulation. Such substantiating documentation must include the following:

~~(a)~~ (i) A Soils Report from a Professional Soil Classifier licensed in ~~the State of South Carolina~~ including detailed soil profile descriptions and Soil Series classification(s) utilizing methods and terminology specified in the Field Book for Describing and Sampling Soils; depth to the zone of saturation utilizing methods and terminology outlined in Redoximorphic Features for Identifying Aquic Conditions, and other appropriate principles specified in Soil Taxonomy; the depth to restrictive horizons; and a description of topography and other pertinent land features.

~~(b)~~ Delineation of any affected jurisdictional wetlands, if applicable. Should any part of the proposed onsite wastewater system be located in jurisdictional wetlands, approval from the appropriate permitting agency(s) [i.e., US Army Corps of Engineers, SCDHEC Ocean and Coastal Resource Management] shall accompany the application for a specialized onsite wastewater system design.

(ii) For drain field and replacement areas with a less than fifteen (15) inch zone of saturation, no part of a specialized onsite wastewater system may be installed within one hundred twenty-five (125) feet of the critical area line or tidal waters as determined by the Department or within one hundred twenty-five (125) feet of the ordinary high water elevation within the banks of non-tidal, environmentally sensitive waters.

~~(c)~~ (iii) There shall be a replacement area equivalent to at least fifty (50) percent in size of the original system area held in reserve for system repair. This area shall have a suitable configuration, and shall meet the minimum soil and site conditions of ~~R.61-56~~this regulation.

~~(d)~~ (iv) A plan that has been sealed, signed and dated by a Registered Professional Engineer licensed in ~~the State of South Carolina~~ certifying that the proposed onsite wastewater system has been designed in accordance with the requirements of ~~R.61-56~~this regulation and will function satisfactorily. The plan should

also show an area equivalent to at least fifty (50) percent in size of the original system held in reserve for system repair.

~~(e)~~ (v) The manufacturer's recommendations for operation and maintenance of the system, and the consulting Registered Professional eEngineer's management plan to meet this. For systems that have mechanical components and/or require a higher degree of maintenance to ensure the proper treatment and disposal of Domestic Wastewater, an operation and maintenance (O&M) plan must be developed by the designing Registered Professional Engineer to be given to the party who is ultimately responsible for the operation of the system. O&M plans must be recorded along with the property deed and must run with the land.

~~(3)~~ (c) Any ~~Permit to Construct~~ permit to construct that is issued pursuant to this standard shall be based upon the consulting Registered Professional eEngineer's design, certification, and other supporting documentation provided by the Professional Soil Classifier.

~~(4)~~ (d) The consulting Registered Professional eEngineer shall be responsible for supervising construction of the system and providing the Department with a certified "~~as-built~~" as-built plan of the actual installation containing all details required by the Department. The certified as-built plan must be submitted to the Department within two (2) business days of completing the system installation. If the construction schedule for a specialized system installation is more than forty-eight (48) hours, the Department must be notified in advance of the beginning of construction. Any Final Approval that is released pursuant to this standard shall be based upon this engineering certification.

~~416 APPENDIX P — Curtain Drain Standard~~ **Appendix R – Curtain Drain Standard**

~~416.1 Minimum Construction Requirements~~ (1) Minimum Construction Requirements

~~(1)~~ (a) Only pipe having received written approval from the Department may be utilized in curtain drains. This approval shall be based upon the pipe meeting all applicable ASTM standards.

~~(2)~~ (b) The aggregate used in curtain drains shall be a material approved by the Department, ~~and shall range in size from one half (1/2) inch to two and one half (2 1/2) inches. Fines are prohibited.~~

~~(3)~~ (c) The curtain drain trench utilizing tire chips or gravel or a similar type of Department approved product shall be at least six (6) inches wide.

~~(4)~~ (d) The curtain drain shall be placed ten (10) feet upslope and twenty-five (25) feet down-slope of a subsurface wastewater infiltration area or repair area. ~~Where the aggregate portion of the curtain is installed at the same or lower (down-slope) elevation relative to an adjacent subsurface wastewater infiltration area or repair area, the aggregate portion of the curtain must be a minimum of twenty-five (25) feet from the adjacent the subsurface wastewater infiltration area or repair area.~~

~~(5)~~ (e) The trench bottom shall have a uniform slope to the discharge point. ~~A minimum one (1) percent fall (12 inches per 100 feet) shall be utilized. Trench excavation with a ditch witch is permissible provided the trench bottom has a uniform down-slope gradient.~~

~~(6)~~ (f) The solid discharge (non-aggregate) line shall be fifteen (15) feet from adjacent subsurface wastewater infiltration area or repair area.

~~(7)~~ (g) The down-slope side of the trench toward the subsurface wastewater infiltration area shall have a minimum six (6) mil poly or an equivalent ~~strong~~strength, treated impervious material draped from the trench surface to the trench bottom to prevent groundwater from bridging the curtain drain.

~~(8)~~ (h) Agricultural drainpipe (slitted) with a minimum diameter of four (4) inches shall be placed along the trench bottom in the aggregate portion. Perforated pipe is acceptable, provided the perforations are installed facing either sideways or upward.

~~(9)~~ (i) There shall be at least two (2) inches of aggregate beneath the drainpipe.

~~(10)~~ (j) The aggregate shall be brought to at least six (6) inches from the ground surface.

~~(11)~~ (k) The aggregate shall be covered with a strong, untreated pervious material to prevent infiltration of back fill material.

~~(12)~~ (l) Solid drainpipe with a minimum diameter of four (4) inches shall be placed along the trench bottom from the aggregate to the discharge point.

~~(13)~~ (m) The curtain drain must discharge to the ground surface past the last wastewater infiltration trench line.


~~(14)~~ (n) Rodent barriers on discharge pipe outlet(s) are required.

~~(15)~~ (o) If the curtain drain's trench bottom depth exceeds thirty (30) inches, it shall be inspected prior to the aggregate being installed to ensure proper trench depth and grade. It is acceptable to place the pipe and aggregate in the trench prior to the final inspection when a probe rod inspection port can be used to accurately measure trench bottom depth.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

CURTAIN DRAIN STANDARD

TYPICAL DESIGN SKETCH

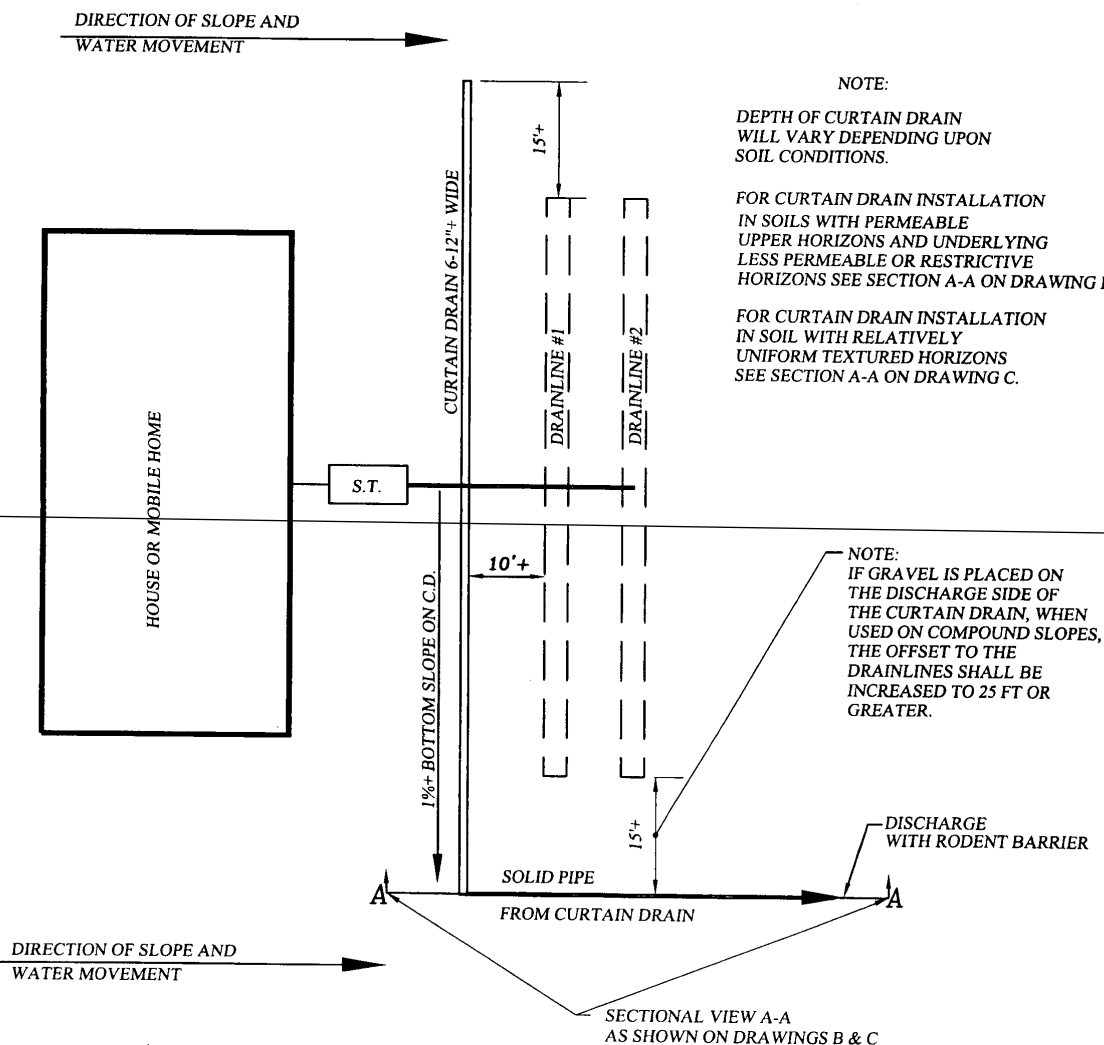


DRAWING A

T.L.S.

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL BUREAU OF ENVIRONMENTAL HEALTH

CURTAIN DRAIN STANDARDS

CURTAIN DRAIN INSTALLATION IN SOILS WITH RESTRICTIVE OR LESS PERMEABLE HORIZONS BELOW THE DRAINFIELD
TYPICAL DESIGN SKETCH

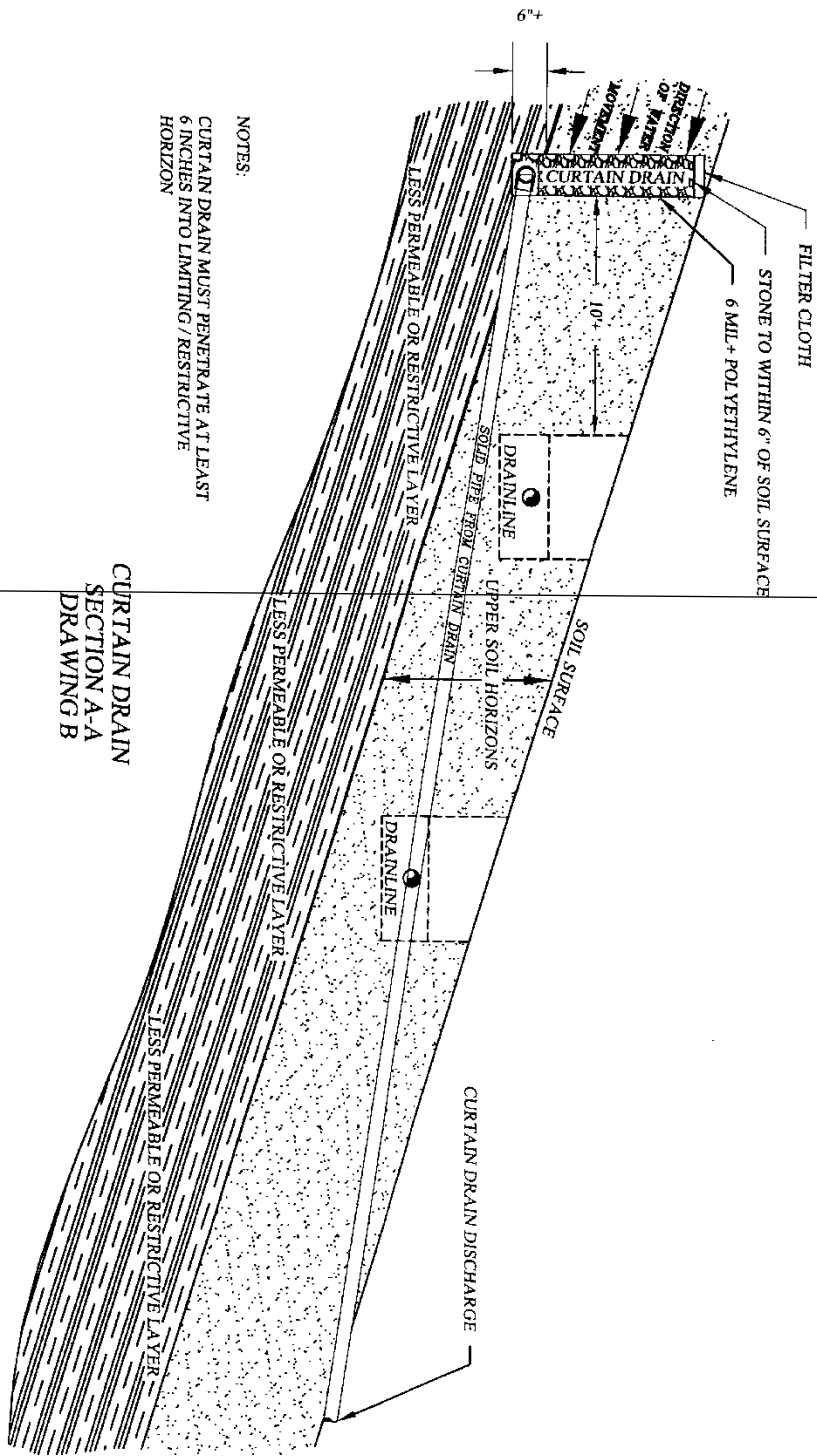

NOTES:
CURTAIN DRAIN MUST PENETRATE AT LEAST
6 INCHES INTO LIMITING / RESTRICTIVE
HORIZON

CURTAIN DRAIN
SECTION A-A
DRAWING B


DRAWING NOT TO SCALE

71.S1

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH**

CURTAIN DRAIN STANDARDS

**CURTAIN DRAIN INSTALLATION IN SOILS WITH RELATIVELY UNIFORM HORIZONS
TYPICAL DESIGN SKETCH**

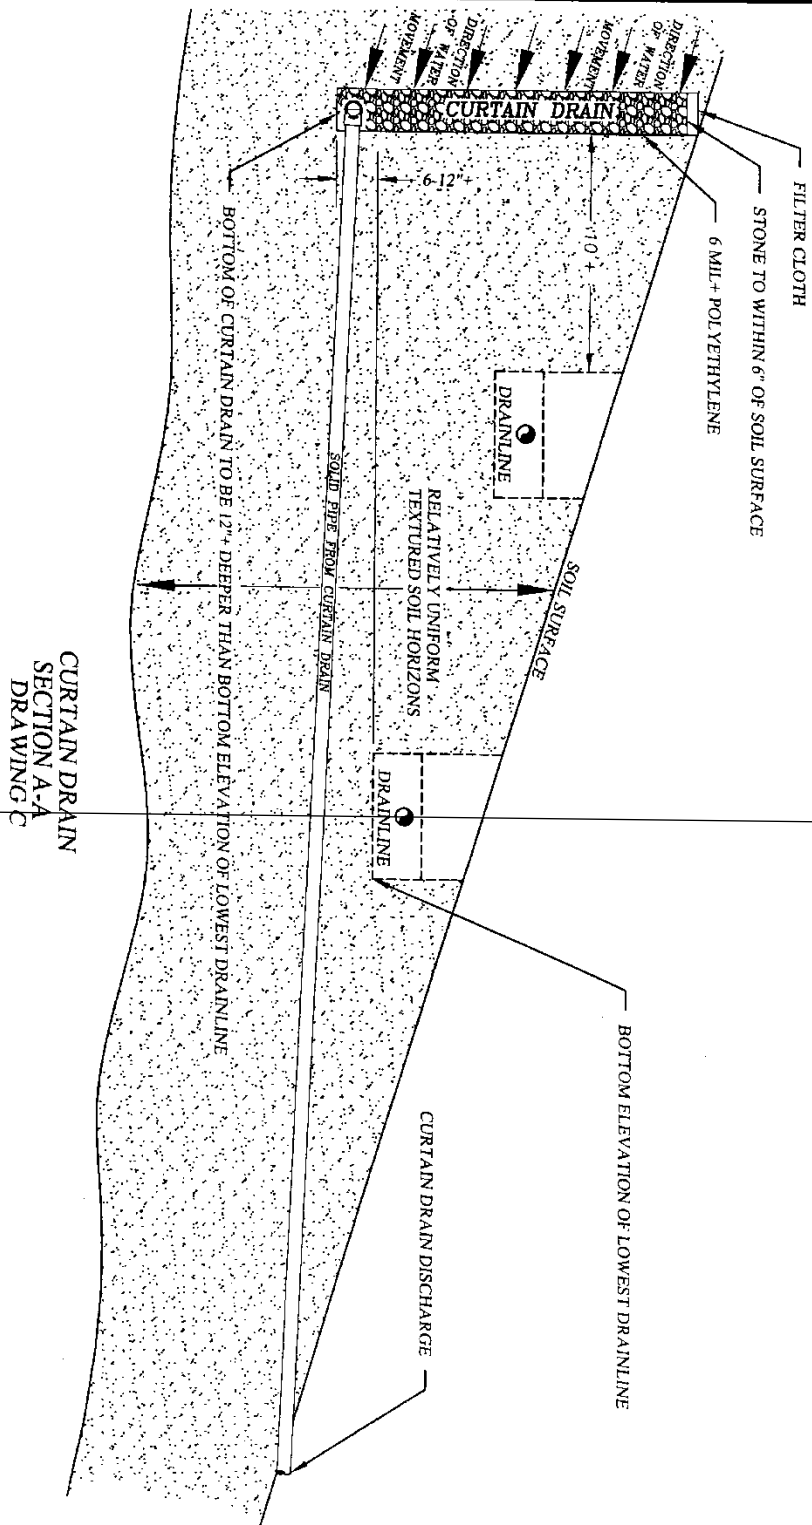


T.L.S.

**SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL
BUREAU OF ENVIRONMENTAL HEALTH SERVICES**

CURTAIN DRAIN STANDARD

TYPICAL DESIGN SKETCH

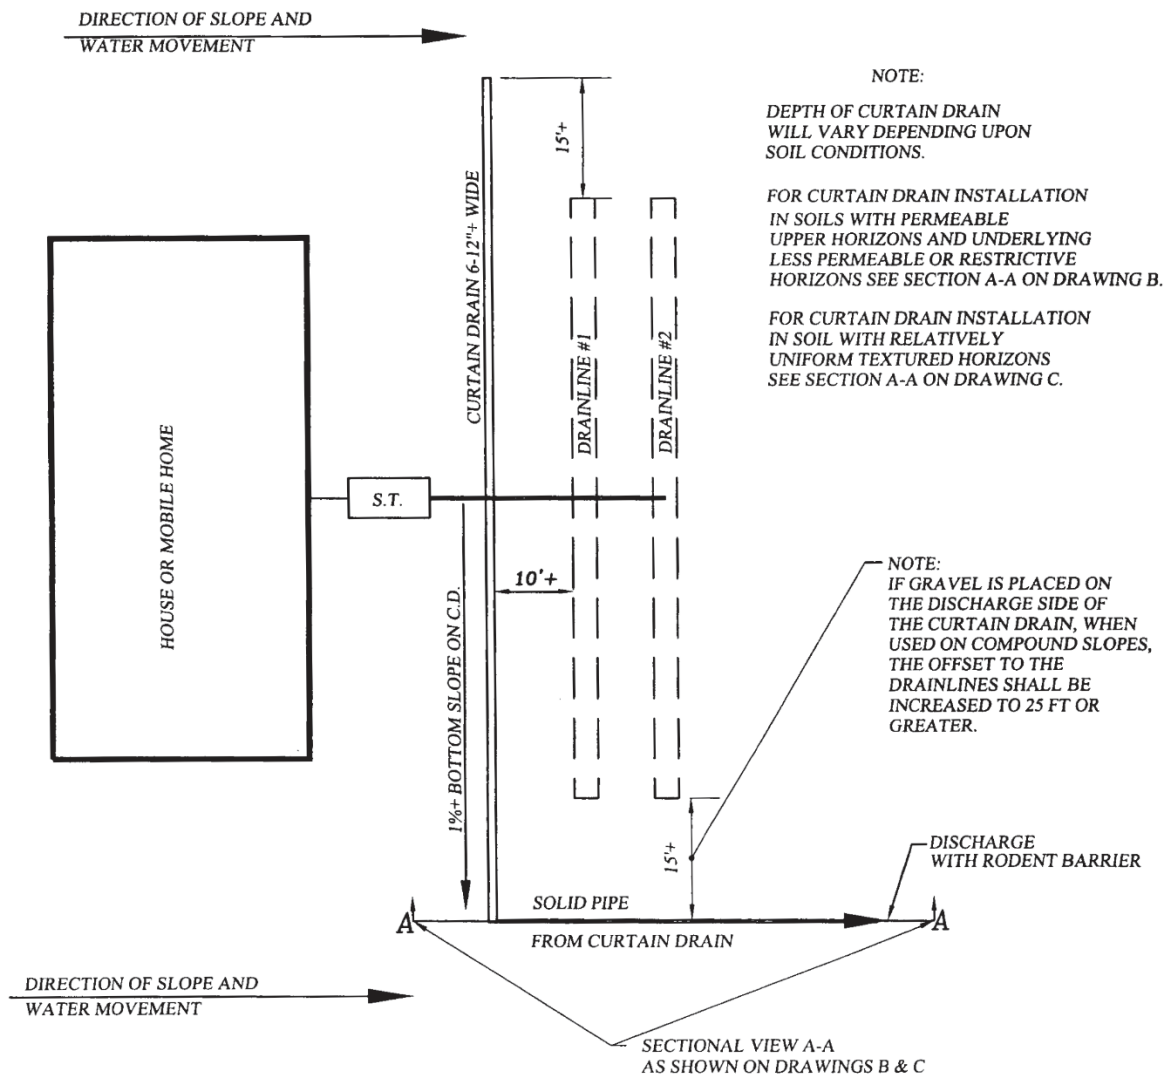

DRAWING A


Rev. 03/09/18

T.L.S.

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL BUREAU OF ENVIRONMENTAL HEALTH SERVICES

CURTAIN DRAIN STANDARDS

CURTAIN DRAIN INSTALLATION IN SOILS WITH RESTRICTIVE OR LESS PERMEABLE HORIZONS BELOW THE DRAINFIELD
TYPICAL DESIGN SKETCH

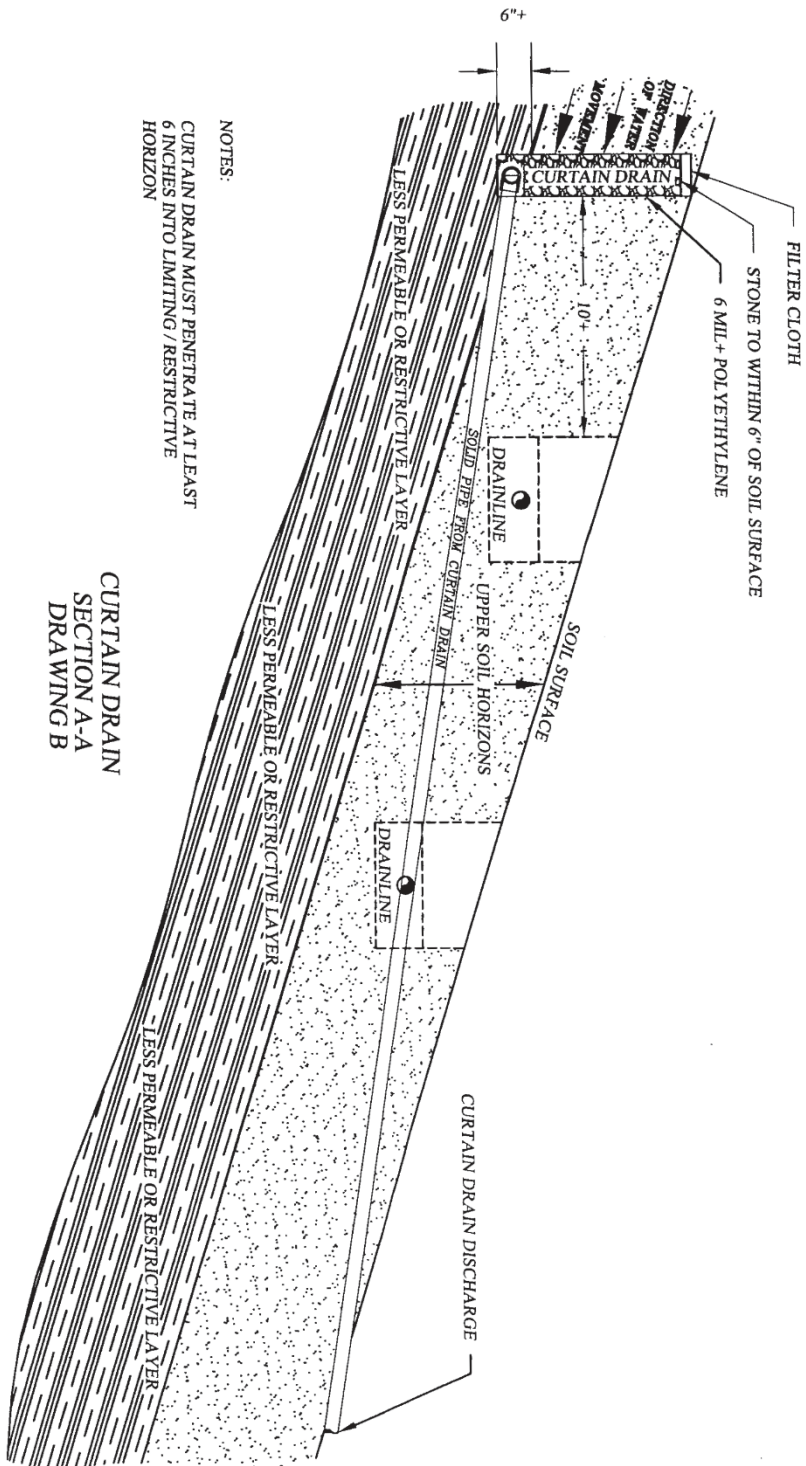


NOTES:
CURTAIN DRAIN MUST PENETRATE AT LEAST
6 INCHES INTO LIMITING / RESTRICTIVE
HORIZON

CURTAIN DRAIN
SECTION A-A
DRAWING B

SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL BUREAU OF ENVIRONMENTAL HEALTH SERVICES

CURTAIN DRAIN STANDARDS

CURTAIN DRAIN INSTALLATION IN SOILS WITH RELATIVELY UNIFORM HORIZONS TYPICAL DESIGN SKETCH

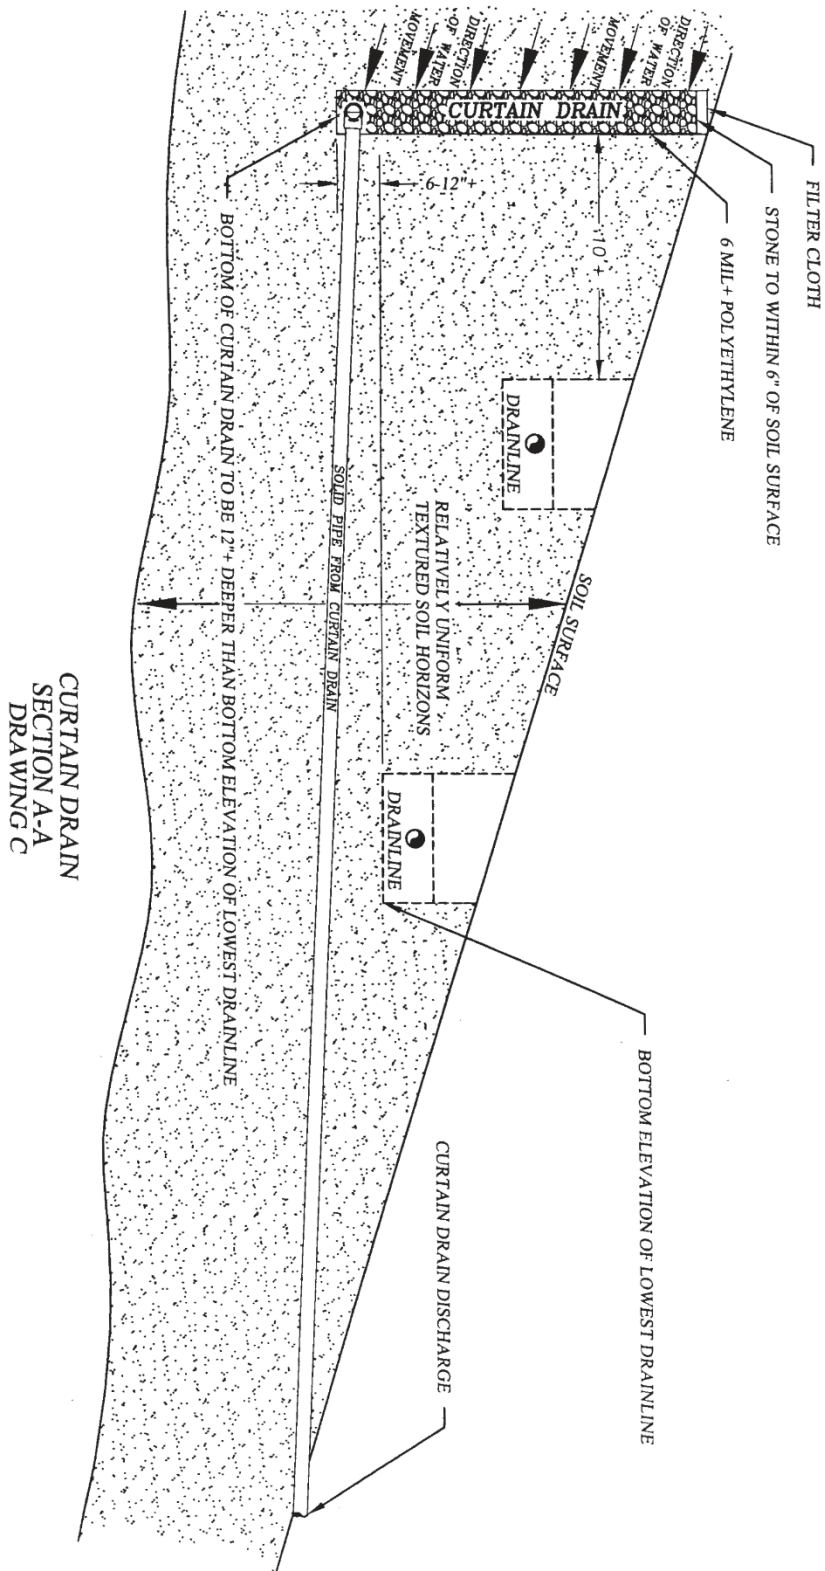

**CURTAIN DRAIN
SECTION A-A
DRAWING C**

DRAWING NOT TO SCALE

Rev. 03/09/18 T.L.S.

Appendix S – Nonwater-Carried Sewage Treatment Systems

(1) The permitting of nonwater-carried sewage treatment systems, such as a biological, composting, or incinerating toilet, may be considered for toilet wastes when a proposed site is unsuitable for the issuance of an onsite wastewater system permit under the system standards in Appendices A through R. Nonwater-carried sewage treatment systems shall be designed, installed, maintained, and operated without endangering public health, the environment, or creating a nuisance.

(2) With the application for a permit to construct, all applicants seeking to install a nonwater-carried sewage treatment system must submit to the Department plans from a Registered Professional Engineer licensed in South Carolina that describe the design and installation of the proposed nonwater-carried sewage treatment system and demonstrate the following:

(a) The system complies with all local codes and ordinances.

(b) All products and processes meet applicable National Sanitation Foundation (NSF) Standards and American National Standards Institute (ANSI) Standard 41 and bear the seal of approval of the NSF or an equivalent testing and certification program.

(c) Compartment and appurtenances are insect and vector-proof and have continuous exterior ventilation.

(d) There will be no liquid wastewater produced by the system.

(e) Methods for training the owner/operator in the proper use, function, and maintenance of the system including safe handling and disposal methods for any residue generated by the system.

(f) All manufacturer recommendations for installation, operation, and maintenance will be followed.

(3) Applicants seeking to install a nonwater-carried sewage treatment system at a site where water under pressure will be connected to the structure and gray water is generated (from showers, sinks, etc.), but where nonwater-carried sewage treatment systems will be the only means for toilet waste disposal, must:

(a) Submit plans from a Registered Professional Engineer licensed in South Carolina that meet the requirements of Appendix S, paragraphs (2)(a) through (f), for all toilet wastes; and

(b) Apply for and obtain a Department permit to construct and approval to operate an onsite wastewater system for treatment of gray water. This system must meet all permit, licensing, and onsite wastewater system requirements under this regulation, except that the initial system size may be reduced by twenty-five (25) percent.

(4) A licensed installer is not required for the installation of a nonwater-carried sewage treatment system under this standard. However, engineering certifications using the applicable Department form must be submitted to the Department before the Department will issue an approval to operate a system under this standard.

Appendix T – Wastewater Combustion Systems

(1) Wastewater combustion systems may be considered when a proposed site is unsuitable for the issuance of an onsite wastewater system permit under the system standards in Appendices A through R. A

wastewater combustion system shall be designed, installed, maintained, and operated without endangering public health, the environment, or creating a nuisance.

(2) With the application for a permit to construct, all applicants seeking to install a wastewater combustion system must submit to the Department plans from a Registered Professional Engineer licensed in South Carolina that describe the design and installation of the proposed wastewater combustion system and demonstrate the following:

(a) The system complies with all local codes and ordinances.

(b) Canadian Standards Association (CSA) certification of the wastewater combustion system in the United States.

(c) The system must be of adequate size to handle the wastewater volume and peak flow generated by the structure.

(d) Compartment and appurtenances are insect and vector-proof and have continuous exterior ventilation.

(e) All liquid wastewater produced must be sent to the combustion system. Liquid wastewater must not be sent to an onsite wastewater system or held in a storage system to be pumped and hauled.

(f) Methods for training the owner/operator in the proper use, function, and maintenance of the system including safe handling and disposal methods for any residue generated by the system.

(g) All manufacturer recommendations for installation, operation, and maintenance will be followed.

(3) Applicants seeking to install a wastewater combustion system for toilet wastes in conjunction with an onsite wastewater system for treatment of gray water generated by the structure must:

(a) Submit to the Department plans from a Registered Professional Engineer licensed in South Carolina that meet the requirements of Appendix T, paragraphs (2)(a) through (g), for all toilet wastes; and

(b) Apply for and obtain a Department permit to construct and approval to operate an onsite wastewater system for treatment of gray water. This system must meet all permit, licensing, and onsite wastewater system requirements under this regulation, except that the initial system size may be reduced by twenty-five (25) percent.

(4) A licensed installer is not required for the installation of a wastewater combustion system under this standard. However, engineering certifications using the applicable Department form must be submitted to the Department before the Department will issue an approval to operate a system under this standard.

Appendix U – Gray Water Subsurface Reuse Systems

(1) With the application for a permit to construct, all applicants seeking to install a gray water subsurface reuse system must submit to the Department for approval plans from a Registered Professional Engineer licensed in South Carolina that describe the design and installation of the proposed gray water subsurface reuse system and demonstrate the following:

(a) The system complies with all local codes and ordinances.

(b) The system must be of adequate size to handle the wastewater volume and peak flow generated by the structure.

(c) Compartment and appurtenances are insect and vector-proof and have continuous exterior ventilation.

(d) All gray water produced by the structure must be sent to the gray water subsurface reuse system or to a separate onsite wastewater system for treatment and disposal of domestic wastewater. Liquid wastewater must not be held in a storage system to be pumped and hauled.

(e) Methods for training the owner/operator in the proper use, function, and maintenance of the system including safe handling and disposal methods for any residue generated by the system.

(f) All manufacturer recommendations for installation, operation, and maintenance will be followed.

(2) This regulation does not apply to or permit the reuse of gray water for any purpose, or by any means, other than subsurface irrigation. This regulation also does not apply to or permit any reuse or recirculation of gray water within the confines of (i.e., via the plumbing within) a dwelling unit, building, business, or other structure.

(3) A property owner proposing to install a gray water subsurface reuse system for the reuse and disposal of gray water shall ensure that there is also an approved method of treatment and disposal for all other domestic wastewater and sewage generated by the structure. An onsite wastewater system for the treatment and disposal of all other domestic wastewater and sewage generated by the structure shall meet all requirements of this regulation, including standard sizing requirements.

(4) A licensed installer is not required for the installation of a gray water subsurface reuse system under this standard. However, engineering certifications using the applicable Department form must be submitted to the Department before the Department will issue an approval to operate a system under this standard.

~~500 APPENDIX Q LONG TERM ACCEPTANCE RATE STANDARD FOR ONSITE WASTEWATER SYSTEMS~~
500. Long-Term Acceptance Rate Standard for Onsite Wastewater Systems.

USDA-NRCS SOIL TEXTURE	SOIL CHARACTERISTICS WHEN MOIST (FIELD TEST)	LONG-TERM ACCEPTANCE RATE (GPD/SF)	
Sand (S)	Sandy Sand has a gritty feel, does not stain the fingers, and does not form ribbon or ball when wet or moist.	0.9 – 1.0	Class I
Loamy Sand (LS)	Loamy sand has a gritty feel, stains the fingers, forms a weak ball, and cannot be handled without breaking.		
Sandy Loam (SL)	Sandy loam has a gritty feel and forms a ball that can be picked up with the fingers and handled with care without breaking.	0.7 – 0.8	Class II
Loam (L)	Loam may have a slightly gritty feel but does not show a fingerprint, and forms only short ribbons of from 0.25 – 0.50 inch. Loam will form a ball that can be handled without breaking.		

<u>USDA-NRCS SOIL TEXTURE</u>	<u>SOIL CHARACTERISTICS WHEN MOIST (FIELD TEST)</u>	<u>LONG-TERM ACCEPTANCE RATE (GPD/SF)</u>	
Sandy Clay Loam (SCL)	Sandy clay loam has a gritty feel but contains enough clay to form a firm ball; and may ribbon from 0.75 – 1.0 inch.	0.5 – 0.6	Class III
Clay Loam (CL)	Clay loam is sticky when moist, forms a ribbon of 1.0 – 2.0 inches, and produces a slight sheen when rubbed with the thumbnail. Clay loam produces a nondistinct fingerprint.		
Silt Loam (SiL)	Silt loam has a floury feel when moist and will show a fingerprint, but will not ribbon and forms only a weak ball.		
<u>Silt (Si)</u>	<u>Silt has a floury feel when moist and is sticky when wet but will not ribbon and forms a ball that will tolerate some handling.</u>	0.1 – 0.4	Class IV
Silty Clay Loam (SiCL)	Silty clay loam has a slight floury feel, is sticky when moist, and will ribbon from 1.0 – 2.0 inches. Rubbing with thumbnail produces a moderate sheen. Silty clay loam produces a distinct fingerprint.		
Sandy Clay (SC)	Sandy clay is plastic, gritty, and sticky when moist, forms a firm ball, and produces a ribbon in excess of 2.0 inches.		
Clay (C)	Clay is both sticky and plastic when moist, produces a ribbon in excess of 2.0 inches, produces a high sheen when rubbed with the thumbnail, and forms a strong ball resistant to breaking.		
Silty Clay (SiC)	Silty clay has a slight floury feel, is both sticky and plastic when moist, forms a ball, and produces a ribbon in excess of 2.0 inches.		

(1) The long-term acceptance rate for system sizing shall be based upon the most hydraulically limiting naturally occurring soil texture from the ground surface to twelve (12) inches below the bottom of the proposed wastewater infiltration trenches. Alternative and experimental systems installed beneath expansive soils shall be sized at a long-term acceptance rate not to exceed 0.2-0.25 ~~GPD/SF~~ gpd/sf as specified in approved standards.

(2) Soil texture shall be estimated by field testing as described above. -Laboratory determination of soil texture may be substituted for field testing when conducted in accordance with: (1) Bouyoucos, G.J. 1962. Hydrometer Method Improved for Making Particle Size Analyses of Soils. Agron. J. 53:464-465; (2) ASTM D-422, Procedures for Sieve and Hydrometer Analyses; or (3) the Pipette Method (ASA-CSSA-SSSA), USDA Methods of Soils Analysis, Soil Survey Laboratory Information Manual, and Soil Survey Laboratory Methods Manual.

(3) The total linear feet (~~LF~~f) for conventional onsite wastewater systems shall be calculated by dividing the peak daily flow (~~GPD~~gpd) by the long-term acceptance rate (~~GPD/SF~~gpd/sf) and dividing the result by the trench width (~~FT~~ft): $LFf = GPDgpd \div GPD/SFgpd/sf \div FTft$. -The total linear feet for alternative systems may either be increased or decreased in accordance with factors specified in alternative standards.

~~501 APPENDIX R – PEAK SEWAGE FLOW RATE STANDARD~~ **501. Peak Sewage Flow Rate Standard.**

ESTABLISHMENT	UNIT	PEAK FLOW RATE GAL/UNIT/DAY
Airport (Not Including Food Service)	Passenger	3
Assembly Halls	Person	3
Bar (Not Including Food Service)	Customer Seat	5 15
Beauty/Style Shops/Barber Shops	Chair	100
Businesses/Offices/Factories	Employee/Shift Transient Employee (4 hrs or Less/Shift) Employee	15 10 10
(Add for Showers)		
Camps (No Laundry)		
-Labor/Summer/Retreat	Person	35
(Separate Food Service)	Person	10
(Separate Bath House)	Person	25
-Day Camps (with meal)	Person	15
(without meal)	Person	10
Campgrounds (No Laundry)		
-Full Water/Sewer	Campsite	120
-No Sewer Risers, Bathhouse only	Campsite	50
(Add for Dump Station)	Campsite	40
Car Wash (Non-automatic)	Bay	500
Church (No Daycare)		
-With Kitchen	Seat	3
-Without Kitchen	Seat	2
-Family Life Center	Person	5
Day Care	Child	10
Food Service		
-Full Service Utensils	Meal Person Seat	4 10 40
-Paper/Plastic Utensils		Reduce by 50 percent
Golf Course Club House (Not Including Foodservice)	Player	10
Kennel	Run	25
Laundromat	Machine	500
ESTABLISHMENT	UNIT	PEAK FLOW RATE GAL/UNIT/DAY
Mortuary (for domestic wastewater only, no infectious waste)	Body	25
Hotel/Motel (Not Including Food Service)	Room	100
Picnic Park	Visitor	10
Public Restroom	User	3

<u>ESTABLISHMENT</u>	<u>UNIT</u>	<u>PEAK FLOW RATE GAL/UNIT/DAY</u>
Residential/Dwelling (i.e., Apartment/Condominium/Individual Dwelling, including Resort Rental and Resort Residence)	Bedroom	120
Residential Care	Resident	100
Residential Out-Building (not used as a dwelling; e.g., pool house, private workshop or garage with private-use bathroom with toilet and sink; barn with hand-wash sink)	1 to 3 Users Without washing machine	60
	With washing machine/shower	120
School -With Cafeteria, Gym & Showers -With Cafeteria only -Without Cafeteria, Gym or Showers -Boarding School	Student	15
	Student	10
	Student	8
	Person	60
Stadium (Not Including Food Service)	Seat/Occupancy	3
Swimming Area Bathhouse	Person	10
Visitor Center	Visitor	5

The peak flow rate (~~GPD~~gpd) for non-residential facilities may either be increased or reduced when comparable peak water consumption data for similar establishments in similar locations vary from the requirement. When considering such data, at least twelve (12) consecutive months must be presented with the maximum month of consumption and the days of operation per month being utilized to arrive at the peak flow rate (~~GPD~~gpd).

~~600 APPENDIX S — ONSITE WASTEWATER PUMP SYSTEM STANDARD~~ **502. Onsite Wastewater Pump System Standard.**

~~600.1 PUMP TANK (GENERAL)~~ **502.1. Pump Tank (General).**

(1) The submersible sewage effluent pump(s) must be housed in a properly vented, watertight tank that is readily accessible from the surface.

(2) A watertight access opening with removable lid shall be provided; and shall be designed and maintained to prevent surface water inflow. -Risers and other pump tank sections, where present, shall be joined using mastic, butyl rubber, or other pliable sealant that is waterproof, corrosion-resistant, and approved for use in septic tanks.

(3) When the pump tank must be located in an area characterized by a shallow zone of ~~seasonal~~ saturation, the Department may require the use of a pre-cast manhole, a fiberglass or polyethylene basin, or any other acceptable method for preventing groundwater intrusion.

(4) When the pump tank must be located in an area that is environmentally sensitive or subject to flooding, applicable portions of ~~R. 61-67~~R.61-67, Standards for Wastewater Facility Construction, shall apply.

(5) The pump tank shall have sufficient capacity to accommodate all level control and alarm switches; to keep the pump(s) totally submersed in liquid at all times; and to provide the required dosing volume and minimum pump run time. ~~It is strongly recommended that pump tank capacities be as large as possible (i.e., 500-1000 gal.)~~Pump tank capacity must be at least 500 gallons in order to provide emergency storage in the event of pump or power failure and to assist in maintaining the minimum pumping rate as listed in Section 502.2.

(6) Pre-engineered, manufactured packaged pump stations can be utilized in lieu of the composite design described herein, provided the pump meets the minimum capacity requirements of the system and no alterations are made to the pump station other than those specifically authorized by the manufacturer.

~~600.2 MINIMUM PUMPING RATES (PEAK INFLOW) AND MINIMUM RUN TIMES~~502.2. Minimum Pumping Rates (Peak Inflow) and Minimum Run Times.

(1) For residential systems, the maximum daily flow entering the pump tank shall be based upon one hundred twenty (120) gpd per bedroom. ~~For commercial and other facilities, this value shall be based upon the Standard for Determining Sewage Flow Rates from Commercial and Recreational Establishments Section 501, Peak Sewage Flow Rate Standard.~~

(2) The minimum pumping rate (peak inflow) for discharges up to fifteen hundred (1500) gpd shall be determined as follows:

<u>Maximum Estimated Daily Flow (gpd)</u>	<u>Minimum Pumping Rate (peak inflow) (gpm)</u>
480 and less	10
481 - 720	15
721 - 1500	20

(3) The minimum pumping rate (peak inflow) for discharges in excess of fifteen hundred (1500) gpd shall be determined by multiplying the average flow rate (gpm) times a peaking factor of not less than 2.5, where the average flow rate is based upon actual minutes per day of facility operation.

(4) The minimum pump run time for all pump systems shall be determined as follows:

<u>Minimum Pumping Rate (peak inflow) (gpm)</u>	<u>Minimum Pump Run time (min)</u>
10 - 14	3
15 - 24	4
25 and above	5

~~600.3 MINIMUM DOSING VOLUME, SCOURING VELOCITY, AND PUMP CAPACITY~~502.3. Minimum Dosing Volume, Scouring Velocity, and Pump Capacity.

(1) The minimum dosing volume (gal) shall be determined by multiplying the minimum pumping rate (gpm) times the minimum pump run time (min).

(2) The selected pump(s) must have the capacity to deliver the minimum pumping rate (gpm) at a scouring velocity of at least one (1) ft/sec (effluent) or two (2) ft/sec (raw) against the total dynamic head of the system. -This minimum pump capacity (gpm at total feet of dynamic head) shall be specified on ~~SCDHEC Form 1739~~ the permit to construct.

(3) Duplex pumps shall be required when the maximum estimated daily flow is equal to or greater than fifteen hundred (1500) gallons, and each pump shall meet the minimum capacity as stated above.

(4) In those cases where the minimum pump capacity or any other system requirements exceed what can be specified ~~thru~~ through the use of this Standard, the Department shall require the applicant to retain the services of a Registered Professional Engineer licensed in South Carolina.

~~600.4~~ FORCE MAIN, VALVES, AND FITTINGS 502.4. Force Main, Valves, and Fittings.

(1) The force main shall be Schedule 40 PVC, and the diameter shall be sufficient to provide a velocity of at least one (1) ft/sec (effluent) or two (2) ft/sec (raw) using a C Factor of one hundred fifty (150) (effluent) or one hundred forty (140) (raw) at the minimum pumping rate (peak inflow). The force main shall be installed a minimum of eight (8) inches below the ground surface. Fittings and valves shall be of compatible corrosion resistant material.

(2) A threaded union, flange, or similar disconnect device shall be provided in each pump discharge line. -The pump(s) shall be easily removable at ground surface without requiring entrance into the tank. Valves shall also be readily accessible from the ground surface. -Duplex pump systems shall be equipped with a separate pit or box for the placement and operation of valves.

(3) A shutoff valve (e.g., gate valve) and a check valve shall be located on the discharge line from each pump. -The check valve shall be placed between the pump and the shutoff valve.

(4) A three-sixteenths (3/16) inch anti-siphon hole(s) shall be placed between the pump(s) and the check valve(s) when the discharge elevation of the distribution system is below the inlet to the pump tank.

(5) In cases where the force main must be installed over undulating terrain, automatic air relief valves shall be placed at high points in the line to prevent air locking.

(6) Exposed force mains crossing ditches and bodies of water (e.g., creeks and wetlands) and force mains under driveways and parking areas must be protected by encasing them within a larger diameter pipe that can withstand potential damage (e.g., galvanized pipe, steel pipe, ductile iron). Force mains under driveways and parking areas may also be protected by encasing them within a larger diameter schedule 80 PVC pipe. The protective piping should extend beyond the area of needed protection for at least ten (10) linear feet.

~~(6)~~(7) The force main effluent shall discharge into a separate discharge box or distribution manifold before entering either a septic tank or a soil wastewater infiltration trench. -The flow shall be directed to the bottom of the box ~~thru~~ through a PVC elbow; or into a distribution manifold at an angle of ninety (90) degrees to the septic tank or first wastewater infiltration trench.

~~600.5~~ 502.5. Pumps, Control Devices and Electrical Connections.

(1) Pumps shall be listed by Underwriter's Laboratory or an equivalent ~~third-party~~ third-party testing and listing agency; and shall be specifically manufactured for use with domestic wastewater.

(2) Sealed mercury control floats or similar devices designed for detecting liquid levels in septic tank effluent shall be provided to control pump cycles. -A separate level sensing device shall be provided to activate an audible and visible high water alarm. -Pump-off levels shall be set to keep the pump submerged at all times.

(3) Pump and control circuits shall be provided with manual circuit disconnects within a watertight, corrosion resistant, outside enclosure (NEMA 4X or equivalent) adjacent to the pump tank, securely mounted at least twelve (12) ~~inches~~ above finished grade, unless installed within a weather-tight building. Alarm circuits shall be supplied ahead of any pump overload or short circuit protective devices. -The pump(s) shall be manually operable without requiring special tools or entrance into the tank for testing purposes. -Conductors shall be conveyed to the disconnect enclosure through water proof, gas proof, and corrosion resistant conduit(s); with no splices or junction boxes provided inside the tank. -Wire grips, duct seal, or other suitable material shall be used to seal around wire and wire conduit openings inside the pump tank and disconnect enclosure.

(4) For systems requiring duplex pumps, each pump shall operate in a lead-lag sequence and be on an alternating cycle. -A control panel shall be provided which shall include short circuit protection for each pump and for the control system, independent disconnects, automatic pump sequencer, hands-off-automatic (H-O-A) switches, run lights, and elapsed time counters for each pump.

~~600.6 FINAL INSPECTION AND APPROVAL~~ 502.6. Final Inspection and Approval.

(1) Before or during final inspection, the property owner or agent shall provide literature, including a pump curve, describing the specific pump installed. -The inspector shall evaluate the system in accordance with this Standard, and shall confirm that all items, including the minimum pump capacity specified on ~~SCDHEC Form 1739~~ the permit to construct, have been satisfied.

(2) Prior to final approval, the installer or electrician shall provide the Department with written documentation verifying that pump system electrical connections were made in accordance with all applicable codes. The Department may require testing of the pump system, demonstration of watertight integrity, or any other procedure deemed necessary to confirm the acceptability of the installation.

~~600.7~~ 502.7. Raw Sewage Pump Stations.

(1) In those cases where it is necessary to pump raw sewage from a residence or facility to an onsite wastewater system, the pump station shall meet all applicable portions of this Standard and ~~R. 61-67~~ R. 61-67, Standards for Wastewater Facility Construction.

(2) Adherence to the pump manufacturer's recommendations shall also be a major consideration with such systems.

~~700. APPENDIX T - MINIMUM DESIGN STANDARDS FOR TANK CONSTRUCTION~~ 503. Minimum Design Standards for Tank Construction.

~~700.1 INTRODUCTION~~ 503.1. Introduction.

The following standards describing tank designs intended to be utilized for septic tanks, grease traps, or pump chambers for onsite wastewater ~~disposal~~ systems have been adopted in an effort to assure a quality product of sufficient strength and resistance, capable of fulfilling its intended purpose.

~~700.2 DESIGN APPROVAL~~ 503.2. Design Approval.

(1) No person shall manufacture tanks intended to be utilized for septic tanks, grease traps, or pump chambers for onsite wastewater ~~disposal~~-systems without receiving approval from the Department. All manufactured tanks must receive approval of design and reinforcement methods prior to manufacturing.

(2) Any person desiring to manufacture tanks shall ~~make~~ submit a written application on forms provided by the Department. Such application shall include the name and address, the location of the facility, tank capacity, and design information.

(3) Prior to approval, the Department shall review the tank design, reinforcement, and manufacturing methods to determine compliance.

(4) The Department shall approve plans for manufactured tanks to ensure compliance with the South Carolina Minimum Design Standards for Tank Construction.

(5) The Department shall approve plans for fabricated tanks, other than those for precast reinforced concrete tanks, on an individual basis. Fabricated tanks shall meet the requirements of precast reinforced concrete tanks to provide equivalent effectiveness.

(6) The Department shall issue an approval to the tank manufacturer if the tank design, reinforcement and manufacturing method complies with the South Carolina Minimum Design Standards for Tank Construction. Tank manufacturing approvals are not transferable. When a change of ownership occurs, the new owner shall ~~make~~ submit a written application on forms provided by the Department.

(7) The Department shall revoke approval to manufacture tanks for onsite wastewater ~~disposal~~-systems if the tank manufacturer fails to comply with the South Carolina Minimum Design Standards for Tank Construction.

~~700.3 GENERAL~~ 503.3. General.

(1) Septic tanks and grease traps shall be manufactured as single compartment or partitioned tanks.

(2) If septic tanks and grease traps are manufactured with a partition so that the tank contains two (2) compartments, the inlet compartment of the tank shall contain two-thirds ($2/3$) of the overall capacity, and the outlet compartment shall contain one-third ($1/3$) of the overall capacity. The top of the partition shall terminate two (2) inches below the bottom side of the tank top in order to leave space for air or gas passage between compartments. The top and bottom halves of the partition shall be constructed in such manner as to leave a four (4) inch water passage at the vertical ~~mid-point~~ mid-point of the partition wall for the full width of the tank.

(3) The minimum liquid capacity requirements shall be met by the use of a single septic tank or two (2) or more tanks installed in series. -Septic tanks joined in series shall be interconnected by an upper effluent pipe(s) with a minimum diameter of four (4) inches and a lower sludge pipe(s) with a minimum diameter of twelve (12) inches. -The upper connection(s) shall be installed level from tank to tank, and the lower sludge pipe connection(s) shall be installed level and shall be placed twelve (12) inches above the bottoms of the tanks. -The lower sludge pipe connection(s) can be eliminated if the first tank in series contains at least two-thirds ($2/3$) of the total required liquid capacity. There shall be no more than two (2) inches of fall from the inlet invert of the first tank to the outlet invert of the last tank in series.

(4) It is required that all pump chambers function as a single compartment tank. -If a two (2) compartment tank is used, at least two (2) six (6) inch diameter holes or equivalent, must be provided in the partition wall six (6) inches from the tank bottom.

(5) The septic tank and grease trap tank length shall be at least two (2) but not more than three (3) times the width.

(6) The liquid depth shall not be less than four (4) feet.

(7) A minimum of nine (9) inches of freeboard shall be provided in all tanks, unless otherwise approved by the Department.

(8) Useable liquid capacity for septic tanks or grease traps shall not be less than one thousand (1000) gallons.

(9) The pump tank shall have sufficient capacity to accommodate all level control and alarm switches; to keep the pump(s) totally submersed in liquid at all times; and to provide the required dosing volume and minimum pump run time. -It is strongly recommended that pump tank capacities be as large as possible in order to provide emergency storage in the event of pump or power failure.

(10) There shall be a minimum of two (2) openings in the tank wall, located at the inlet and outlet ends of the tank. The knockouts for the inlet and outlet openings of pre-cast tanks shall have a concrete thickness of not less than one (1) inch in the tank wall. The openings shall allow for a minimum of four (4) inch pipe or a maximum of six (6) inch pipe. No openings shall be permitted below the tank liquid level.

(11) The inlet and outlet for septic tanks and grease traps shall be a cast-in-place concrete tee, a polyvinyl chloride (PVC) tee, or a polyethylene (PE) tee; made of not less than Schedule 40 pipe or equivalent fittings and material. The cast-in-place concrete tees shall have a minimum thickness of not less than two (2) inches. The invert of the outlet shall be at least two (2) inches lower in elevation than the invert of the inlet. The inlet and outlet tees shall extend above liquid depth to approximately one (1) inch from the top of the tank to allow venting between tank compartments and multiple tank configurations.

(12) The inlet tee for septic tanks and grease traps shall extend sixteen (16) inches below the liquid level.

(13) The outlet tee for a septic tank shall extend eighteen (18) inches below the liquid level and the outlet tee for a grease trap shall extend between six (6) and twelve (12) inches above the tank bottom.

(14) The inlet, outlet, and wiring conduit openings of all tanks must utilize a resilient, watertight, non-corrosive connective sleeve. -The use of grout is prohibited.

(15) Access to each tank or compartment shall be provided by an opening located above the inlet and outlet with an inside dimension of at least eighteen (18) inches square (18 x 18) or in diameter, with removable tank access lids.

(16) Concrete tank access lids shall be equipped with steel lift rings at least three-eighths (3/8) inch diameter; or by an alternative method approved by the Department.

(17) Should risers or manholes be utilized to allow access into septic tanks, grease traps, or pump chambers, the risers/~~manholes~~ or manhole covers, as applicable, shall be constructed to prevent the release of odors, entry of vectors, and water. Grade level riser/manhole covers shall be secured by bolts or locking

mechanisms, or have sufficient weight to prevent unauthorized access. -The ground shall slope away from any access extended to grade level.

(18) Risers/manholes shall be sealed to the tank by using bituminous mastic, butyl rubber, or other pliable sealant that is waterproof, corrosion-resistant, and approved for use in tank construction. The sealant shall have a minimum size of one (1) inch diameter or equivalent. The joint shall be smooth, intact, and free of all deleterious substances before sealing.

(19) After curing, all multi-piece tanks shall be joined and sealed at the joints by using a bituminous mastic, butyl rubber, or other pliable sealant that is waterproof, corrosion-resistant, and approved for use in tank construction. The sealant shall have a minimum size of one (1) inch diameter or equivalent. The joint shall be smooth, intact, and free of all deleterious substances before sealing. The use of grout is prohibited.

(20) All tanks must pass the ASTM C-1227 Standard for watertight testing. The Department will choose tanks at random for testing. -Tanks will be approved for use in South Carolina after the Department ascertains that the standard is met. After joining, tanks manufactured in multiple sections shall be plastered along the section joints with hydraulic cement or other waterproofing sealant. Other methods of waterproofing tanks may be used as specifically approved in the plans and specifications for the tank. Prior to backfilling, the ~~local health department~~ Department shall make a finding that multiple section tanks are watertight if a soil wetness condition is present within five feet of the elevation of the top of the tank. -Any tank found to be improperly sealed, having cracks or holes, which will allow for water infiltration or discharge of sewage from the tank bottom, walls, or top, will not be approved for use.

(21) Tank manufacturers must have equipment and capabilities for portion control to maintain constant mixture formulation ratios and provide for systematic inspection of finished products to ~~insure~~ ensure compliance with the minimum tank construction and design standards.

(22) The concrete mix used for concrete tank components must be formulated to yield a minimum twenty-eight (28) day compressive strength of four thousand (4,000) pounds per square inch (psi).

(23) The aggregate size utilized in the concrete mix shall not exceed one-third (1/3) of the wall thickness. Suitable aggregates include sand particle sizes from a fine to one-fourth (1/4) inch gravel or crushed stone. Granite dust or fine screenings from a crusher operation may be used in lieu of sand.

(24) An identifying seal must be cast or permanently affixed by an approved method from the Department on the outlet tank wall within six (6) inches of the top. The identifying seal shall identify the manufacturer and the liquid capacity of the tank. The tank's cast date shall be located on the identifying seal or imprinted on the top of the tank within six (6) inches from outlet tank wall near the identifying seal. The lettering on the identifying seal or date imprinted on the top of the tank shall be no more than six (6) inches in height.

(25) The tank manufacturer shall guarantee all tanks in writing for two (2) years against failure due to poor workmanship and materials.

(26) Changes in approved tank design, construction, and alternative reinforcing methods will not be allowed without prior approval from the Department.

~~700.4 PRE-CAST CONCRETE NON-FIBER REINFORCED SEPTIC TANKS AND GREASE TRAPS~~ 503.4. Pre-Cast Concrete Non-Fiber Reinforced Septic Tanks and Grease Traps.

(1) The tank walls and bottom shall be reinforced with six ~~inch~~-by six ~~inch~~ (6 x 6) inch ten (10) gauge wire mesh.

(2) Tank tops shall be reinforced with six by six ~~inch~~ (6 x 6) inch ten (10) gauge wire mesh, a minimum of five (5) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls beginning at the center spaced twelve (12) inches apart; and four (4) sections of three-eighths (3/8) inch diameter steel reinforcing bars placed diagonally from the corners to the center of the tank. -The length of the perpendicular reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall. -The length of the four (4) diagonal steel reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall and six (6) inches beyond the closest perpendicular steel reinforcing bar.

(3) If a septic tank or grease trap is manufactured with a partition, the tank partition (both halves) shall be reinforced with six by six ~~inch~~ (6 x 6) inch ten (10) gauge wire mesh. The reinforcing wire shall be bent to form an angle of ninety (90) degrees on the ends in order to form a leg not less than four (4) inches long. When the wire is placed in the mold, the four-inch legs shall lay parallel with the sidewall wire and adjacent to it.

(4) The tank walls and bottom thickness shall be at least two and one-half (2½) inches, and top thickness shall be at least three (3) inches.

(5) All reinforcing wire and rods must be covered by at least one-half (1/2) inch of concrete.

(6) An acceptable vibration method shall be employed in the construction of the tank to prevent voids in the tank walls, bottom and top.

~~700.5 PRE-CAST CONCRETE FIBER REINFORCED SEPTIC TANKS AND GREASE TRAPS~~ 503.5.
Pre-Cast Concrete Fiber Reinforced Septic Tanks and Grease Traps.

(1) Tank tops shall be reinforced with a minimum of five (5) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls beginning at the center spaced twelve (12) inches apart, and four (4) sections of three-eighths (3/8) inch diameter steel reinforcing bars placed diagonally from the corners to the center of the tank. -The length of the perpendicular reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall. -The length of the four (4) diagonal steel reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall and six (6) inches beyond the closest perpendicular steel reinforcing bar.

(2) Tank bottoms shall be reinforced with a minimum of seven (7) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls beginning at the center spaced twelve (12) inches apart. -The length of the perpendicular reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall.

(3) If a septic tank or grease trap is manufactured with a partition, the tank partition (both halves) shall be reinforced with six by six ~~inch~~ (6 x 6) inch ten (10) gauge wire mesh. The reinforcing wire shall be bent to form an angle of ninety (90) degrees on the ends in order to form a leg not less than four (4) inches long. When the wire is placed in the mold, the four-inch legs shall lay parallel with the sidewall wire and adjacent to it.

(4) The tank perimeter walls shall be reinforced with three-eighths (3/8) inch diameter steel reinforcing bars located one (1) inch from the tank's top and bottom section seams.

(5) The tank walls and bottom thickness shall be at least two and one-half (2½) inches, and top thickness shall be at least three (3) inches.

- (6) All reinforcing wire and rods must be covered by at least one-half (1/2) inch of concrete.
- (7) Fiber products used with this reinforcement design must be added during the mixing process in order to achieve even distribution throughout the concrete mixture.
- (8) Fiber length must range from at least one (1) to no more than two (2) inches.
- (9) The fiber must be specifically manufactured for use as a concrete secondary reinforcement and be a polypropylene fibrillated (two-dimensional fiber mesh network) material.
- (10) An acceptable vibration method shall be employed in the construction of the tank to prevent voids in the tank walls, bottom and top.

~~700.6 CONCRETE BLOCK SEPTIC TANKS AND GREASE TRAPS~~ 503.6. Concrete Block Septic Tanks and Grease Traps.

- (1) The tank walls and partition thickness shall be at least eight (8) inches and the top cover slabs thickness shall be at least four (4) inches.
- (2) The tank bottom shall be a single pour concrete slab to a depth of at least four (4) inches within the first block course.
- (3) If a septic tank or grease trap is manufactured with a partition, the tank walls and partition shall be constructed of solid sixteen ~~inch~~-by eight ~~inch~~-by eight ~~inch~~ (16 x 8 x 8) inch concrete blocks. The use of hollow blocks is prohibited.
- (4) All joints between concrete blocks shall be mortared using masonry cement mortar or equivalent. The joints shall have a nominal thickness of three-eighths (3/8) inch.
- (5) The upper partition wall may be supported by the use of two ~~inch~~-by four ~~inch~~-by eight (2 x 4 x 8) inch bricks (or equivalent support material) standing on edge located at the block seams of the upper partition wall.
- (6) The top cover slabs shall be constructed such that the individual slabs will not exceed two (2) feet in width and the length will be sufficient to extend to the outside tank width with a minimum slab thickness of four (4) inches.
- (7) The individual top cover slabs shall be reinforced with a minimum of two (2) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls spaced twelve (12) inches apart from the center. The length of the perpendicular reinforcing bars shall be of sufficient length to extend the full length of the slab.
- (8) The end cover slabs shall be constructed such that the individual slabs will not exceed three (3) feet in width and the length will be sufficient to extend to the outside tank width with a minimum slab thickness of four (4) inches.
- (9) The end cover slabs shall be cast to allow access to each tank or compartment by providing an opening located above the inlet and outlet tee with an inside dimension of eighteen (18) inches square (18 x 18 inches) or in diameter with removable tank access lids.

(10) The individual end cover slabs shall be reinforced with two (2) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls spaced twelve (12) inches apart from the center and two (2) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls spaced sixteen (16) inches apart from the center. The length of the perpendicular reinforcing bars shall be of sufficient length to extend the full length of the slab.

(11) The top and end cover slab seams shall be sealed to the tank walls and at all joints by using a bituminous mastic, butyl rubber, or other pliable sealant that is waterproof, corrosion-resistant, and approved for use in septic tanks. The sealant shall have a minimum size of one (1) inch diameter or equivalent. The use of grout is prohibited.

(12) The tank top and end cover slabs shall be equipped with steel lift handles at least one half (1/2) inch diameter, or by an alternative method approved by the Department.

(13) All reinforcing rods must be covered by at least one-half (1/2) inch of concrete.

(14) The interior of the tank (walls and bottom) shall be plastered with a waterproofing cement compound.

(15) An acceptable vibration method shall be employed in the construction of the tank to prevent voids in the tank access lids, tank bottom, and top and end slabs.

~~700.7 PRE CAST CONCRETE NON FIBER REINFORCED PUMP CHAMBERS~~503.7. Pre-Cast Concrete Non-Fiber Reinforced Pump Chambers.

(1) The tank walls and bottom shall be reinforced with six ~~inch~~-by six ~~inch~~-(6 x 6) inch ten (10) gauge wire mesh.

(2) Tank tops shall be reinforced with six by six ~~inch~~-(6 x 6) inch ten (10) gauge wire mesh, a minimum of five (5) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls beginning at the center spaced twelve (12) inches apart, and four (4) sections of three-eighths (3/8) inch diameter steel reinforcing bars placed diagonally from the corners to the center of the tank. -The length of the perpendicular reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall. -The length of the four (4) diagonal steel reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall and six (6) inches beyond the closest perpendicular steel reinforcing bar.

(3) The tank walls and bottom thickness shall be at least two and one-half (2½) inches, and top thickness shall be at least three (3) inches.

(4) All reinforcing wire and rods must be covered by at least one-half (1/2) inch of concrete.

(5) An acceptable vibration method shall be employed in the construction of the tank to prevent voids in the tank walls, bottom, and top.

~~700.8 PRE CAST CONCRETE FIBER REINFORCED PUMP CHAMBERS~~503.8. Pre-Cast Concrete Fiber Reinforced Pump Chambers.

(1) Tank tops shall be reinforced with a minimum of five (5) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls beginning at the center spaced twelve (12) inches apart, and four (4) sections of three-eighths (3/8) inch diameter steel reinforcing bars placed diagonally from the corners to the center of the tank. -The length of the perpendicular reinforcing

bars shall be of sufficient length to extend two (2) inches into the sidewall. -The length of the four (4) diagonal steel reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall and six (6) inches beyond the closest perpendicular steel reinforcing bar.

(2) Tank bottoms shall be reinforced with a minimum of seven (7) sections of three-eighths (3/8) inch diameter steel reinforcing bars oriented perpendicular to the tank sidewalls beginning at the center spaced twelve (12) inches apart. -The length of the perpendicular reinforcing bars shall be of sufficient length to extend two (2) inches into the sidewall.

(3) The tank perimeter walls shall be reinforced with three-eighths (3/8) inch diameter steel reinforcing bars located one (1) inch from the tank's top and bottom section seams.

(4) The tank walls and bottom thickness shall be at least two and one-half (2½) inches, and top thickness shall be at least three (3) inches.

(5) All reinforcing wire and rods must be covered by at least one-half (1/2) inch of concrete.

(6) Fiber products used with this reinforcement design must be added during the mixing process in order to achieve even distribution throughout the concrete mixture.

(7) Fiber length must range from at least one (1) to no more than two (2) inches.

(8) The fiber must be specifically manufactured for use as a concrete secondary reinforcement and be a polypropylene fibrillated (two-dimensional fiber mesh network) material.

(9) An acceptable vibration method shall be employed in the construction of the tank to prevent voids in the tank walls, bottom, and top.

~~800 APPENDIX U FIBERGLASS REINFORCED PLASTIC TANKS STANDARD~~504. Fiberglass Reinforced Plastic Tanks Standard.

Standards describing fiberglass reinforced plastic septic tanks have been adopted ~~assure~~to ensure a quality product of sufficient strength and resistance, capable of fulfilling its intended purpose. -Many of these standards were derived from NBS Voluntary Product Standard PS 15-69, which covers custom contact-molded reinforced polyester chemical resistant process equipment.

~~800.1 GENERAL REQUIREMENTS~~504.1. General Requirements.

The following general requirements are applicable to fiberglass reinforced plastic septic tanks as defined ~~herein~~within this regulation, and approved design standards and structural properties of the same shall be not less than those stated ~~herein~~.

(1) Material

Resins and sealants used in the tank manufacturing process shall be capable of effectively resisting corrosive influences of liquid components of sewage, gases generated by the digestion of sewage, and soil burial. -Materials used shall be formulated to withstand vibration, shock, normal household chemicals, earth, and hydrostatic pressure both when full and empty. -Not less than thirty (30) percent of the total weight of the tank shall be fiberglass reinforcement. For tanks not exceeding a fifteen hundred (1500) ~~gallons~~gallon liquid capacity, the minimum wall thickness shall be three-sixteenths (3/16) inch, provided, however, that isolated small spots may be as thin as eighty (80) percent of the minimum.

(2) Inner Coating

Internal surfaces shall be coated with an appropriate gel coating to provide a smooth, pore-free, watertight surface for fiberglass reinforced plastic parts.

(3) Physical Properties

Tanks shall be so constructed that all parts of the tank shall meet the following requirements:

(a) Ultimate Tensile Strength (Minimum) – Nine thousand (9,000) pounds per square inch (psi) when tested in accordance with ASTM D 638-71a, Standard Method of Test for Tensile Properties of Plastics.

(b) Flexural Strength (Minimum) – Sixteen thousand (16,000) psi when tested in accordance with ASTM D 790-71, Standard Method of Test for Flexural Properties of Plastics.

(c) Flexural Modulus of Elasticity Tangent (Minimum) – Seven hundred thousand (700,000) psi when tested in accordance with ASTM D 790-71, Standard Method of Test for Flexural Properties of Plastics.

(4) Watertight Integrity

Tanks shall be so constructed as to be watertight for the designed life of the tank. -Lids or covers shall be sufficiently tight when installed to preclude the entrance of surface or ground water into the tank.

(5) Longevity

Proof from an independent testing laboratory shall be submitted substantiating a minimum life expectancy of twenty years of service for the intended use of the tank and appurtenant components such as necessary sealants, connective fastenings, resins, etc.

(6) Safety

As a safety measure, provisions g shall be made in the construction of septic tank lids or covers to preclude unauthorized entry or removal when the use of the tank necessitates positioning of access openings at or above ground level.

(7) Workmanship

Tanks shall be of uniform thickness and free from defects that may affect their serviceability or durability. Completed tanks ~~are to present~~ shall have a smooth inside finish free of spills, pits, and honeycombs. -Plant quality control shall be sufficient to maintain a high degree of uniformity in tank quality.

~~800.2 SPECIFIC REQUIREMENTS~~ 504.2. Specific Requirements.

Specific requirements for design and construction shall be not less than those specified herein; and shall be in conformity with recognized National Standards for design and construction and in accordance with this regulation.

~~800.3 CAPACITY AND DESIGN LIMITS~~ 504.3. Capacity and Design Limits.

(1) Dimensions

- (a) The inside length of a horizontal cylindrical tank shall be at least two (2) but not more than three (3) times the width.
- (b) The uniform liquid depth shall not be less than four (4) feet.
- (c) At least fifteen (15) percent of the total volume of the tank shall be above the liquid level.
- (d) If tanks of other shapes are proposed, specifications must be submitted to the ~~Division of Onsite Wastewater Management~~ Department for approval.

(2) Inlet

- (a) Provisions shall be made for the building sewer to enter the center of one end of the septic tank two (2) inches above the normal liquid level of the tank.
- (b) A tee shall be constructed as an integral part of the tank to receive the building sewer, or as an alternative, an integrally constructed baffle may be used.
- (c) If baffles are used, suitable integrally fitted sleeves or collars shall be provided in the inlet openings of the tank to provide surface areas sufficient to ensure capability of watertight bonding between the tank and the inlet sewer.
- (d) If the tee or baffle is constructed of plastic material, it shall meet NSF Standard #14 for drain, waste, and vent system application.
- (e) If fiberglass reinforced plastic is used, it shall be of the same constituency as material of which the tank is constructed.
- (f) The inlet tee ~~of~~ or baffle shall extend sixteen (16) inches below the designed liquid level and be placed and secured in a vertical position so as to be watertight and preclude dislodgement during installation, operation, or maintenance activities.

(3) Outlet

- (a) Provisions shall be made for the outlet sewer to receive the discharge from the tank by providing an opening in the center of the end of the tank opposite the inlet, the invert elevation of which shall be at the liquid level of the tank.
- (b) A tee shall be constructed as an integral part of the tank to connect to the outlet sewer; or, as an alternative, an integrally constructed baffle may be used.
- (c) If baffles are used, suitable integrally fitted sleeves or collars shall be provided in the outlet opening of the tank to provide surface areas sufficient to ensure capability of water-tight bonding between the tank and the outlet sewer.
- (d) If the tee or baffle is constructed of plastic material, it shall meet NSF Standard #14 for drain, waste, and vent system application.

(e) If fiberglass reinforced plastic is used, it shall be of the same constituency as material of which the tank is constructed.

(f) The outlet tee or baffle shall extend eighteen inches below the design liquid level and be placed and secured in a vertical position so as to be watertight and preclude dislodgement during installation, operation, or maintenance activities.

(g) A one-~~(1)-inch~~ (1)-inch opening between the top of the inlet tee and top of the tank shall be provided to permit free passage of gas back to the house vent.

(4) Access Openings

Openings in the top of the septic tank shall be provided over the inlet and outlet tees or baffles with sufficient area to enable maintenance service to such tees or baffles.

(5) Identifying Markings

Fiberglass septic tanks shall be provided with a suitable legend, cast or stamped into the wall at the outlet end, and within six inches of the top of the tank, identifying the manufacturer, and indicating the liquid capacity of the tank in gallons.

~~900 APPENDIX V THERMOPLASTIC TANKS STANDARD~~ **505. Thermoplastic Tanks Standard.**

(1) The Department shall approve plans for thermoplastic tanks on an individual basis.

(a) Thermoplastic tanks shall be certified by an accredited third-party to comply with the most recent edition of IAPMO/ANSI Z1000 or CSA B66.

(b) The uniform liquid depth shall be at least three (3) feet.

(c) The inside length of the tank shall be at least two (2) times the inside width of the tank.

(2) If thermoplastic tanks having other dimensional characteristics are proposed, specifications must be submitted to the ~~Division of Onsite Wastewater Management~~ Department for approval, and the proposed design must be demonstrated to provide equivalent effectiveness for storage and distribution to that of concrete or thermoplastic tanks described in this regulation.

(3) Thermoplastic tank manufacturers must renew their product approvals by submitting new applications and plans to the Department every five (5) years and before changing any previously approved plans.

600. License to Clean Onsite Wastewater Systems, Self-Contained Toilets, and Other Sewage Holding Systems (i.e., Licensing of Pumper/Haulers).

600.1. No person shall be responsible for the cleaning of onsite wastewater systems, self-contained toilets, and other sewage holding systems in South Carolina without first applying for, receiving, and subsequently maintaining a valid license to conduct such activities as herein required by the Department. This includes, but is not limited to, nonwater-carried sewage treatment devices and gray water subsurface reuse system.

600.2. Licenses, Applications, and Fees.

(1) License applications, on forms approved by the Department, shall be submitted to the Department's regional environmental office which covers the county where the applicant's primary place of business is located; persons whose primary place of business is out of state must submit their applications to the Department's regional environmental office where it is reasonably anticipated the bulk of the activities sought to be licensed would occur.

(2) The following shall apply to applications submitted by persons engaged in the business of cleaning onsite wastewater systems, self-contained toilets, and other sewage holding systems:

(a) The applicant shall list on the application form each approved septage and sewage disposal facility they intend to use. Written verification of permission to use each disposal facility shall accompany the application.

(b) The applicant shall list on the application form all locations where pumping and transporting vehicles are parked/stored when not in use.

(c) For each annual renewal of an existing license, the person seeking renewal shall submit changes to any information included on the original license application to the Department through an updated application.

(d) Upon request by the Department, each person seeking a new license or renewal of an existing license shall make available for inspection all vehicles and equipment used in the pumping and transporting of septage and sewage.

(e) Additional inspections of vehicles and equipment may be conducted by the Department to ensure compliance with this regulation.

(f) If a licensee replaces, deletes, or adds to their inventory of vehicles used in pumping and transporting septage or sewage, the licensee shall immediately notify the Department for the purpose of updating their application. A vehicle may not be placed into use without prior inspection and approval from the Department.

(3) Prior to receipt of a license authorizing a person to be responsible for the cleaning of onsite wastewater systems, self-contained toilets, and other sewage holding systems, applicants shall complete an examination demonstrating their knowledge and comprehension of this regulation. Any applicant failing to satisfactorily complete the licensing examination may be eligible to retake the examination after thirty (30) calendar days. Applicants who fail to satisfactorily complete their second examination may then be allowed to retake subsequent examinations after a sixty (60)-day waiting period.

(4) A fee shall be assessed for a new license and for the annual renewal of a license.

(a) No person who seeks to be responsible for the cleaning of onsite wastewater systems, self-contained toilets, and other sewage holding systems shall be issued a new license pursuant to this regulation until a fee of one hundred dollars (\$100.00) has been paid to the Department, except that a person applying both for this license (i.e., pumper/hauler license) and an installers license (i.e., license to construct or repair systems) shall pay a fee of only fifty dollars (\$50.00) for the license to clean onsite wastewater systems, self-contained toilets, and other sewage holding systems.

(b) Every license issued by the Department under this regulation shall be valid for a period of one (1) year, unless otherwise suspended or revoked.

(c) Each licensee must pay an annual renewal fee of one hundred dollars (\$100.00), except that a person applying to renew both this license (i.e., pumper/hauler license) and an installers license (i.e., license to construct or repair systems) shall pay a fee of only fifty dollars (\$50.00) for the renewal of the license to clean onsite wastewater systems, self-contained toilets, and other sewage holding systems.

(d) Annual renewal fees shall be due on a date not less than thirty (30) calendar days from the billing date. A penalty charge of thirty dollars (\$30.00) shall be assessed for license fees that are past due. A second penalty of thirty dollars (\$30.00) shall be assessed for license fees sixty (60) days past due.

(e) Expiration of a license shall occur when the license fee is ninety (90) calendar days past due. No person with an expired license may be engaged in the business of cleaning onsite wastewater systems, self-contained toilets, and other sewage holding systems.

(f) An expired license shall not be renewed. Any person with an expired license may apply for a new license and must meet all applicable requirements for a new license.

(5) Licenses issued in accordance with this regulation shall not be transferable.

600.3. Further Governmental Restriction Not Prohibited.

Nothing within this regulation shall be construed to limit the power of any municipal, county, or governmental entity to enforce other license requirements or additional measures for the restrictions of persons cleaning onsite wastewater systems, self-contained toilets, and other sewage holding systems.

600.4. License Not Required.

Public or private sewer providers using pumping and transporting vehicles for the sole purpose of maintaining their sewer systems shall be exempt from the licensing requirements of Section 600 of this regulation. This exemption does not apply to public or private sewer providers using pumping and transporting vehicles to provide cleaning services to the public.

601. Vehicles, Equipment, and Practices.

601.1. All vehicles and equipment used to remove and transport septage and sewage shall be maintained in a manner that will prevent the occurrence of leaks, spills, and other nuisance conditions. All vehicles shall be properly identified.

(1) Hoses, valves, tanks, and other equipment must be maintained in good repair and working order.

(2) All vehicles used to transport septage and sewage must bear the company name and license number in a prominent place on the sides and rear of each vehicle, using letters and numbers that are at least four (4) inches in height.

601.2. The cleaning of septic tanks and similar units and the pumping and transporting of septage and sewage shall be done in a manner that is safe and does not create a hazard to the public health and the environment. The proper cleaning of any septic tank or similar unit shall include the substantial removal of its contents (solids, semi-solids, and liquids).

601.3. Disposal of septage and sewage shall be allowed only at facilities approved by the Department. A licensee may dispose of septage and sewage only at those approved facilities designated by the licensee's application and any renewals or updates of the application.

(1) Discharge of septage and sewage shall be allowed only at those specific locations designated by the owners/operators of approved disposal facilities.

(2) Discharge of septage and sewage into a public sewage collection system, without the consent and permission of the owner/operator of such system, is prohibited.

(3) The storage of domestic wastewater, sewage, or septage in underground or partially buried tanks/subsurface containment units, is prohibited.

601.4. A licensee shall adequately supervise employees and ensure that onsite wastewater systems, self-contained toilets, and other sewage holding systems are cleaned in accordance with this regulation and other applicable regulations, permits, and standards issued by the Department.

602. Records of Operation.

602.1. Each person licensed to clean onsite wastewater systems, self-contained toilets, and other sewage holding systems is required to maintain accurate records of cleaning and transporting activities.

(1) Records shall be kept current and shall include at least the following information for each cleaning/transporting activity:

(a) Date and time of septage and sewage removal.

(b) Name and address of residence or facility where septage and sewage was removed. Where one or more self-contained toilets are cleaned at one location (e.g., construction site, special event, etc.), one recorded entry per location will be acceptable.

(c) Quantity and type of septage and sewage removed (e.g., grease trap, septic tank, self-contained toilet, etc.). Where one or more self-contained toilets are cleaned at one location, quantity may be expressed by the total number of units cleaned at that location.

(d) Date, time, and location of septage and sewage disposal.

602.2. Records shall be made available for inspection by the Department upon request. All licensees must retain their records for a minimum of two (2) years.

700. License to Construct or Repair Onsite Wastewater Systems (i.e. Licensing of Installers).

700.1. License Requirements and Fees.

(1) No person shall be responsible for the construction or repair of onsite wastewater systems in South Carolina without first applying for, receiving, and subsequently maintaining a valid license to conduct such activities as herein required by the Department, provided that a person may construct or repair an onsite wastewater system for personal use at the person's residence without obtaining a license.

(2) Licenses, Applications, and Fees

(a) License applications, on forms approved by the Department, shall be submitted to the Department's regional environmental office which covers the county where the applicant's primary place of business is located; persons whose primary place of business is out of state must submit their applications to the Department's regional environmental office where it is reasonably anticipated the bulk of the activities sought to be licensed would occur.

(b) Prior to receipt of a license authorizing a person to be responsible for the construction or repair of an onsite wastewater system, the applicant shall complete an examination demonstrating the applicant's knowledge and comprehension of this regulation. Any applicant failing to satisfactorily complete the licensing examination may be eligible to retake the examination after thirty (30) calendar days. Applicants who fail to satisfactorily complete their second examination may then be allowed to retake subsequent examinations after a sixty (60) calendar day waiting period.

(c) Each license requires fees for the initial license issuance and annual renewal. The required fees vary depending on the tier of licensure sought. The required initial license and renewal fees for each tier are as follows:

(i) Tier 1 – One hundred dollar (\$100.00) fee

(ii) Tier 2 – One hundred dollar (\$100.00) fee

(iii) Tier 3 – Two hundred dollar (\$200.00) fee

(d) Every license issued by the Department under this regulation shall be valid for a period of one (1) year, unless otherwise suspended or revoked.

(e) Renewal fees shall be due on a date not less than thirty (30) calendar days from the billing date. A penalty charge of thirty dollars (\$30.00) shall be assessed for license fees that are past due. A second penalty of thirty dollars (\$30.00) shall be assessed for license fees sixty (60) days past due.

(f) Expiration of a license shall occur when the license fee is ninety (90) calendar days past due. No person with an expired license may be engaged in the business of constructing and repairing onsite wastewater systems, sewage holding systems, or self-contained toilets.

(g) An expired license shall not be renewed. Any person with an expired license may apply for a new license and must meet all applicable requirements for a new license.

(h) Licenses issued in accordance with this regulation shall not be transferable.

(3) Further Governmental Restriction Not Prohibited

Nothing within this regulation shall be construed to limit the power of any municipal, county, or governmental entity to enforce other license requirements or additional measures for the restrictions of persons constructing or repairing onsite wastewater systems.

(4) Eligibility

Only a person who meets the following criteria is eligible to be licensed as an onsite wastewater systems installer:

(a) Applicants to be a Tier 1 or Tier 2 installer must:

(i) Pass an examination administered by the Department with a minimum score of eighty (80) percent ; and

(ii) Submit a properly completed application with supporting documents including proof of continuing education units (CEUs) for any renewal; and

(iii) Pay applicable fees.

(b) Applicants to be a Tier 3 installer must:

(i) Qualify as either:

(A) A licensed onsite wastewater system installer who has been actively installing for three (3) years immediately preceding the date of application with no pending or prior disciplinary or enforcement action involving onsite wastewater system contracting; or

(B) An onsite wastewater system installer licensee from another state with affidavits from the regulatory authority demonstrating five (5) years of experience with no pending or prior disciplinary or enforcement action involving onsite wastewater system contracting; and

(ii) Pass an examination administered by the Department with a minimum score of eighty (80) percent;

(iii) Submit a properly completed application with supporting documents (if required);

(iv) Submit proof of continuing education units (CEUs) for any renewal;

(v) Submit proof of required Bond and insurance coverage; and

(vi) Pay applicable fees.

701. Continuing Education and Training.

701.1. All installers are required to complete the necessary number of continuing education units (CEUs) every two (2) years from the date of licensing to renew the installer license. CEUs must be obtained from the Department-approved list of courses and providers.

701.2. The Department will not renew a license for any installer who has failed to meet the training and education requirements for the previous licensing period.

701.3. If any installer completes more than the required hours in a licensing period, as many as three (3) hours can be rolled over and credited to the requirement for the next licensing period.

701.4. The required CEUs for each Tier for every two (2) year licensing period are as follows:

(1) Tier 1: Eight (8) hours

(2) Tier 2: Twelve (12) hours

(3) Tier 3: Eighteen (18) hours

701.5. Implementation of CEU Requirement.

The requirement for CEUs will enter into effect for any initial or renewal licensing period beginning on or after the date three (3) years following the effective date of this regulation.

702. Practice, Procedure, and Quality Control.

702.1. Practices: All Installers.

(1) A licensee shall adequately supervise employees and ensure that all onsite wastewater systems for which the licensee is responsible are constructed and repaired in accordance with this regulation and other applicable regulations, permits, and standards issued by the Department. Onsite wastewater systems must be installed pursuant to and in compliance with permits to construct issued by the Department.

(2) An installer does not have the authority to make any changes to a construction or repair project that deviate from an issued permit without first obtaining Department approval.

(3) Installers do not have the authority to subcontract unlicensed installers to conduct work under their licenses.

(4) The specific scope of activities authorized under each tier of licensure is set forth in this regulation's definition of "licensed onsite wastewater system installer." A licensed installer is prohibited from performing any construction or repair that is inconsistent with the scope of activities authorized under the licensee's applicable tier.

702.2. Onsite Wastewater System Installer Self-Inspections.

(1) All Tier 3 installers and Tier 1 or Tier 2 installers directed to perform self-inspections under Section 104.3(1)(c) shall provide the Department the opportunity to perform a final inspection and shall arrange with the Department in advance a time for the final inspection of an onsite wastewater system that is being installed. If, after thirty (30) minutes of that arranged time, the Department representative has not arrived for the inspection, the installer shall:

(a) Inspect the system;

(b) Record the findings on a form approved by the Department; and

(c) Cover the system.

(2) It shall be considered a violation of this regulation to conduct a self-inspection of a system or cover a system without first scheduling a final inspection time with the Department and waiting the full thirty (30) minutes of the arranged time for the Department to conduct a final inspection.

(3) The installer shall not cover a system or seek Department final approval for a system that, upon inspection, is determined not to be in compliance with the permit to construct.

(4) Documentation of system installation and self-inspection using the Department-approved format, including the installer's signature and license number, as well as the system measurements and other specified information, shall be submitted to the Department within two (2) business days of the final self-inspection date. A copy of this document(s) must also be furnished to the property owner for whom the

system was installed. Failure to submit to the Department the required documentation within the required timeframe shall be considered a violation of this regulation.

(5) An onsite wastewater system shall not be placed into operation unless and until the Department has issued a final approval to operate.

702.3. Quality Control: Installers.

The Department will conduct random final inspections on no less than three (3) percent annually of the total number of systems installed during the preceding fiscal year. The Department will also conduct field reviews of final installation and inspection documentation submitted by the installer and compare them to the actual installations those documents represent.

703. Bonding and Insurance Requirements: Tier 3 Installers.

703.1. Proof of both insurance and bond coverage shall be furnished to the Department prior to licensure as a Tier 3 installer and upon license renewal.

703.2. An onsite wastewater system Tier 3 installer shall be responsible for obtaining and maintaining both insurance and bond coverage for as long as the installer is licensed as a Tier 3 installer.

703.3. Failure to maintain both insurance and bond coverage shall result in the suspension or revocation of the Tier 3 installer license.

704. Transition to Tiered Licensure.

Upon the effective date of the tiered licensure provisions (Section 700) of this regulation, all installers licensed as master contractors under the previous R.61-56.2 shall be considered to hold a Tier 3 license, and all other installers licensed under the previous R.61-56.1 shall be considered to hold a Tier 2 license. The Tier 3 or Tier 2 license shall expire upon the original expiration date of the license held under R.61-56.1 or R.61-56.2, as applicable, unless the license is renewed in accordance with the provisions of Section 700.1 of this regulation.

800. Enforcement.

800.1. Violations of this regulation shall be punishable in accordance with S.C. Code Sections 44-1-150, 44-55-825, 48-1-320, and 48-1-330. The Department may seek enforcement, suspend and revoke permits and licenses, issue civil penalties, and order corrective action in accordance with law. The Department shall have the authority to suspend civil penalties if the violations of this regulation are corrected in a period of time established by the Department.

800.2. Deviation from the installation design and conditions in onsite wastewater permits to construct and approvals to operate may be considered a violation of this regulation.

800.3. Suspension and revocation of permits to construct and approvals to operate an onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system.

(1) The Department may temporarily suspend a permit to construct or approval to operate for a violation of this regulation.

(2) The Department may revoke a permit to construct or approval to operate for a violation of this regulation. The Department will revoke a permit or approval when:

(a) The onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system is malfunctioning and sewage is discharging to the ground or the groundwater, the holder of the permit has received notice that the system is malfunctioning, the Department has given notice that repairs must be made within a reasonable period of time, the holder of the permit has not made the repairs, and the system continues to discharge sewage to the ground or the groundwater; or

(b) The onsite wastewater system, nonwater-carried sewage treatment system, wastewater combustion system, or gray water subsurface reuse system is malfunctioning and sewage is discharging to the ground or the groundwater, the holder of the permit has received notice that the system is malfunctioning, the Department has given notice that a wastewater treatment facility is accessible for connection.

800.4. Enforcement against persons licensed to construct, clean, and/or repair onsite wastewater systems.

(1) A licensee shall be subject to suspension, revocation, and civil penalties as provided in Sections 800.1 and 800.4(2) for the construction, cleaning, or repair of onsite wastewater systems, self-contained toilets, and other sewage holding systems in violation of state laws, regulations, and standards.

In determining whether a license should be suspended or revoked, the Department may consider such factors as the seriousness of a violation and whether a violation is a repeat of previous violations, among any other relevant factors. The interference by a licensee or their employees with a representative of the Department in performing their duties with respect to this regulation shall constitute grounds for revocation of license.

(2) Violation of an onsite wastewater system installation permit or any provisions of this regulation by a licensed onsite wastewater system installer or person licensed to clean onsite wastewater systems must be enforced as follows:

(a) First offense violations may be enforced under S.C. Code Section 44-1-150 or by suspension of the license for a period not to exceed one (1) year.

(b) Second offense violations shall be enforced under S.C. Code Section 44-1-150 or by suspension of the license for a period not to exceed three (3) years.

(c) Third offense violations shall be enforced under S.C. Code Section 44-1-150 or by permanent revocation of the license.

(3) The Department may suspend licenses for failure to pay a civil penalty required pursuant to a Department order.

800.5. Prior to suspending or revoking a permit to construct, approval to operate, or license, the Department shall provide written notification to the person stating the basis for suspension or revocation. A permit to construct, approval to operate, or license may be summarily suspended by the Department without prior warning if the Department determines there is an immediate threat to public health.

801. Severability Clause.

Should any section, paragraph, sentence, clause, or phrase of this regulation be declared unconstitutional or invalid for any reason, the remainder of this regulation shall not be affected thereby.

~~61-56.1. — License to Construct or Clean Onsite Sewage Treatment and Disposal Systems and Self-Contained Toilets.~~

~~SECTION I. — PURPOSE~~

~~To regulate persons engaged in the business of constructing, repairing, or cleaning onsite sewage treatment and disposal systems and cleaning self-contained toilets, to protect public health and the environment.~~

~~SECTION II. — DEFINITIONS~~

~~— A. Cleaning — the removal and transportation of septage from an onsite sewage treatment and disposal system or self-contained toilet to an approved disposal location.~~

~~— B. Construct — the installation or repair of an onsite sewage treatment and disposal system.~~

~~— C. Department — the South Carolina Department of Health and Environmental Control and its authorized representatives.~~

~~— D. License — the official document issued by the Department authorizing a person to be engaged in the business of construction, repair, or cleaning of onsite sewage treatment and disposal systems or the cleaning of self-contained toilets.~~

~~— E. Onsite Sewage Treatment and Disposal System — a system, or any part of a system, designed to treat and dispose of, or store sewage. Examples include septic tank systems, sewage holding systems, and similar devices.~~

~~— F. Person — any individual, firm, company, corporation, or association.~~

~~— G. Revocation — the permanent withdrawal of rights and privileges granted by a license.~~

~~— H. Self-Contained Toilet — a single or multiple unit toilet and holding tank combination.~~

~~— I. Septage — the mixture of solids and liquids removed during cleaning of a septic tank, grease trap, or any other part of an onsite sewage treatment and disposal system, holding system, or self-contained toilet which receives domestic sewage; includes the liquid, solid and semi-solid materials which settle to the bottom of transport containers.~~

~~— J. Sewage — any liquid waste containing animal, vegetable, or chemical matter in suspension or solution from water closets, urinals, lavatories, bathtubs, laundry tubs or devices, floor drains, drinking fountains or other water-using fixtures.~~

~~— K. Suspension — the temporary or indefinite withdrawal or cessation of rights and privileges granted by a license.~~

~~SECTION III. — LICENSE REQUIRED~~

~~— A. No person may engage in the business of and be responsible for the construction, repair, or cleaning of onsite sewage treatment and disposal systems or the cleaning of self-contained toilets in South Carolina~~

without first applying for, receiving, and subsequently maintaining a valid license to conduct such activities, as herein required by the Department; provided, that a person may construct or repair an onsite sewage treatment and disposal system for personal use at his residence without obtaining a license.

~~— B. Licenses, Applications, and Fees.~~

~~—— 1. License applications, on forms approved by the Department, shall be submitted to the Department in the county where the applicant's primary place of business is located; provided, persons residing out of state must submit their applications to the Department in the South Carolina county where it is reasonably anticipated the bulk of the activities sought to be licensed would occur.~~

~~—— 2. The following shall apply to applications submitted by persons engaged in the business of cleaning onsite sewage treatment and disposal systems or self-contained toilets:~~

~~—— a. The applicant shall list on the application form each approved septage disposal facility they intend to use. Written verification of permission to use each disposal facility shall accompany the application.~~

~~—— b. For each renewal of an existing license, the person seeking renewal shall submit to the Department an updated application.~~

~~—— c. Upon request by the Department, each person seeking a new license or renewal of an existing license shall make available for inspection all vehicles and equipment used in the pumping and transporting of septage.~~

~~—— d. Additional inspections of vehicles and equipment may be conducted by the Department to ensure compliance with this regulation.~~

~~—— e. If a licensee replaces, deletes, or adds to his inventory of vehicles used in pumping and transporting septage, the licensee shall immediately notify the Department for the purpose of updating his application.~~

~~—— 3. Prior to receipt of a license authorizing a person to engage in the business of and be responsible for the construction or repair of an onsite sewage disposal system, the applicant shall complete an examination, demonstrating his knowledge and comprehension of the onsite sewage treatment and disposal regulation (Regulation 61-56, 1976 Code of Laws of South Carolina, as amended). Any applicant failing to satisfactorily complete the licensing examination may be eligible to retake the examination after 30 days. If the applicant fails to satisfactorily complete his second examination, he may then be allowed to retake subsequent examinations after a 60-day waiting period.~~

~~—— 4. Persons engaged only in the business of cleaning onsite sewage treatment and disposal systems, holding systems, or self-contained toilets, shall be exempt from the aforementioned examination, and shall be issued a license upon satisfactory compliance with this regulation.~~

~~—— 5. A fee shall be assessed for a new license and for the annual renewal of license.~~

~~—— a. No person engaged in the business of either constructing and repairing or the cleaning of onsite sewage treatment and disposal systems shall be issued a new license pursuant to this regulation until a fee of one hundred (\$100) dollars has been paid to the Department; provided, persons engaged in the dual business of constructing/repairing and cleaning systems shall pay a fee of one hundred fifty (\$150) dollars.~~

~~Every license issued by the Department under this regulation shall be valid for a period of one year, unless otherwise suspended or revoked.~~

~~_____ b. Each licensee must pay an annual renewal fee of one hundred (\$100) dollars, or, for a dual license, one hundred fifty (\$150) dollars, to the Department.~~

~~_____ c. Annual renewal fees shall be due on a date not less than thirty (30) days from the billing date. A penalty charge of \$30.00 shall be assessed for license fees that are past due. A second penalty of \$30.00 shall be assessed for license fees sixty (60) days past due.~~

~~_____ d. Expiration of a license shall occur when the license fee is ninety (90) days past due. No person with an expired license may be engaged in the business of either constructing and repairing or cleaning onsite sewage treatment and disposal systems, sewage holding systems, or self-contained toilets.~~

~~_____ e. an expired license shall not be renewed. Any person with an expired license may apply for a new license and must meet all applicable requirements for a new license.~~

~~_____ 6. Licenses issued in accordance with this regulation shall not be transferable.~~

~~_____ C. Further Governmental Restrictions Not Prohibited.~~

~~Nothing within this regulation shall be construed to limit the power of any municipal, county, or governmental entity to enforce other license requirements or additional measures for the restrictions of persons constructing, repairing, or cleaning onsite sewage treatment and disposal systems or cleaning self-contained toilets.~~

~~SECTION IV. VEHICLES, EQUIPMENT, AND PRACTICES~~

~~_____ A. All vehicles and equipment used to remove and transport septage shall be maintained in a manner that will prevent the occurrence of leaks, spills, and other nuisance conditions. All vehicles shall be properly identified.~~

~~_____ 1. Hoses, valves, tanks, and other equipment must be maintained in good repair and working order.~~

~~_____ 2. All vehicles used to transport septage must bear the company name and license number in a prominent place on the sides and rear of each vehicle, using letters and numbers that are at least four (4) inches in height.~~

~~_____ B. The cleaning of septic tanks and similar units, and the pumping and transporting of septage shall be done in a manner that is safe and does not create a nuisance or health hazard. The proper cleaning of any septic tank or similar unit shall include the substantial removal of its contents.~~

~~_____ C. Disposal of septage shall be allowed only at facilities approved by the Department. A licensee may dispose of septage only at those approved facilities designated by his application and any renewals or updates of his application.~~

~~_____ 1. Discharge of septage shall be allowed only at those specific locations designated by the owners/operators of approved disposal facilities.~~

~~_____ 2. Discharge of septage into a public sewage collection system, without the consent and permission of the owner/operator of such system, is prohibited.~~

~~— D. A licensee shall adequately supervise employees and ensure that all systems for which the licensee is responsible shall be constructed, repaired, and cleaned in accordance with Regulation 61-56 and other applicable regulations, permits, and standards issued by the Department.~~

~~SECTION V. RECORDS OF OPERATION~~

~~— A. Each person licensed to clean onsite sewage treatment and disposal systems and self-contained toilets is required to maintain accurate, written records of cleaning and transporting activities.~~

~~— 1. Records shall be kept current and shall include at least the following information for each cleaning/transporting activity:~~

~~— a. Date and time of septage removal.~~

~~— b. Name and address of residence or facility where septage was removed. Where one or more self-contained toilets are cleaned at one location (construction site, special event, etc.), one recorded entry per location will be acceptable.~~

~~— c. Quantity and type of septage removed (i.e., grease trap, septic tank, self-contained toilet). Where one or more self-contained toilets are cleaned at one location, quantity may be expressed by the total number of units cleaned at that location.~~

~~— d. Date, time, and location of septage disposal.~~

~~— B. Records shall be made available for inspection by the Department upon request. Records must be retained for a minimum of two (2) years.~~

~~SECTION VI. SUSPENSION/REVOCATION OF LICENSE~~

~~— A. A licensee shall be subject to suspension and revocation of license and to penalties, as provided in Section VIII for the construction, repair, or cleaning of onsite sewage treatment and disposal systems, or cleaning of self-contained toilets for which he is responsible in violation of State Laws, Regulations, and Standards.~~

~~In determining whether a license should be suspended or revoked, the Department may consider such factors as the seriousness of a violation and whether a violation is a repeat of previous violations, among any other relevant factors. The interference by a licensee or his employees with a representative of the Department in performing his duties with respect to this regulation shall constitute grounds for revocation of license. Only the person responsible for supervision and enforcement of this regulation in each county or health district is authorized to initiate action to revoke the license on the grounds of interference.~~

~~— B. Any person whose license is revoked shall not be eligible to apply for relicensing within one year from the date of revocation. Any person whose license has previously been revoked and who obtains a subsequent license and violates the provisions of this regulation, which results in the revocation of his license for the second time, shall not be granted another license.~~

~~— C. Prior to such action, the Department shall provide written notification to the licensee, stating the basis for suspension or revocation, and advise the licensee that the license shall be suspended or revoked on the fifteenth (15th) day following receipt of the written notification, unless a Petition for Administrative Review, complying with the requirements of Regulation 61-72, is filed with the Department, within fifteen~~

~~(15) days of receipt. All hearings shall be conducted in accordance with the Administrative Procedures Act and Regulation 61-72.~~

~~—D. A license may be summarily suspended by the Department pending a hearing, as herein provided, if the licensee acts in such a manner as to pose an immediate threat to public health. In the case of a summary suspension, the licensee shall be given a hearing as soon as possible after the Department receives a written request for a hearing.~~

~~SECTION VII. EXPIRATION OF LICENSE~~

~~The expiration of a license due to failure to pay the required annual renewal fee, plus applicable late charges, shall not constitute a contested case and shall not create a right to a hearing pursuant to the South Carolina Administrative Procedures Act.~~

~~SECTION VIII. PENALTIES~~

~~Violations of this regulation shall be punishable in accordance with Sections 44-1-150, 48-1-320, and 48-1-330, of the 1976 Code of Laws of South Carolina, as amended.~~

~~SECTION IX. SEVERABILITY CLAUSE~~

~~Should any section, paragraph, sentence, clause or phrase of this regulation be declared unconstitutional or invalid for any reason, the remainder of said regulation shall not be affected thereby. [Repealed].~~

~~61-56.2. Licensing Of Onsite Wastewater System Master Contractors.~~

~~CONTENTS~~

~~100. PURPOSE~~

~~200. DEFINITIONS~~

~~300. ELIGIBILITY~~

~~400. CONTINUING EDUCATION AND TRAINING~~

~~500. PRACTICE, PROCEDURE AND QUALITY CONTROL~~

~~600. BONDING AND INSURANCE REQUIREMENTS~~

~~700. APPLICATION AND LICENSE FEES~~

~~800. ENFORCEMENT~~

~~900. SEVERABILITY CLAUSE~~

~~100. PURPOSE~~

~~The purpose of this regulation is to protect public health and the environment by ensuring the competence of onsite wastewater system master contractors. Proper construction, installation and approval practices for onsite wastewater systems are essential for the safe treatment and disposal of domestic wastewater.~~

~~200. DEFINITIONS~~

~~ALTERNATIVE SYSTEM—A system incorporating design modifications of the proposed subsurface wastewater infiltration area (drainfield) or absorption trench geometry for the purpose of achieving compliance with required setbacks and offset to the zone of saturation and/or restrictive horizons. No such system shall be utilized unless the Department has established a specific standard.~~

~~ALTERNATIVE TILEFIELD PRODUCTS—Products specifically designed to replace or eliminate the aggregate typically utilized in soil absorption trenches. Such products must be approved for use by the Department and must adhere to required equivalency values established herein.~~

~~APPLICANT—A property owner, general contractor or agent representing the property owner, or a developer who seeks a permit to construct and operate an onsite wastewater system.~~

~~BOND—A sum of money set aside (Surety Bond) to insure completion of work under a contract.~~

~~CONVENTIONAL SYSTEM—An onsite wastewater system that utilizes a network of conventional absorption trenches installed in the naturally occurring soil for the treatment and disposal of domestic wastewater.~~

~~CONSTRUCT—The installation or repair of an onsite sewage treatment and disposal system.~~

~~DEPARTMENT—The South Carolina Department of Health and Environmental Control (DHEC).~~

~~DOMESTIC WASTEWATER—The untreated liquid and solid human body waste and the liquids generated by water using fixtures and appliances, including those associated with food service operations. For the purposes of this regulation, domestic wastewater shall not include industrial process wastewater.~~

~~EFFLUENT—The liquid discharged from a septic tank, effluent pump station, or other sewage treatment device.~~

~~EXISTING SYSTEM—An onsite wastewater system, which has received final construction approval or has been serving a legally occupied residence or structure.~~

~~FAILING ONSITE WASTEWATER SYSTEM—An onsite wastewater system that is discharging effluent in an improper manner or has ceased to function properly.~~

~~LICENSE—The official document issued by the Department authorizing a person to provide services for installation, repair, modification or final inspection and approval of onsite wastewater systems that they install.~~

~~LICENSED SEPTIC TANK CONTRACTOR—A person authorized under Regulation 61-56.1, License to Construct or Clean Onsite Sewage Treatment and Disposal Systems and Self-Contained Toilets, to construct, repair or clean onsite sewage disposal systems or self-contained toilets.~~

~~ONSITE WASTEWATER SYSTEM—A system, generally consisting of a collection sewer, septic tank(s), and soil absorption trenches (subsurface wastewater infiltration area), designed to treat and dispose of domestic wastewater through a combination of natural processes that ultimately result in effluent being transmitted through the soil, renovated, and ultimately discharged to groundwater.~~

~~ONSITE WASTEWATER SYSTEM MASTER CONTRACTOR—A person authorized under this regulation to construct, repair, modify, inspect and issue final construction approval for onsite wastewater systems that they install.~~

~~PERMIT—A written document issued by the Department authorizing the construction and operation of an onsite wastewater system under Regulation 61-56. The construction and operation permit survives the life of the onsite wastewater system that it authorizes.~~

~~REPAIR—Any work performed on an existing onsite wastewater system for the purposes of correcting a surface failure or other unauthorized discharge, enhancing system performance, or relocating the entire system or system components, provided there are no changes in use that would impact the existing system.~~

~~REVOCATION—The permanent withdrawal of rights and privileges granted by a license.~~

~~SEPTIC TANK—A watertight, covered receptacle designed and constructed to receive the discharge of domestic wastewater from a building sewer, separate solids from the liquid, digest organic matter, store digested solids through a period of detention and biological conditioning of liquid waste, and allow the effluent to discharge for final treatment and disposal.~~

~~SOIL ABSORPTION TRENCH—A trench installed in the naturally occurring soil that is utilized for the treatment and disposal of domestic wastewater. A conventional trench is characterized by the following: (a) at least twenty three (23) inches in depth; (b) thirty six (36) inches in width; (c) filled with aggregate so that at least six (6) inches is beneath the distribution pipe, with at least five (5) inches on both sides of the pipe, and at least three (3) inches covering the pipe; and (d) at least nine (9) inches of backfill. Other trench configurations are specified in Regulation 61-56 Appendices of Standards for Onsite Wastewater Systems.~~

~~STANDARD—A group of requirements developed by the Department that specifies the minimum site conditions and design criteria necessary for the approval of a specific type of onsite wastewater system (i.e., alternative system) that differs from a conventional system. A standard may also address minimum design criteria for certain components of onsite wastewater systems as well as methodologies for determining system sizing.~~

~~SUBSURFACE WASTEWATER INFILTRATION AREA (DRAINFIELD)—A specific area where a network of soil absorption trenches or other devices of sewage application are installed to provide the final treatment and disposal of effluent.~~

~~SURETY AGREEMENT—Through this agreement, the surety agrees to uphold—for the benefit of the obligee—the contractual promises (obligations) made by the principal if the principal fails to uphold its promises to the obligee.~~

~~SUSPENSION—The temporary or indefinite withdrawal of rights and privileges granted by a license.~~

~~300. ELIGIBILITY~~

~~An onsite wastewater systems contractor currently licensed under R. 61.56.1, who meets the following criteria, is eligible to be licensed as an onsite wastewater systems master contractor:~~

~~—(1) a licensed onsite wastewater systems contractor who has been actively installing for three (3) years immediately preceding the date of application with no disciplinary action pending involving septic tank contracting; or~~

~~—(2) an onsite wastewater systems contractor licensee from another state with affidavits from the regulatory authority supporting five (5) years of experience with no pending disciplinary action involving septic tank contracting; and~~

~~—(3) the ability to pass an examination administered by the Department with a minimum score of eighty percent (80 %); and~~

~~—(4) a properly completed application with supporting documents (if required); and~~

~~—(5) proof of required bond and insurance coverage; and~~

~~—(6) payment of applicable fees.~~

~~400. CONTINUING EDUCATION AND TRAINING~~

~~400.1. The master contractor will be required to complete six (6) contact hours of training and continuing education every year from the date of licensing to renew the master contractor license. The Department will provide a listing of approved training providers and courses to meet this requirement.~~

~~400.2. The master contractor who fails to meet the training and continuing education requirements will lose the rights and privileges granted under that license until such time as these requirements have been met.~~

~~400.3. If the master contractor fails to meet the training and education requirement within the next licensing period, the license will be considered void.~~

~~400.4. If a master contractor completes more than the required six (6) hours in a licensing period, as many as three (3) hours can be rolled over into the requirement for the next licensing period.~~

~~500. PRACTICE, PROCEDURE AND QUALITY CONTROL~~

~~500.1. Practice~~

~~—(1) Onsite wastewater systems installed and approved by master contractors must be installed pursuant to, and in compliance with, construction and operation permits issued by the Department.~~

~~—(2) The master contractor does not have the authority to change an issued permit without first obtaining Department approval.~~

~~—(3) A master contractor authorized under this regulation will be able to install, inspect and approve any system permitted by the Department under Regulation 61-56 that the master contractor installs himself except those systems designed by a Licensed Professional Engineer.~~

~~—(4) The master contractor, after giving the Department the opportunity to do a final inspection of the installed system, may record and document the necessary measurements on a form approved by the Department, issue final approval, and cover the installation.~~

~~—(5) The as-built drawings, along with the master contractor's signature and license number, must be submitted to the Department, with a copy being provided to the property owner for whom the system was installed.~~

~~500.2. Procedure~~

~~—(1) The master contractor shall arrange a time, for the final inspection of an onsite wastewater system that is being installed, with a representative of the Department. If, after thirty (30) minutes of that arranged time, the Department representative has not arrived for the inspection, the master contractor may:~~

~~—(a) inspect the system;~~

~~—(b) record the findings on a form approved by the Department;~~

- ~~—(c) grant final construction approval to the installation; and~~
- ~~—(d) cover the system.~~

~~—(2) The as built drawings containing the required measurements and other documentation shall be submitted to the Department no later than the close of business on the next business day. A copy of this document(s) must also be furnished to the property owner for whom the system was installed.~~

~~500.3. Quality Control~~

~~The Department is required to conduct random final inspections on no less than three percent (3%) annually of the total number of systems installed during the preceding fiscal year. The Department will also conduct field reviews of the as built drawings submitted by the master contractor compared with the actual installations those drawings represent.~~

~~600. BONDING AND INSURANCE REQUIREMENTS~~

~~600.1. Proof of both insurance and bond coverage shall be furnished to the Department prior to licensure as a master contractor and upon annual license renewal.~~

~~600.2. The onsite wastewater system master contractor shall be responsible for obtaining and maintaining both insurance and bond coverage for as long as the contractor is operating as a master contractor.~~

~~600.3. Failure to maintain both insurance and bond coverage shall result in the suspension or revocation of the master contractor license.~~

~~700. APPLICATION AND LICENSE FEES~~

~~700.1. The application fee for an onsite wastewater systems master contractor license shall be seventy five dollars (\$75.00); this fee must be submitted with the completed application. The application fee is non-refundable.~~

~~700.2. Upon successful completion of the application and examination requirements, each licensee shall pay a licensing fee of two hundred dollars (\$200.00).~~

~~700.3. The annual renewal fee for each license shall be two hundred dollars (\$200.00).~~

~~700.4. Failure to pay the annual renewal fee shall result in the suspension or revocation of the master contractor license.~~

~~700.5. Licenses issued in accordance with this regulation shall not be transferable.~~

~~800. ENFORCEMENT~~

~~800.1. Deviation from the installation design and conditions in onsite wastewater permits may be considered a violation of this regulation.~~

~~800.2. Violation of an onsite wastewater system installation permit, or any provisions of this regulation, by a master contractor, must be enforced in accordance as follows:~~

- ~~—(1) First offense violations may be enforced under S.C. Code Section 44-1-150 or by suspension of the installer's license for a period not to exceed one (1) year.~~

~~—(2) Second offense violations may be enforced under S.C. Code Section 44-1-150 or by suspension of the installer's license for a period not to exceed three (3) years.~~

~~—(3) Third offense violations may be enforced under S.C. Code Section 44-1-150 or by permanent revocation of the installer's license.~~

~~800.3. A Department decision involving the issuance, denial, renewal, modification, suspension, or revocation of a permit or license may be appealed by an affected person with standing pursuant to applicable law, including S.C. Code Title 44, Chapter 1 and Title 1, Chapter 23.~~

~~900. SEVERABILITY CLAUSE~~

~~This regulation is issued under the authority of Sections 44-1-140(11), 44-1-150, 44-55-827, and 48-1-10 et seq. of the 1976 Code of Laws, as amended. It shall be enforced in accordance with interpretations and public health reasons approved by the Department. Should any section, paragraph, sentence, clause or phrase of this regulation be declared unconstitutional or invalid for any reason, the remainder of this regulation shall not be affected thereby. [Repealed].~~